

C9

Page: 1566 - 1572

MAY 19-20, 2015 DUBAI UAE
International Technology and Scientific Research & Innovation
www.itsri.org

Article	TABLE OF CONTENTS	Page
322	Flux-Linkage Performance of DFIG Under Different Types of Faults and Locations <i>Mohamed Moustafa Mahmoud Sedky</i>	1546 - 1552
323	Comparative Study between Classical P-Q Method and Modern Fuzzy Controller Method to Improve the Power Quality of an Electrical Network <i>A. Morsli, A. Tlemçani, N. Ould Cherchali, M. S. Boucherit</i>	1553 - 1559
324	Study of Two MPPTs for Photovoltaic Systems Using Controllers Based in Fuzzy Logic and Sliding Mode <i>N. Ould cherchali, M. S. Boucherit, L. Barazane, A. Morsli</i>	1560 - 1565
325	Available Transmission Transfer Efficiency (ATTE) as an Index Measurement for Power Transmission Grid Performance <i>Ahmad Abubakar Sadiq, Nwohu Ndubuka Mark, Jacob Tsado, Ahmad Adam Asharaf, Agbachi E. Okenna, Enesi E. Yahaya, Ambafi James Garba</i>	1566 - 1572
326	Smart Structures for Cost Effective Cultural Heritage Preservation <i>Tamara Trček Pečak, Andrej Mohar, Denis Trček</i>	1573 - 1577
327	Improved FP-Growth Algorithm with Multiple Minimum Supports Using Maximum Constraints <i>Elsayed M. Elgaml, Dina M. Ibrahim, Elsayed A. Sallam</i>	1578 - 1585
328	Association Analysis of Putative Loci with Coronary Artery Disease <i>Asma Naseer Cheema, Attya Bhatti, Jabar Ali, John Peter</i>	1586 - 1589
329	Impact of Teacher Qualifications on the Pedagogical Competencies of University Lecturers in Northwest Nigeria (A Pilot Study Report) <i>Collins Ekpiwre Augustine</i>	1590 - 1599
330	The General Trend of FDI and the Effects of These Investments for Countries: 2000-2013 <i>Esra Cebeci</i>	1600 - 1607
331	Total Quality Management and Applications of Quality in the Public Sector <i>S. Cankaya</i>	1608 - 1612
332	Multiple Institutional Logics and the Ability of Institutional Entrepreneurs: An Analysis in the Turkish Education Field <i>Miraç Savaş Turhan, Ali Danişman</i>	1613 - 1613
333	Outsourcing the Front End of Innovation <i>B. Likar, K. Širok</i>	1614 - 1618
334	Learning with the Body: Investigating the Link between Musical Interaction and the Acquisition of Musical Knowledge <i>Jaco van den Dool</i>	1619 - 1619
335	Music Responsiveness and Cultural Practice: Tarok Ethnic Group of Plateau State in Focus <i>Johnson-Egemma Helen Amaka</i>	1620 - 1625
336	E-Marketing Strategies and Destination Branding for the Tourism Industry in Nigeria <i>Abdullahi Marshal Idris, Murtala Mohammed Alamai, Adama Jummai Idris, Bello Mohammed Gwagwada</i>	1626 - 1631
337	Deliberation of Daily Evapotranspiration and Evaporative Fraction Based on Remote Sensing Data <i>J. Bahrawi, M. Elhag</i>	1632 - 1632
338	The Use of Empirical Models to Estimate Soil Erosion in Arid Ecosystems and the Importance of Native Vegetation <i>Meshal M. Abdullah, Rusty A. Feagin, Layla Musawi</i>	1633 - 1633
339	Method to Assessing Aspect of Sustainable Development-Walkability <i>Amna Ali Nasser Al-Saadi, Riken Homma, Kazuhisa Iki</i>	1634 - 1638
340	Applications of Artificial Neural Networks in Civil Engineering <i>Naci Büyükkaracıgan</i>	1639 - 1644
341	Neural Network Approach to Classifying Truck Traffic <i>Ren Moses</i>	1645 - 1649
342	Relocation of Plastic Hinge of Interior Beam Column Connections with Intermediate Bars in Reinforced Concrete and T-Section Steel Inserts in Precast Concrete Frames <i>P. Wongmatar, C. Hansapinyo, C. Buachart</i>	1650 - 1658
343	Buckling Performance of Irregular Section Cold-Formed Steel Columns under Axially Concentric Loading <i>Chayanon Hansapinyo</i>	1659 - 1665
344	Freeze-Thaw Resistance of Concretes with BFS <i>Alena Sicakova</i>	1666 - 1669
345	Effect of Fly Ash Fineness on Sorption Properties of Geopolymers Based on Liquid Glass <i>Miroslava Zelinkova, Marcela Ondova</i>	1670 - 1674
346	Substitution of Natural Aggregates by Crushed Concrete Waste in Concrete Products Manufacturing <i>Jozef Junak, Nadezda Stevulova</i>	1675 - 1678

TABLE OF CONTENTS

Article	Page
347 Importance of Occupational Safety and Health in Dam Construction Site <i>Naci Büyükkaracıgan, Yildirim Akyol</i>	1679 - 1685
348 Preliminary Roadway Alignment Design: A Spatial-Data Optimization Approach <i>Yassir Abdelrazig, Ren Moses</i>	1686 - 1690
349 Utility Assessment Model for Wireless Technology in Construction <i>Yassir AbdelRazig, Amine Ghanem</i>	1691 - 1698
350 Preparation Control Information and Analyzing of Metering Gas System Based of Orifice Plate <i>A. Harrouz, A. Benatiallah, O. Harrouz</i>	1699 - 1704
351 A Data-Driven Monitoring Technique Using Combined Anomaly Detectors <i>Fouzi Harrou, Ying Sun, Sofiane Khadraoui</i>	1705 - 1709
352 RF Plasma Discharge Equipment for Conservation Treatments of Paper Supports <i>Emil Ghiocel Ioanid, Viorica Frunzã, Dorina Rusu, Ana Maria Vlad, Catalin Tanase, Simona Dunca</i>	1710 - 1710
353 Relaxation Dynamics of Quantum Emitters Resonantly Coupled to a Localized Surface Plasmon <i>Khachatur V. Nerkararyan, Sergey I. Bozhevolnyi</i>	1711 - 1716
354 Sensitive Detection of Nano-Scale Vibrations by the Metal-Coated Fiber Tip at the Liquid-Air Interface <i>A. J. Babajanyan, T. A. Abrahamyan, H. A. Minasyan, Kh. V. Nerkararyan</i>	1717 - 1720
355 High Gain Broadband Plasmonic Slot Nano-Antenna <i>H. S. Haroyan, V. R. Tadevosyan</i>	1721 - 1724
356 Evaluation of Alternative Energy Sources for Energy Production in Turkey <i>Naci Büyükkaracıgan, Murat Ahmet Ökmen</i>	1725 - 1731

Available Transmission Transfer Efficiency (ATTE) as an Index Measurement for Power Transmission Grid Performance

Ahmad Abubakar Sadiq, Mark N. Nwohu, Jacob Tsado, Ahmad A. Ashraf, Agbachi E. Okenna, Enesi E. Yahaya, Ambafi James Garba

Abstract—Transmission system performance analysis is vital to proper planning and operations of power systems in the presence of deregulation. Key performance indicators (KPIs) are often used as a measure of degree of performance. This paper gives a novel method to determine the transmission efficiency by evaluating the ratio of real power losses incurred from a specified transfer direction. Available Transmission Transfer Efficiency (ATTE) expresses the percentage of real power received resulting from inter-area available power transfer. The Tie line (Rated system path) performance is seen to differ from system wide (Network response) performance and ATTE values obtained are transfer direction specific. The required sending end quantities with specified receiving end ATC and the receiving end power circle diagram are obtained for the tie line analysis. The amount of real power loss load relative to the available transfer capability gives a measure of the transmission grid efficiency.

Keywords—Available transfer capability, efficiency performance, real power, transmission system.

I. INTRODUCTION

IN modern power systems, Electrical power transmission network performance issues are important as they ensure the efficiency and security of generation, transmission and distribution thereby improving system wide reliability. Worldwide, utility companies and transmission system operators (TSO) are embracing deregulated framework in electrical power sector, thereby replacing traditional and centralized controlled grid structures, resulting into increase volume of bilateral transactions as well as operation and control of power systems in different ways. Hence, transmission grids are going to be operated closer to their limits. In the structure of deregulation, generation resources are often managed and operated by independent power producers while government adequately provide the facility of economical transaction between generators and consumers [1], [2].

The transmission network delivers large volumes of

electricity from generation companies (Gencos) to load centers. Power system performance indicators have been used by utilities/Transmission system operators (TSO), this can be seen from various utility /TSO gathering to enhance power system performance by benchmarking parameters among participating utilities. Transmission system companies/operators usually measure their achievements by using various types of qualitative and quantitative assessments. The quantitative indicators are commonly known as Key Performance Indicators (KPIs). Technical and financial KPIs can be used to measure the degree of achievements through monitoring of a number of performance indicators. The technical and financial KPIs may include: System Average Interruption Frequency Index (SAIFI), System Average Interruption Duration Index (SAIDI), Energy Not Supplied (ENS), Average Interruption Time (AIT), Overhead Lines Maintenance Cost Index (OHLMI) and Substation Maintenance Cost Index (SSMCI) [3], [4]. Technical performance of electricity transmission system is also quantified using measures such as system unavailability, quality of supply and energy lost. Energy lost measured in MWh is a transmission system incident occurrence such as element outages [5].

Electric power generation facilities in Nigeria has witness increase investment in order to meet increase in demand from consumers, without a proportionate investment in transmission; coupled with the difficulties in new transmission facility-acquiring new right of ways. Optimal and reliable operations of the existing transmission interconnections is sought after as an immediate solution; hence the need to assess transmission network performance for secure operation and planning as well as avoid congestion in an emerging Nigerian power sector deregulation. ATC and TTC are both indicators of transmission system performance [6].

Besides the need to accurately and rapidly assess the real time capabilities of the transmission grid in the restructuring of the electric power industry, knowledge and understanding (in the presence of deregulated power network) of power system network performance is vital in modern frame work of electricity supply. Output from transfer capability simulations provides general network steady state parameters since it is load a flow solution, bus voltage magnitude and phases, line real and reactive power flows, line losses and hence the resulting ATC is computed. This information is vital to

A. A. Sadiq, is with the Electrical and Electronics Engineering Department Federal University Technology, Minna, P.M.B 65, NIGERIA (corresponding author phone: +23480-5787-9333; e-mail: ahmad.abubakar@futmna.edu.ng).

M. N. Nwohu, and J. Tsado is with the Electrical and Electronics Engineering Department Federal University Technology, Minna, P.M.B 65, NIGERIA.

A.A Ashraf, A. E. et. al are same as above.

ascertain the system performance within specified constraint imposed.

Nigerian 330kV transmission grid is characterized by various constraints and limitations ranging from voltage sags and instability, system collapse, slow expansion of transmission grid and transfer capability and capacity. These can be attributed to load growth and contingencies such as line outages and short falls in available generation capacity [7], [8].

Transfer Capability of transmission system is the amount of unutilized capability of the system at a given time and depends on factors such as Load demand, generation dispatch, network topology, simultaneous transfer, and power transfer between areas and the limits imposed on the transmission network due to thermal, voltage, generator reactive power and stability limits [9]. Moreover, ATC is again the transmission limit for reserving and scheduling energy transactions in competitive electricity markets. Accurate evaluation of ATC is essential to maximize utilization of existing transmission grids while the transmission system is adequately secured [10].

Transfer capability computations have been approached by numerous methods this includes: Repeated power flow [11] - [13], Continuation power flow [14] - [17], optimal power flow [1], [11] and Sensitivity analysis [18]. In this paper, ATC computation uses Hybridized continuous-repeated power flow.

II. LINE MODEL AND PERFORMANCE

A transmission line consists of conductors running over steel towers. These lines are in-between transformation stations to evacuate generated power from power stations to major load centers. The line inter-connects all power stations forming a solid network accessible by load centers. Transmission lines are usually represented on a per phase basis by their equivalent model with appropriate circuit parameters. Line to neutral voltages and one line (phase) current are used to express the terminal voltage, thus, allow a three phase system to be reduced to its equivalent single phase. Models adopted for transmission lines and used to calculate voltage, currents, and power flows are classified based on the length of the line [19]. The three models are outlined as follows:

A Short line model: Lines less than 80km length or voltage not more than 69KV

B Medium line model: Lines above 80km long but less than 250km

C Long line model: Lines of length 250km and longer

In [20] a short line model is documented. The expression for real and reactive power received over a lossless line ($B = jX', \theta_s = 0, \theta_r = 90$ and $A = \cos \beta l$) model is given by (1) and (2) respectively. Where, β, δ and l are the phase constant, power angle and the line length respectively.

$$P_{R(3\phi)} = \frac{|V_{SL-L}| |V_{RL-L}|}{X} \sin \delta \quad (1)$$

$$Q_{R(3\phi)} = \frac{|V_{SL-L}| |V_{RL-L}|}{X} \cos \delta - \frac{|V_{RL-L}|^2}{X} \cos \beta \quad (2)$$

From (1), observe that for a given system operating at constant voltage, the real power transferred is proportional to the sine of the power angle. Theoretically, the maximum power transferred under a stable steady state operating condition will occur for $\delta = 90^\circ$.

The mismatches between the sending and receiving end real and/or reactive power flows account for the line losses and expressed in (3) and (4).

$$P_{L(3\phi)} = P_{S(3\phi)} - P_{R(3\phi)} \quad (3)$$

$$Q_{L(3\phi)} = Q_{S(3\phi)} - Q_{R(3\phi)} \quad (4)$$

The plot of $Q_{R(3\phi)}$ versus $P_{R(3\phi)}$ for fixed line voltages and variable load angles is a circle; the locus of points obtained is called the receiving end power circle diagram. Such circles obtained with fixed receiving end voltages and varying sending end voltages are useful in the assessment of the performance characteristics of a transmission line [19].

III. LINE THERMAL LIMIT AND EFFICIENCY

Power handling ability of transmission line is limited by thermal loading limit and the stability limits. Thermal limits measurement (an available in manufacturer's data) establishes the current carrying capacity of a conductor, or the maximum amount of current that can flow through a transmission line or electrical equipment facility over a given period (time) before a permanent damage is sustained or before public safety requirement is violated. Often express in Amperes, it is used in Transfer Capability computation to also specify thermal limits of lines or transformers in MVA (Mega volt-ampere) or MW (Megawatts). Let the current-carrying capacity be denoted by $I_{thermal}$ and then the thermal loading of a line in VA (or MVA) is given as (5).

$$S_{thermal} = 3 \times V_{phase} \times I_{thermal} \quad (5)$$

The transmission system efficiency of a line engaged in the transfer of power is express as (6).

$$\eta = \frac{P_{R(3\phi)}}{P_{S(3\phi)}} \quad (6)$$

Where $P_{R(3\phi)}$ and $P_{S(3\phi)}$ are the total real power at both receiving and sending ends of the transmission line respectively.

IV. AVAILABLE TRANSMISSION TRANSFER EFFICIENCY (ATTE)

Amount of power transferable over a given line above already committed uses is a measure of the Available transfer capability, often limited by the line thermal loading and hence a measure of transmission system performance. Various transfer cases with contingency consideration to simulate the resulting effects on power flows while considering thermal, voltage and generator reactive power limits gives an in-depth measure of transmission system performance in the presence of various power transfer scenarios considered. In this paper, tie line inter-area ATTE was also considered in the Nigerian 330kV transmission grid. The ratio of Available real power transfer at buying (receiving) and selling (sending) end is a measure of the transmission system efficiency for a given solved transfer case and direction. Consequently, in this paper, we introduce a novel concept to determine the transmission transfer efficiency by the term Available Transmission Transfer Efficiency (ATTE). Available transmission real power transfer efficiency is then defined as the ratio of the real power transfer at the receiving (buying) and sending (selling) end bus, as given in (7):

$$ATTE_{thermal} = \frac{P_{R(3\phi)}^{atc}}{P_{S(3\phi)}^{atc}} \times 100\% \quad (7)$$

where $ATTE_{thermal}$, is the Available Transmission Transfer efficiency, the transfer here is limited by transmission thermal loading and peculiar to the specified transfer case. $P_{R(3\phi)}^{atc}$, is the real power in MW at the receiving/sink end above base case up to binding security limit which is equivalent to the ATC and $P_{S(3\phi)}^{atc}$, is the real power in MW transferred at the sending/source end above base case up to binding security limit which is equivalent to the ATC plus losses incurred resulting from a transfer direction.

Therefore, by definition, the ATC evaluation method used in this paper gives ATC as in (8):

$$ATC = \sum_{i \in RA} P_L^i(\lambda_{max}) - \sum_{i \in RA} P_L^{i0} \quad (8)$$

Where $P_L^i(\lambda_{max})$ is the i^{th} bus real power load at the maximum loading parameter while P_L^{i0} is the base case i^{th} bus real power load. RA means receiving area.

Hence, $P_{R(3\phi)}^{atc}$ is equivalent to the ATC, while $P_{S(3\phi)}^{atc}$ is the ATC plus the real power losses associated with the transfer direction. Mathematically, we have that:

$$P_S^{atc} = P_R^{atc} + P_{Loss}^{atc} \quad OR$$

$$P_S^{atc} = ATC + P_{loss}^{atc} \quad (9)$$

$$\therefore ATTE = \frac{ATC}{ATC + P_{Loss}^{atc}} \times 100\% \quad OR$$

$$\therefore ATTE = \frac{1}{1 + \frac{P_{loss}^{atc}}{ATC}} \times 100\% \quad (10)$$

The term $\frac{P_{Loss}^{atc}}{ATC}$, is the amount of loss load relative to the available transfer capability. Hence, the lower the value of $\frac{P_{Loss}^{atc}}{ATC}$, the higher will ATTE obtained.

In this paper, the Nigerian 330kV transmission grid is divided to four areas in conformity with the utility structure of Island, hence, inter-area Available transfer capability between the four identified areas are considered. The Nigerian grid modeled in PSAT environment is given in [8]

A. Area1 to Area2 Power Transfer

For line performance analysis, the transfer case is modeled such that at the maximum loading parameter which gives the Available Transfer capability, the load at the receiving end is the sum of all loads which is a member of the receiving area (i.e. area2). This is given in (11):

$$P_{L(\lambda_{max})}^{RA} = \sum_{i \in RA} P_{L(\lambda_{max})}^i \quad (11)$$

Where $P_{L(\lambda_{max})}^{RA}$, is the total real power load of the receiving area (RA) at the maximum loading parameter λ_{max} while $P_{L(\lambda_{max})}^i$ is the i^{th} bus real power load of the receiving area at λ_{max} .

B. Bus3 (Jebba TS) to Bus7 (Oshogbo)

This tie line physically connects areal to area2 only, without any physical path from areal to other areas. Radial nature of the grid makes this tie line critical to the entire grid. However, transactions involving other areas (area2, area3 and area4) with areal are equally considered to adequately analyses the tie performance. The tie line is a three phase, 50Hz, 330kV transmission line of length 157km. The line parameters are $R = 0.078\Omega/\text{km}$, $C = 0.022218\mu\text{F}/\text{km}$, $L = 0.606\text{mH}/\text{km}$. The line thermal rating is $I_{thermal} = 1360\text{A}$ [18]. Nominal π model is used in this paper for the tie line.

V. RESULTS AND DISCUSSION

Inter-area transmission transfer efficiency of the Nigerian 330kV transmission grid was considered. Table I shows the Inter - Area ATTE values among the four areas of the Nigerian grid.

TABLE I
INTER-AREA TRANSMISSION TRANSFER EFFICIENCY OF NIGERIAN GRID

		Inter-area Transmission Transfer Efficiency (%)			
		SOURCE AREAS			
Source/Sink Area		AREA 1	AREA 2	AREA 3	AREA 4
SINK AREAS	AREA 1	Void	93.88	90.89	91.64
	AREA 2	94.82	void	96.64	95.37
	AREA 3	99.91	97.91	void	97.05
	AREA 4	93.65	94.56	92.60	void

In Table II the transmission transfer efficiency of simultaneous inter-area transfer were presented. Two areas are considered as sources (sending area) among the four areas while a single sink (receiving) area different from the source areas is also chosen.

TABLE II
SIMULTANEOUS INTER - AREA TRANSMISSION TRANSFER EFFICIENCY OF NIGERIAN GRID

Sources/Sink Area		Source Areas					
		AREA 1&2	AREA 1&3	AREA 1&4	2&3	2&4	3&4
SINK AREAS	AREA 1	Void	Void	Void	94.53	93.17	91.68
	AREA 2	Void	97.07	95.52	Void	Void	97.24
	AREA 3	91.17	Void	98.99	Void	98.56	Void
	AREA 4	89.37	88.82	Void	95.23	Void	Void

The radial nature of the Nigerian 330kV transmission grid prompted the reason for tie line transmission performance. Outage of these lines could cause undue risk to part or the entire system with black out or system collapse being the resulting effects [18].

The performance of the tie line is obtained under different inter-area Available transfer capability. The receiving end power circle diagram, voltage profile and line load ability curves are equally obtained for a specified inter-area power transfer which is the specified receiving end quantities.

Table III gives the total receiving area load of inter-area Available Transfer Capability of Nigerian 330kV grid. All receiving area loads are assumed to be at 0.9 PF lagging. For each transfer case in Table III, we determine the tie line performance. The tie line performance analysis is carried out with respect to each of the following.

- ✓ To calculate sending end quantities for specified receiving end MW and MVAR
- ✓ Obtain the receiving end power circle diagram
- ✓ Obtain load ability curve and voltage profile

At a power factor of 0.9 lagging, the Mvar at the receiving end are obtained and given in Table IV.

TABLE III
REAL POWER LOADS (IN MW) AT THE RECEIVING AREA OF INTER-AREA TRANSFER OF NIGERIAN 330KV GRID

Source/Sink Area		SOURCE AREAS			
		AREA 1	AREA 2	AREA 3	AREA 4
SINK AREAS	AREA 1	void	801.61	1046.06	823.42
	AREA 2	1486.93	void	1576.79	1272.31
	AREA 3	450.00	333.28	void	336.59
	AREA 4	606.49	495.79	801.36	Void

Table V gives the line performance quantities obtained for specified receiving end MW and MVar. Observe that the inter-area ATC from area1 to area2 results in higher transmission loss and hence unacceptably high percentage voltage regulation. Series and shunt capacitors can be used to compensate the line in order to improve the line performance.

In Table VI a comparison is made between network response and rated sys path ATTE. The comparison is further depicted in Fig. 4. In transaction numbers 8 to 12, the rated system path method of ATC for those transfers is limited by both a generator transformer and a generator reactive power limit; this implies zero real power loss and hence zero tie line loss ratio. The rated path ATTE is seen as too optimistic as clearly shown in Fig. 4.

TABLE IV
REACTIVE POWER LOAD (IN MVAR) AT THE RECEIVING AREA OF INTER-AREA TRANSFER OF NIGERIAN 330KV GRID

Source/Sink Area		SOURCE AREAS			
		AREA 1	AREA 2	AREA 3	AREA 4
SINK AREAS	AREA 1	void	426.47	506.61	398.74
	AREA 2	720.52	void	564.61	564.71
	AREA 3	217.83	163.41	void	163.41
	AREA 4	293.72	240.11	388.10	void

Fig. 1 gives the receiving end power circle diagram with fixed sending V_s end and varying receiving V_r end voltage. V_r varies from V_s to 1.3 V_s . The tie line voltage variation in practice is allowed up to 1.1 V_s .

As shown in Fig. 2, it is observed that while Transmission efficiency decreases with increase in real power loss, percentage voltage regulation increases with increase in real power loss both resulting from inter-area power transfer.

Fig. 3 shows the voltage profile for length up to one eight of wavelength under various scenarios of no load, surge impedance level (SIL), short circuit condition and rated load conditions.

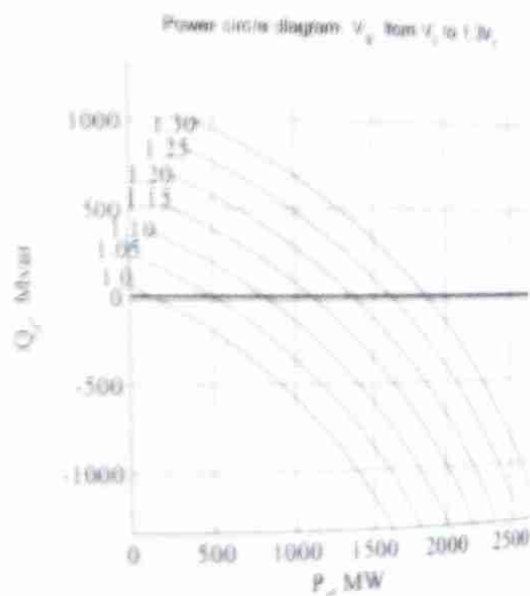


Fig. 1 Power circle diagram of tie line connecting area1 to area2

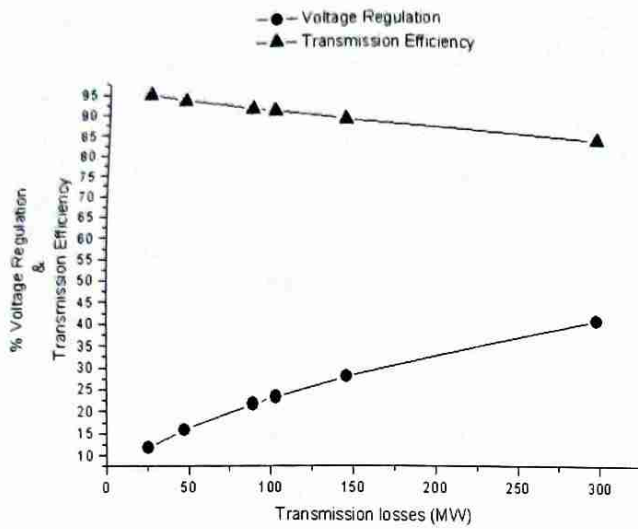


Fig. 2 Transmission Real power loss with respect to voltage regulation and efficiency

In Fig. 4 a comparison is made between rated system path method of ATTE and network response method, the Tie line (Rated system path) performance is seen to differ from system wide (Network response) performance, hence the rated system path method provide a too optimistic ATTE. Fig. 5 shows the tie line load ability curve under three limits: practical line load ability, theoretical stability limit and the thermal limit, all for up to one fourth of the wavelength. SIL obtained is 659.39MW at 30°

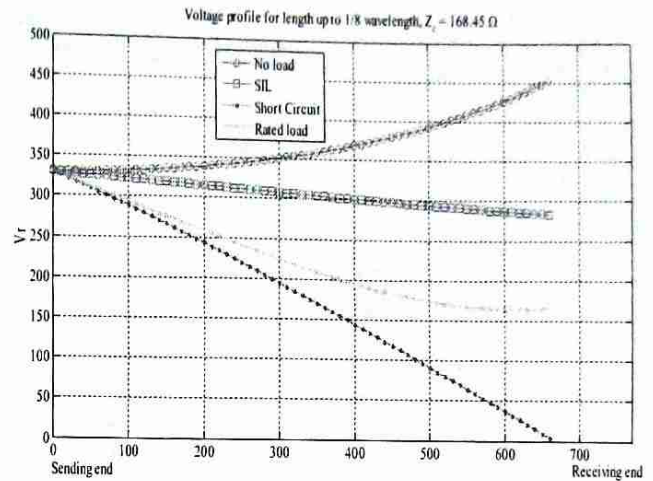


Fig. 3 Voltage profile of the tie line under various loading condition

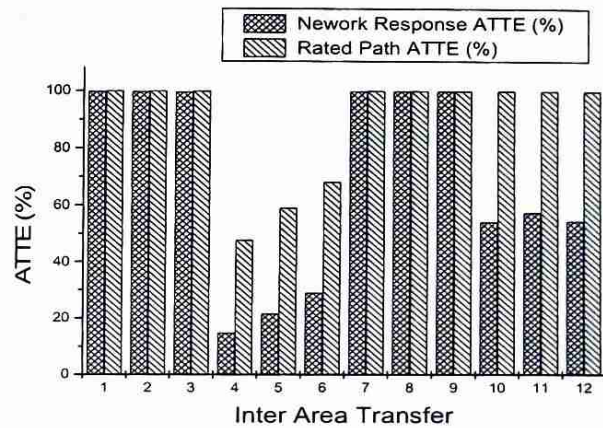


Fig. 4 Comparison between network response and rated system ATTE

TABLE V
TIE LINE PERFORMANCE FOR SPECIFIED RECEIVING END ATC (PR)

Transfer	Vr (Volts)	Vs (Volts)	Required Sending ANGLE	Pr (MW)	Ps (MW)	Ploss (MW)	Is (A)	Ir(A)	% Voltage Regulation	Efficiency (%)
Area1 TO Area2	330	458.43	-25.84	1486.93	1784.61	297.68	2759.91	2890.48	41.23	83.32
Area1 To Area3	330	362.72	5.52	450.00	475.59	25.59	793.12	874.62	11.74	94.62
Area1 To Area4	330	376.56	7.05	606.49	654.01	47.52	1086.23	1178.97	16.00	92.73
Area2 To Area1	330	401.46	9.49	881.41	983.94	102.53	1606.64	1713.40	23.67	89.58
Area3 To Area1	330	416.69	10.81	1046.06	1191.57	145.51	1919.69	2033.46	28.37	87.78
Area4 To Area1	330	396.15	9.00	823.42	912.59	89.17	1496.56	1600.66	22.04	90.23

TABLE VI
COMPARISON BETWEEN NETWORK RESPONSE AND RATED SYSTEM ATTE VALUES

S/N	Transfer direction		ATC (MW)	Network Real power loss (MW)	Tie line real power loss	$\frac{P_{Loss}}{ATC}$ Network Loss Ratio	$\frac{P_{Loss}}{ATC}$ Tie line ratio	Network response ATTE (%)	Rated System Path ATTE (%)
	Source Area	Sink Area							
1	Area1	Area2	121.43	53.37	11.82	0.44			
2	Area1	Area3	120.00	46.78	11.66	0.39	0.10	99.64	99.92
3	Area1	Area4	114.69	54.52	11.67	0.48	0.10	99.68	99.92
4	Area2	Area1	2.61	39.25	7.50	15.04	0.10	99.59	99.91
5	Area2	Area3	3.28	39.15	7.51	11.94	2.87	14.79	47.60
6	Area2	Area4	4.00	39.31	7.53	9.83	2.29	21.56	58.89
7	Area3	Area1	167.26	53.96	7.93	0.32	1.88	28.93	68.01
8	Area3	Area2	213.30	44.61	0.00	0.21	0.05	99.81	99.97
9	Area3	Area4	309.56	62.00	0.00	0.20	0.00	99.90	100.00
10	Area4	Area1	6.58	37.01	0.00	5.62	0.00	99.94	100.00
11	Area4	Area2	7.01	36.75	0.00	5.24	0.00	53.91	100.00
12	Area4	Area3	6.59	36.61	0.00	5.56	0.00	57.21	100.00
							0.00	54.26	100.00

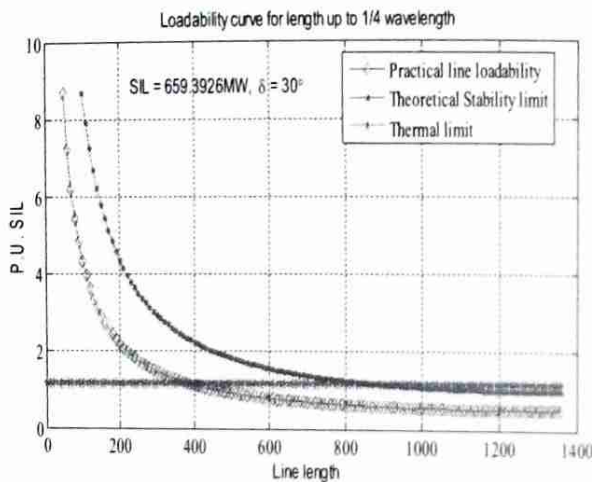


Fig. 5 Tie line load ability curve for Area 1 TO Area 2 Transfer (Jebba TS to Oshogbo)

VI. CONCLUSION

In this paper, Available Transmission Transfer efficiency (ATTE) is used to measure the performance of a tie line and the Nigerian 330kV transmission grid through inter-area transfer implementation, thereby taking into account the real power losses resulting from inter-area transfer capability. A plot of reactive power against the real power at the receiving end gives the power circle diagram. The results shows that while Transmission efficiency decreases with increase in real power loss, percentage voltage regulation increases with increase in real power loss both resulting from inter-area power transfer. It is therefore concluded that ATTE is dependent on direction of transfer, method of ATC and transmission losses incurred due to a transfer direction.

REFERENCES

- [1] Marannino, P., Bresesti, P., Garavaglia, A., Zanellini, F., & Variati, R. (2002). Assessing the Transmission Transfer Capability Sensitivity to Power System Parameters. 14th PSCC, (pp. 1-7). Sevilla.
- [2] NERC. (1996). Available Transfer Capability Definitions and Determination. New York: North American Electric Reliability Council.
- [3] Omar, H. A., Masoud, A.-T., Mohammed, A.-w., Khalfan, A.-Q., Saqar, A.-F., Ibrahim, A.-B., et al. (2009). Key Performance Indicators of a Transmission System. Sultanate of Oman: Oman Electricity Transmission Company.
- [4] Arthit, S.-Y. (2009). System and Network Performance Indicators for the Electricity Generating Authority of Thailand: Current and Future ones. Journal of Practical Electrical Engineering, 1 (1), 8-20.
- [5] Abu Dhabi Transmission and Dispatch Company TRANSCO. (2011). Electricity Networks Annual Technical Report. Abu Dhabi.
- [6] Labo, H. S. (2010). Investors Forum for the Privatisation of PHCN Successor Companies. Abuja: Transmission Company of Nigeria.
- [7] Onahaebe, O., & Apeh, S. (2007). Voltage Instability in Electrical Network: A case study of Nigerian 330kV Transmission Grid. Research Journal of Applied Sciences 2 (8), 865 - 874.
- [8] Sadiq, A., & Nwohu, M. (2013). Evaluation of Inter- Area Transfer Capability of Nigerian 330kV Network. International Journal Engineering and Technology Vol. 3 No. 2, 148-158.
- [9] Hamoud, G. (2000). Feasibility Assessment of simultaneous bilateral transaction in a deregulated environment. IEEE Transaction on power system, 15 (1):22-6.
- [10] Liu, C.-C., & Li, G. (2004). Available Transfer Capability Determination. Abuja: Third NSF Workshop on US-Africa Research and Education Collaboration.
- [11] Yan, O., & Chanan, S. (2002). Assessment of Available Transfer Capability and Margins. IEEE Transaction on Power systems, vol. 17, no. 2, 463-468.
- [12] Mark, H. G., & Chika, N. (1999). Available Transfer Capability and First order Sensitivity. IEEE Transaction on Power System, 512-518.
- [13] Babulal, C., & Kannan, P. (2006). A Novel Approach for ATC Computation in Deregulated Environment. J. Electrical Systems 2-3, 146-161.
- [14] Venkataramana, A., & Colin, C. (1992). The Continuation Power Flow: A Tool for Steady State Voltage Stability Analysis. IEEE Transactions Power System, 416-423.
- [15] Ejebe, G., Tong, J., Waight, J., Frame, J., Wang, X., & Tinney, W. (1998). Available Transfer Capability Calculations. IEEE Transaction on Power Systems, Vol.13, No.4, 1521-1527.
- [16] Hsiao-Dong, C., Alexander, J. F., Kirit, S. S., & Neal, B. (1995). CPFLOW: A Practical Tool for Tracing Power System Steady-State Stationary Behavior Due to Load and Generation Variations. IEEE Transaction on Power Systems, Vol.10, No. 2, 623-633.

