

THE 22<sup>ND</sup>

INTERNATIONAL CONFERENCE  
AND 42<sup>ND</sup> ANNUAL GENERAL MEETINGS

OF THE NIGERIAN INSTITUTION OF

**AGRICULTURAL ENGINEERS**

*(A DIVISION OF NIGERIAN SOCIETY OF ENGINEERS)*



Theme:

**Innovative Agricultural  
Mechanization and Rural  
Development For Economic Transformation  
And Food Security**

SEPTEMBER

20<sup>TH</sup> – 24<sup>TH</sup>

2022

---

**BOOK OF FULL PROCEEDINGS**



Asaba, Delta State, Nigeria

Edited by:

**Engr. Dr. Ndukwu Macmanus Chinenye**

(Department of Agricultural and Bioresources Engineering,  
Michael Okpara University of Agriculture Umudike)



Proceedings of 22<sup>nd</sup> international conference and 42<sup>nd</sup> annual general meetings of the Nigerian  
Institution of Agricultural Engineers (A division of Nigerian Society of Engineers)



### WELCOME REMARK

On behalf of National Executive Council, members of the Local Organizing Committee, I want to welcome you for participation in the International Conference on Agricultural Engineering of the Nigerian Institution of Agricultural Engineers (NIAE) holding in Asaba, Delta State, Nigeria between September 20 and 23 2022. This is the third time in the history of NIAE when the conference will hold in South-South Region of Nigeria. The first time was in Yenagoa, Baysa State in January 2006. The second was in Uyo, Akwa Ibom State in October 2013. This is however the first time that the conference will be holding in Delta State State of Nigeria

The Conference was initially scheduled to hold in Calabar, Cross Rivers State but had to be moved to Delta because they were not ready. Asaba is a rapidly growing city in Nigeria with an International Airport and good road network as well as infrastructure. The airport links Lagos and Abuja hence the choice of the venue apart from the fact that it is an Agrarian State. The main aim of this International Conference to provide a forum for engineers and associated professionals for sharing of information and knowledge on current research developments, achievements and practical applications in all disciplines related to Agricultural, Food and Bioresources Engineering.

The theme of the conference is “Innovative Agricultural Mechanization and Rural Development for Economic Transformation and National Food Security”. Agricultural mechanization places a key role in sufficiency in Agricultural and National Food Security. We are in a time as a state and nation when economic transformation is germane for our survival. Innovations in Agricultural mechanization becomes vital in order to encourage our small holder farmers who contributes a greater percentage in Food production. It is of note that agricultural production cannot be without appropriate agricultural engineering systems in place. The challenge now is innovate the available technologies and modernize for increased production and economic transformation.

We welcome you to make your contributions through presentations at this conference. The keynote and lead papers' speakers are well experienced and exposed in their chosen area. They are active members of International Commission of Agricultural Engineering (CIGR), American Society of Agricultural and Biological Engineers (ASABE), Canadian Society of Bio Engineering, Nigerian Society of Engineers. There is no doubt that the conference will be enriched by the presentations from these experts. Opportunities will also be opened for comprehensive discussion on specific fields of interest and for initiation of joint activities, collaborations and developing ideas for innovations. The conference will consist of invited papers, oral presentations, technical and social events. English will be the official language in this International Conference.

Accepted papers will be published in the proceedings for the conference. You are most welcome to one of the fastest developing city and state in Nigeria – Delta State.

**Engr. Professor Akindele Folarin Alonge**

(FNIAE, FAEng, FNSE, FSN, MNIM, MASABE, MNIFST, MCSBE, MISHS, MPASAE)

NIAE National Chairman



Proceedings of 22<sup>nd</sup> international conference and 42<sup>nd</sup> annual general meetings of the Nigerian  
Institution of Agricultural Engineers (A division of Nigerian Society of Engineers)



### National Executive Council

Engr. Prof. A. F. Alonge, FAEng, FNSE, FNIAE	National Chairman
Engr. Prof. J. C. Adama, FNIAE, MNSE	National Vice Chairman
Engr. Prof. S. M. Musa, FNSE, FNIAE	Immediate Past National Chairman
Engr Godwin A. Adoga, MNSE, MNIAE, MAutoEI	National Secretary
Engr. Dr. Chukwuemeka Jude Ohagwu, MNIAE, MNSE	National Assistant Secretary
Engr. Dr. Bala Jahun Gambo, MNIAE, MNSE	Nat. Financial Secretary
Engr. Mrs. A. L. Musa-Makama, MNIAE, MNSE	Treasurer
Engr. Mrs. N. Nwagugu MNIAE, MNSE	Publicity Secretary
Engr. Olanrewaju Stephen Aniyi, FNIAE, MNSE	Publication Secretary
Engr. Sabiu Bello, FNIAE, MNSE	Ex-officio I
Engr. Dr. Ikpe Jimmy Udom, MNIAE, MNSE	Ex-officio II
Engr. Mrs. Bimbo Olokose, MNIAE, MNSE	Auditor I
Engr. Mrs. Adamade, C. A., MNIAE, MNSE	Auditor II
Engr. Dr. Yomi Kasali, FNIAE, FNSE	Executive Director NCAM
Engr. Mrs. R. S. Yusuf, MNIAE, MNSE	Business Manager
Engr. Prof. J. O. Olaoye, FNIAE, MNSE	Editor-in-Chief & Chairman, Editorial Board
Engr. O. A. Lawal, FNIAE, MNSE	Regional Chairman (NW)
Engr. Prof. Bashir, FNIAE, MNSE	Regional Chairman (NE)
Engr. Prof. P. Idah, MNIAE, MNSE	Regional Chairman (NC)
Engr. Prof. E. A. Echiegu, FNIAE, MNSE	Regional Chairman (SE)
Engr. Augustine Ubong, MNIAE, MNSE	Regional Chairman (SS)
Engr. Dr. Bamidele Dahunsi, MNIAE, MNSE	Regional Chairman (SW)
Prof. A.P. Onwualu, FNIAE, FNSE	Chairman Board of Fellows and Awards

### Central/Local Organizing Committee (LOC)

Engr. Chris Ayidu	LOC Chairman
Engr. Oki P. Y	Vice Chairman
Engr. Maduka Arnold	Secretary
Engr. Mrs Ogor Ikoko	Member
Engr. Nwachukwu Boi	Member
Engr. Nwakor Emeke Kester	Member
Engr. Kweve Edema	Member
Engr. Maidoh Toritseyone	Member

### Sub-committees

#### Technical Committee

Engr. Dr. M.C Ndukwu	Chairman
Engr. Dr. N. R. Nwakuba	Member



Proceedings of 22<sup>nd</sup> international conference and 42<sup>nd</sup> annual general meetings of the Nigerian  
Institution of Agricultural Engineers (A division of Nigerian Society of Engineers)



Engr. Dr. Desmond Amaefule	Member
Engr. Dr. Chikwue Maxwell Ikenna	Member
Engr. Ifiemi Ocholi-Tulagha	Member
Engr. Nwakor Emeke Kester	Member
Engr. Onyugbo Chinedu N.	Member
Engr. Dr. O. O. Okorafor	Member
Engr. A. I. Suleiman	Member
Prof. B. A. Alababan	Member

**Fund Raising/Finance Committee**

Engr. Chris Ayidu	Chairman
Engr. Dr. (Mrs) Ebieren Oturo	Member
Engr. Mrs Ogor Ikoko	Member
Engr. Nwosu Chukwudi	Member
Engr. Ifiemi Ocholi-Tulagha	Member
Engr. Afe Kelvin	Member
Engr. Edmund Biboye (NIAE Balyesa)	Member

**Welfare/Protocol Committee**

Engr. Mrs Ogor Ikoko	Chairman
Engr. Mrs Rita Ezeh	Member
Engr. Nwachukwu Boi	Member
Engr. Mrs Maidoh	Member
Engr. Kweve Edema	Member

**Exhibition Committee**

Prof. Mike Enaiboifo (Uniben)	Chairman
Engr. Okonkwo P C N	Member
Engr. Gbenga Atanda – Auchu Poly	Member
Engr. Kamal Yusuf – Auchu Poly	Member

**Registration Committee**

Engr. Maduka Arnold	Chairman
Engr. Anizor Prosper	Member
Engr. Dr. Chikwue Maxwell Ikenna	Member
PG Students	Member

**Transportation Committee**

Engr. Okpako Peter	Chairman
Engr. Oki P. Y	Member



Proceedings of 22<sup>nd</sup> international conference and 42<sup>nd</sup> annual general meetings of the Nigerian Institution of Agricultural Engineers (A division of Nigerian Society of Engineers)



### Excursion Committee

Engr. Ovie Ighotegunor	Chairman
Engr. Oki P Y	Member
Engr. Maduka Arnold	Member

### Publicity and publications committee

Engr. Oki P Y	Chairman
Engr. Maidoh Toritseyone	Member
Engr. Nwakor Emeke Kester	Member

### ICT Committee

Engr. Ezekiel Aregbe	NIAE WebMaster
Engr. Ikewun Christain	Chairman
Engr. Nwakor Emeke Kester	Member

### International Scientific Committee and Advisers

Prof Michael Ngadi	McGill University, Montreal, Canada
Prof Klein Ileleji	Purdue University, Indiana, USA/ASABE AMAA Co-leader
Prof Michael Faborode	Obafemi Awolowo University, Ile-Ife, PASAE President
Prof Peter Onwualu	African University of Science and Technology. Abuja, President, Nigerian Academy of Engineering
Prof. A. F. Alonge	University of Uyo, Nigeria/National Chairman, Nigerian Institution of Agricultural Engineers
Prof Linus Opara	Stellenbosch University, South Africa Immediate Past President, PASAE
Prof M. G. Yisa	Kwara State University, Malete. Ilorin/Former Nigerian Ambassador to Japan
Prof Babatunde Adewumi	Federal University of Agriculture, Abeokuta Nigeria/Former National Chairman, Nigeria/National Chairman, Nigerian Institution of Agricultural Engineers
Prof Joshua Olaoye	University of Ilorin, Ilorin/ Incoming President of ISTRO
Prof S. Z. Abubakar	NAERLS, ABU, Zaria, Nigeria, Former National Chairman, Nigeria/National Chairman, Nigerian Institution of Agricultural Engineers
Prof Shuiab Musa	ATBU, Bauchi, Nigeria/Immediate Past Chairman, Nigerian Institution of Agricultural Engineers
Prof Babagana Mohammed	Chairman, NIAE International Affairs Committee
Prof Joseph Adama	Michael Okpara Univ of Agriculture, Umudike/CPC Chairman
Engr Christopher Ayidu	Chair, LOC Chairman



## Table of Contents

Title Page		i
Welcome Address		ii
National Executive Council		iii
Central Local Organizing Committee		iii
LOC Members		iii
International Scientific Committee And Advisers		v
Table of Contents		vi
<b>Lead Papers</b>	<b>Presenters</b>	xii
Agro Processing, Appropriate Storage Technology And Value Addition: Catalysts For Rapid Agricultural Development And Food Security In Nigeria.	Marcus O. Ogunbiyi	xiii
Rural development, economic transformation and food security through sustainable mechanization of agriculture	Engr. Prof. Sabbas Nwabueze Asoegwu	xxiii
<b>Articles</b>	<b>Authors</b>	
Effect Of Microclimate Parameters on Local Poultry Bird Production: Kila Ogun State Case Study	Qazeem O. Ogunlowo, Iyiola T. Onatola, Noah T. Fadele, Joseph T Ate, Oluwatoyin B. Adegbokan, Muibat A. Akande, Adedayo A. Azeez	2
Precipitation Change Projection Utilizing General Circulation Models Over Ondo North Region, Nigeria	Olotu Y., Oguntunde P.G., Atanda, E.O. and Ibrahim R.	10
Development Of Psychro-Automated Data Acquisition System for Environmental monitoring in Built Environments	Ohagwu C. J., F. C. Okechukwu, J.N. Nwakaire, V.A. Ohagwu, S.N.Ugwu, and F.U.Asoiro	22
Evaluation of The Impacts of Climate Change on Cassava Water Requirements In Edo State, Nigeria	Olotu Y., Atanda E.O., Ibrahim R. And Sule M.	37
Production and Characterization Of Biomass Briquette from Neem leaves and Paper-Waste Blends: An Alternative To Cooking Firewood	Sabastine Habila, Mohammed Mustapha and Babagana Mohammed	46



Proceedings of 22<sup>nd</sup> international conference and 42<sup>nd</sup> annual general meetings of the Nigerian Institution of Agricultural Engineers (A division of Nigerian Society of Engineers)



Cassava Grating Machine	Nasirudeen, W.A. Adesope And F.O. Ogunso	
Determination of Mass Transfer Parameters During Deep-Fat Frying of Fried Melon Cake ( <i>Robo</i> )	Adekanmi O. Abioye <sup>1</sup> , James A. Adeyanju , Adefemiwa A. Adekunle, Okunloye A. Adepoju, Ajeigbe S. Olajire <sup>1</sup> , Emmanuel O. Sangotayo	411
Leapfrogging Africa's Agriculture and Food Systems for Sustainable Development: Challenges And Opportunities.	Nwakaire, J. N. Anyadike, C.C., Ogbuagu, N. J., Nwakaire, E. N., And Ejiogu, E. C, Nyambane, A.	423
Effect of Temperature and Hysteresis on Monolayer Moisture Content of Moringa Seed Grit During Storage	Akintunde Akintola, Ademola Kabir Aremu and Babatunde Olayinka Oyefeso	444
The Role of Digital Agricultural Practices Towards Food Security In Nigeria	Kalu P.N, Okolo E.A and Ihemereze C. N	453
Mathematical Model for Predicting Whole Kernel Recovery of A Palm NutCracking Machine Using Mixed Variety Of Palm Nut	Sam, E. O., Ndirika, V. I. O., Edet, J. A., Udom, I. J.	458
Effects of Cocopeat and Rice Husk Wastes on Growth And Yield of Cucumber In Soilless Greenhouse Culture	M.I. Chikwue, R.I. Ezem and N.R. Nwakuba	469
Suitable Drying Model for Bloodmeal Production From A Fresh Red Bororobull's Blood Using A Convective Oven.	Izunna Ijezie Asoegwu and Amaefule, Desmond Okechukwu.	475
Drying Kinetics, Energy Requirement, Bioactive Composition And Mathematical Modeling of Allium Cepa Slices	Felix U. Asoiro <sup>1</sup> , Meshack I. Simeon, Chinenye E. Azuka, Harami Solomon <sup>1</sup>	488
Nanotechnology- Enabled Innovations In Agricultural Production	N.I. Amalu <sup>1</sup> , N.I. Nwagugu <sup>1</sup> , and C. Ocheri	501
The Applications of Solar Energy In Agriculture	N.I. Amalu, N.I. Nwagugu, I.L. Ezigbo and M.U. Ude	507
Evaluation of Yam Storage Practices In Kaura Local Government Area of Kaduna State	Y. A. Unguwanrimi, S.A. Okaiyeto and R. S Mohammad	513
Effects of Drying Methods on the Drying Rate of Plantain ( <i>Musa Paradisiaca</i> )	Oyebanre O.D., Uthman F., *Bashiru F.O. and Gambari A.B	518
Towards Promoting African Indigenous Additive Formulations to Vegetable Oil Based Cutting Fluids For Sustainable	Y Ayorinde A. Olufayo <sup>1</sup> , Victor Songmene, Oluwole A. Olufayo, Ayodeji James Akindele	525



**Nigerian Institution of Agricultural Engineers**  
**(A Division of the Nigerian Society of Engineers)**



# ***Certificate of Presentation***

*This is to certify that*


**Felix U. Asoiro , Meshack I. Simeon, Chinenye E. Azuka, Harami Solomon**

***presented a paper titled:***

**Drying Kinetics, Energy Requirement, Bioactive Composition  
And Mathematical Modeling of Allium Cepa Slices**

**at the 22ND INTERNATIONAL CONFERENCE AND 42ND ANNUAL GENERAL MEETING  
of the Nigerian Institution of Agricultural Engineers, held at the Unity Hall,  
Government House Asaba, Delta State, Nigeria  
from 20th - 24th September, 2022.**

**Technical Committee Chairman**



**National Chairman**



## DRYING KINETICS, ENERGY REQUIREMENT, BIOACTIVE COMPOSITION AND MATHEMATICAL MODELING OF ALLIUM CEPA SLICES

Felix U. Asoiro<sup>1\*</sup>, Meshack I. Simeon<sup>2</sup>, Chinenye E. Azuka<sup>3</sup>, Harami Solomon<sup>1</sup>

<sup>1</sup>Department of Agricultural and Bioresources Engineering University of Nigeria, Nsukka, Nigeria  
Africa Centre of Excellence for Sustainable Power and Energy Development (ACE-SPED)  
University of Nigeria, Nsukka

\*Email: [felix.asoiro@unn.edu.ng](mailto:felix.asoiro@unn.edu.ng); [felixasoiro@gmail.com](mailto:felixasoiro@gmail.com)

<sup>2</sup>Department of Agricultural and Bioresources Engineering, Federal University of Technology, Minna, Nigeria

<sup>3</sup>Department of Food Science and Technology University of Nigeria, Nsukka, Nigeria

### Abstract

The drying kinetics, specific energy consumed (SEC), effective moisture diffusivity (EMD), flavonoid, phenolic and vit. C contents of onion slices dried under convective oven drying (COD) were compared with microwave drying (MD). Drying was performed with onion slice thicknesses of 2, 4, 6 and 8 mm; air drying temperatures of 60, 80, and 100°C for COD and microwave power of 450 W for MD. A decrease in slice thickness and increase in drying air temperature led to a drop in the drying time. As thickness increased from 2 – 8 mm, EMD rose from  $1.1 - 4.35 \times 10^{-8}$  at 60°C,  $1.1 - 5.6 \times 10^{-8}$  at 80°C and  $1.25 - 6.12 \times 10^{-8}$  at 100°C with MD treatments yielding the highest mean value ( $6.65 \times 10^{-8} \text{ m}^2 \text{ s}^{-1}$ ) at 8 mm. Maximum SEC for onion slices in COD was 238.27 kWh/kg H<sub>2</sub>O (2 mm thickness) and the minimum was 39.4 kWh/kg H<sub>2</sub>O (8 mm thickness) whereas maximum during MD was 25.33 kWh/kg H<sub>2</sub>O (8 mm thickness) and minimum, 18.7 kWh/kg H<sub>2</sub>O (2 mm thickness). MD treatment gave a significant ( $p \leq 0.05$ ) increase in the flavonoid (39.42 – 64.4%), phenolic (38.0 – 46.84%) and vit. C (3.7 – 4.23 mg 100 g<sup>-1</sup>) contents while COD treatment at 60°C and 100°C had positive effects on only vit. C and phenolic contents respectively. In comparison, the Weibull model gave the overall best fit (highest  $R^2=0.999$ ; lowest  $SSE=0.0002$ ,  $RSME=0.0123$  and  $\chi^2=0.0004$ ) when drying 2 mm onion slices at 100°C.

**Keywords:** Allium cepa, drying kinetics, specific energy consumption, flavonoid, vitamin C, microwave oven drying.

### 1. Introduction

*Allium cepa L* (onion) is one very profound perishable and largely consumed biennial horticultural crops that are grown across the entire globe (Sagar et al., 2020), which is used for its nutritional and health values. Drying process has long been regarded as an efficient means to increase the shelf-life of crops and create value-added products as well as the reduction in the cost of postharvest handling (Sagar et al., 2020). Drying brings about moisture removal from agricultural products to a certain extent, under controlled conditions, leading to a drop in weight and volume, which is a very vital parameter for storage and transportation (Sakare et al. 2020). Drying also reduces enzymatic activities, diminishes the rate of microbial growth and undesirable chemical changes and enhances the concentration of nutrients and phytochemicals.

All through the decades, convective oven drying (COD) has been generally regarded as one of the most inexpensive, dominant and long-utilized drying methods in the culinary and food industries. This involves concurrent mass exchange prompting the expulsion of moisture from the intercellular spaces of the agricultural products to the ambient environment by means of evapo-diffusion (Castro et al. 2018).



Microwave drying (MD) has attracted a lot of global attention in recent times. During MD short frequency electromagnetic waves are released. As the waves penetrate the cells of the biomaterial, polar molecules, like salts and water, vibrate and cause the transportation of ions, thereby leading to the quick conversion of microwave energy to heat within the sample. Improved product quality, reduced drying time, improved energy consumption, enhanced volumetric heating and lower operating cost are some of the advantages of MD.

Dried onions as powder, granules and flakes are used as culinary ingredient in most processed foods e.g snacks sauces, onion flavored meat, soups products, and salad dressings (Süfer et al., 2018), as a substitute to the fresh form, because of the concentrated nutrients, flavor, aroma and phytochemicals as well as increased storage capacity.

Simulation and modeling of drying processes under varying process conditions is very vital in gaining efficient control over drying processes and an overall best enhancement of the quality of the resultant end product. Models are usually employed to investigate the process parameters needed to predict drying kinetics of biomaterials and to optimize such operating variables (Kaveh et al. (2021). Drying process involving food and vegetable materials ordinarily happen in the falling rate time frame (Agbede et al. (2020). In predicting mass exchange during drying under the falling rate period, a few numerical models are required.

From the industrial perspective, the need for the drying kinetics of onion slices is extremely important and has gained traction in recent times so as to be able to save energy and optimize drying conditions. Therefore, this study aims to explore the drying of onion slices (2 – 8 mm thickness) by contrasting the drying behaviour of the samples utilizing two diverse drying systems like COD (60 – 100°C) and MD (450 W). In addition, the drying parameters of the equations, EMD, activation energy, and specific energy consumption were equally estimated. Some qualitative properties of the sample such as phenolic, flavonoid and vitamin C contents were also investigated.

## 2. Materials and method

### 2.1 Sample preparation of onion

Matured and ripe onion (*Allium cepa*) was procured from a known onion farmer in Ogige Main Market, Nsukka City, Enugu State, Nigeria. Uniform onion sizes were selected and stored in a refrigerator (6°C). Using a digital weight balance (A-200DS Digital Analytical Balance, Denver Instruments, Germany), 120 kg of onion was measured and the average initial moisture content (MC) of the samples was estimated at  $89.35 \pm 0.5\%$  (wet basis) by dehydration at  $72 \pm 1^\circ\text{C}$  for 24 hr according to oven drying method (AOAC, 1990). The onion was neatly cut into slices of various thicknesses (2, 4, 6 and 8 mm) using a stainless-steel knife.

### 2.2 Drying experiments

#### 2.2.1 COD

A laboratory oven (CD21, Gallekamp) was used for the drying. An anemometer (Lutron AM-4202; Electronic Enterprise Co., Taipei, Taiwan) was used to measure the inside air velocity of the oven as  $1.0 \text{ ms}^{-1}$ .

#### 2.2.2 MD

The drying experiment was performed with a Haier thermocool laboratory microwave oven (HTMO-Trendy slv D90D25EL-QF) with maximum output power of 900 W.

### 2.3 Analysis of drying characteristics

Equations (1 & 2), (3), (4 - 6) were used to evaluate the moisture content (MC) (w.b & db), drying rate (DR) and moisture ratio (MR) respectively for the onion slices (Agbede et al., 2020):



$$MC = \frac{W_w - W_d}{W_w} \quad (1)$$

$$MC = \frac{W_w - W_d}{W_d} \quad (2)$$

$$DR = \frac{M_{t1} - M_{t2}}{t_2 - t_1} \quad (3)$$

$$MR = \exp\left(-\left(\frac{t}{\alpha}\right)^\beta\right) \quad (4)$$

$$MR = \frac{M_t - M_e}{M_o - M_e} \quad (5)$$

$$MR = \frac{M_t}{M_o} \quad (6)$$

Where, MC is moisture content (% wb) or (% db);  $W_w$  is Total mass of wet sample (g);  $W_d$  is Mass of sample after drying (g); DR is drying rate (% hr<sup>-1</sup>);  $M_{t1}$  and  $M_{t2}$  are moisture contents (% w.b) at  $t_1$  and  $t_2$ ;  $t_1$  and  $t_2$  are different drying times (hour) during drying; MR is moisture ratio,  $\alpha$  is the scale parameter (min), which represents drying rate constant,  $\beta$  is the shape parameter, which relates to the drying rate and moisture transfer mechanism in the drying process;  $M_t$  is moisture content at any time (% wet basis);  $M_e$  is equilibrium moisture content (% wet basis);  $M_o$  is initial moisture content (% wet basis)

Equation (4) was used in calculating the MR of the onion slices during thin-layer drying. Oftentimes, values for the equilibrium moisture content ( $M_e$ ) is relatively small compared with  $M_o$  or  $M_t$ . Then, Equ. (5) can be simplified as Equ. (6) (Süfer and Palazoğlu, 2019).

#### 2.4 Determination of effective moisture diffusivity (EMD), total energy consumed, specific energy consumption (SEC) and activation energy (AE)

Numerous complex processes are involved in mass and heat transfer during the drying of agricultural and food items. Capillary tube movement, molecular penetration and hydrodynamic flow, or surface propagation are difficult to analyze. Fick's second law is normally employed to measure such processes (Agbede et al. 2020). As a result, effective moisture diffusion is described by Equation (7) (Kaveh et al., 2021) which is further expressed as Equation (8).

$$\frac{\partial M}{\partial t} = D_{eff} \nabla^2 M \quad (7)$$

$$\frac{dM}{dt} = D_{eff} \frac{d^2 M}{dr^2} \quad (8)$$



For long drying measure ( $MR < 0.6$ ) and assuming rectangular geometry for the onion, negligible surface resistance to heat and mass exchange flow within the onion, uniform mass exchange and distribution of initial moisture for the onion and approximating the coefficient to a uniform value all through the experiment, Equ. (8) can be expressed as shown in Equ. (9) (Süfer and Palazoğlu, 2019)

$$D_{eff} = \frac{-4L^2}{\pi^2 t} \ln\left(\frac{MR\pi^2}{8}\right) \quad (9)$$

Where  $D_{eff}$  is effective moisture diffusivity ( $m^2s^{-1}$ ),  $L$  is half the thickness of the slices (m),  $MR$  is moisture ratio and  $t$  is the drying time (Secs).

Total energy consumed (TEC) for MD could be computed by the expression in Equ. 10 (Agbede et al., 2020)

$$E_{tMD} = P_{MD} \times t_{MD} \quad (10)$$

The specific energy consumed (SEC) of the onion during the MD treatment, which is defined as the amount of energy utilized to evaporate one kilogram of  $H_2O$  from the material, was determined using Equ. (11) (Taghinezhad et al., 2020).

$$SEC_{MD} = \frac{P_{MD} \times t_{MD}}{M_w} \quad (11)$$

Where  $E_{tMD}$  is total energy consumed (kWhr),  $SEC_{MD}$  is the specific energy consumed (kWh  $kg^{-1}H_2O$  removed),  $P_{MD}$  is microwave oven power (kW),  $t_{MD}$  is the entire drying duration (hr) and  $M_w$  is the weight of water evaporated (kg).

The activation energy (AE) for the MD ( $E_{aMD}$ ) ( $W g^{-1}$ ) was computed by the Arrhenius type model relating  $D_{eff}$ , mass (kg) and microwave power ( $W$ ) as shown in Equ. (12) (Agbede et al. 2020).

$$D_{eff} = D_o \exp\left(\frac{E_{aMD} \times M}{P}\right) \quad (12)$$

Equ. (13) is obtained when (12) is expressed in a logarithmic form.

$$\ln(D_{eff}) = \ln(D_o) - \left(\frac{E_{aMD}}{P}\right)(M) \quad (13)$$

By plotting  $\ln(D_{eff})$  versus  $(m/P)$ , the slope ( $K_2$ ) (Equ. 14) is computed for the MD and needed for computing the AE for the MD system (Equ. 15).

$$K_2 = Slope = E_{aMD} \quad (14)$$

$$E_{aMD} = K_2 \quad (15)$$

TEC and SEC submitted for COD were determined by the expressions in Eqs. (16) and (17) respectively (Agbede et al., 2020)



$$E_{tCOD} = AV\ell_a C_a (T_{in} - T_{amb}) \times D_t \quad (16)$$

$$E_{sCOD} = \frac{E_{tCOD}}{M_w} \quad (17)$$

Where, A is the area of the tray (m<sup>2</sup>), the velocity of air (m s<sup>-1</sup>),  $\ell_a$  is the density of air (kg m<sup>-3</sup>), C<sub>a</sub> is the specific heat capacity of air (1828.8 kJ kg<sup>-1</sup> °C<sup>-1</sup>), T<sub>amb</sub> is the ambient temperature (°C), T<sub>in</sub> is inlet temperature (°C), D<sub>t</sub> is the entire drying duration (s) and M<sub>wthe</sub> is the weight of water evaporated from the sample (kg)

The relationship between diffusion coefficient and the temperature was also expressed by an Arrhenius-type model (Equ. 18)

$$D_{eff} = D_o \exp\left(\frac{E_{aCOD}}{R_g T_a}\right) \quad (18)$$

Activation energy (AE) for the COD (E<sub>aCOD</sub>) was evaluated by plotting the D<sub>eff</sub> curve against the corresponding reciprocal of absolute air temperature (T<sub>a</sub>) (Jebri et al. 2019).

Where D<sub>o</sub> and R<sub>g</sub> are constant and universal gas (8.3143 kJ mol<sup>-1</sup>) constant respectively

Applying the logarithms, Equ. (18) could be expressed in linear form as shown in Equ. (19).

$$\ln(D_{eff}) = \ln(D_o) - \left(\frac{E_{aCOD}}{R_g}\right) \left(\frac{1}{T_a}\right) \quad (19)$$

By plotting the graph of ln(D<sub>eff</sub>) against (1/T<sub>a</sub>), the slope K<sub>1</sub> can be obtained as shown in Equ. (20) which will enable the computation of the activation energy for the COD using Equ. (21).

$$K_1 = \frac{E_{aCOD}}{R_g} \quad (20)$$

$$E_{aCOD} \times R_g \quad (21)$$

## 2.5 Mathematical modeling of drying curves and fitting of models to drying data

The SPSS software (version 21) was utilized to fit the mathematical models in Table 1. Statistical parameters such as of SSE, RMSE,  $\chi^2$  and R<sup>2</sup> calculated from equations 22, 23, 24 and 25 respectively using Microsoft Excel and SPSS software (version 21) were utilized to select appropriate drying descriptors. Drying models with the greatest R<sup>2</sup> and least SSE, RMSE and  $\chi^2$  was chosen as the most suitable model for portraying the drying kinetics.

$$SSE = \frac{1}{N} \sum_{i=1}^N (MR_{exp,i} - MR_{pred,i})^2 \quad (22)$$

$$RMSE = \left[ \frac{1}{N} \sum_{i=1}^N (MR_{exp,i} - MR_{pred,i})^2 \right]^{1/2} \quad (23)$$

$$\chi^2 = \frac{\sum_{i=1}^N (MR_{exp,i} - MR_{pred,i})^2}{N - z} \quad (24)$$



$$R^2 = 1 - \frac{\sum_{i=1}^N (MR_{pred,i} - MR_{exp,i})^2}{\sum_{i=1}^N (MR_{pred,i} - \overline{MR_{exp,i}})^2} \quad (25)$$

Where  $MR_{pred,i}$  is the  $i^{th}$  predicted values of the moisture ratio calculated using the models,  $MR_{exp,i}$  is the  $i^{th}$  experimental moisture ratio calculated using the models, N is the number of observations and z is the number of constants in each model.

Table 1. Some empirical models used for the onion drying kinetics

S/N	Model Name	Model Equation	Constants/Coefficient
1	Linear	$MR = 1 + bt$	Karacabey (2016)
2	Newton	$MR = \exp(-kt)$	Doymaz (2012)
3	Page	$MR = \exp(-kt^n)$	Omari et al. (2018)
4	Henderson and Pabis	$MR = a \exp(-kt)$	Srikanth et al. (2019)
5	Two Term	$MR = a \exp(-k_o t) + b \exp(-k_1 t)$	Liter et al. (2018)
6	Approximation of diffusion	$MR = a \exp(-kt) + (1 - a) \exp(-kbt)$	Abbaszadeh et al. (2011)
7	Midilli Kucuk	$MR = a \exp(-kt^n) + bt$	Doymaz (2018)
8	Wang and Singh	$MR = 1 + at + bt^2$	Agbede et al.(2020)
9	The linear-plus-exponential	$MR = a \exp(-kt^n) + bt + c$	Thanimkarn et al. (2020)
10	Modified Page	$MR = \exp(-(kt)^n)$	Ertekin and Firat (2017)
11	Logarithmic	$MR = a \exp(-kt) + c$	Jebri et al. (2019)
12	Modified Henderson and Pabis	$MR = a \exp(-kt) + b \exp(-gt) + c \exp(-ht)$	Ertekin and Firat (2017)
13	Two Term Exponential	$MR = a \exp(-kt) + (1 - a) \exp(-kat)$	Ertekin and Firat (2017)
14	Cavalcanti-Mata	$MR = a_1 \exp(-k_1 t^{n1}) + a_2 \exp(-k_1 t^{n2}) + a_3$	Silva et al. (2014)
15	Verma	$MR = a \exp(-kt) + (1 - a) \exp(-gt)$	Makokha et al. (2021)

## 2.6 Determination of bioactive compounds and vit. C content

### 2.6.1 Determination of phenolic content and flavonoid contents

The total phenol content was assessed with the Folin- Ciocalteu's measure utilizing gallic acid as standard (Sasongko et al., 2020).

Total flavonoid content was assessed by Aluminium chloride (AlCl<sub>3</sub>) technique utilizing quercetin as a standard for the calibration curve (Azeez et al., 2012).

### 2.6.2 Determination of vitamin C content



Vit. C content (ascorbic acid) was assessed by utilizing 2,6 dichlorophenol–indo-phenol (Merck KGaA, Darmstadt, Germany) tritometric technique according to AOAC method No. 967.21 (AOAC, 2000).

## 2.7 Statistical analysis of data

The outcomes acquired for the various properties of the dried *Allium cepa* were subjected to descriptive inferential statistical analysis using SPSS, version 21; Excel software, Windows 10; Multiple comparisons test with the mean values in ANOVA were performed utilizing the least significant difference (LSD) and Fisher ratio (F), and statistical significance was set at 5% ( $p < 0.05$ ). The outcomes were expressed as mean values  $\pm$  standard deviation.

## 3. Results and Discussion

### 3.1 Results

Table 1 presents the calculated values for all the MD (450W) and COD experiments (60, 80, and 100°C air drying temperature and air velocity of 1 m s<sup>-1</sup>), the calculated values for the coefficient of regression ( $R^2$ ), SSE, RMSE and  $\chi^2$  ranged between 0.516 - 0.999, 0.0002 – 0.1431, 0.0015 - 0.3783, and 0.0004 - 1.0017, respectively.

From the summary of the examined models (Table 2), the Weibull, Midilli Kucuk, Two Term, Wang and Singh and Modified Page were considered to be the best models that satisfactorily described the drying behaviour of onion slices (2, 4, 6, and 8 mm thickness) for both the COD (60, 80 and 100°C) and MD (450 W). The other different models showed no solid fit.

From Table 2, the Weibull model was seen to best depict the drying conduct of 2, 4, and 6 mm thick onion slices at 60°C; 2, 4, 6, and 8 mm thick onion slices at 80°C; 8 mm thick onion slices at 100°C during COD treatment; and 2 and 6 mm onion thickness during MD (450 W) treatment with highest  $R^2$  (0.999) and least SSE (0.0002), RMSE (0.0123) and  $\chi^2$  (0.0004) values accomplished was during 2 mm thick COD treatment at 100°C drying temperature. Wang and Singh, Modified Page and Midilli Kucuk models were seen to perfectly describe the drying curve of 2, 4 and 6 mm thick onion slices respectively at 100°C. During COD treatment (450 W), the Wang and Singh model most appropriately fitted the 4 and 8 mm thick onion slices, with  $R^2$  values of 0.982 and 0.979 respectively.

In model comparison among COD and MD, the Weibull model gave the overall general best fit (highest  $R^2=0.999$ ; lowest SSE=0.0002, RSME=0.0123 and  $\chi^2=0.0004$ ) when drying 2 mm onion slice at 100°C. For the drying characteristics and modeling of apple slices during microwave intermittent drying, Dai *et al.* (2019) reported Weibull as the best fit with  $R^2 = 0.999$ , RMSE = 0.0091,  $\chi^2 = 0.0011$ . However, Agbede *et al.* (2020) reported Wang and Singh model as best fitted for both the thin layer open sun and solar drying of the green microalgae (*Chlorella sp.*) biomass paste while the logarithmic and two-term models were identified to best describe the drying kinetics of scent and lemon basil leave at 70 °C and 60 °C respectively (Mbegbu *et al.*, 2021). Similarly, Kaveh *et al.* (2021) reported that the Page Model with the maximum values of  $R^2$  (0.9997–0.9999), and the least RMSE (0.0159–0.0754) and  $\chi^2$  (0.0003–0.0011) best described the drying kinetics of pomegranate arils under COD (50 – 70°) at 1 m s<sup>-1</sup> air velocity and MD (270 – 630 W). Differences may be due to the drying system employed and type/nature of the biomass.



Table 2. Summary of statistical parameters of thin layer mathematical models for convective oven drying (60, 80 and 100°C) and microwave drying (450 W) of onion slices

Drying Type	Slice Thickness (mm)	Model Name(s)	Highest R <sup>2</sup>	Lowest SSE	Lowest RMSE	Lowest $\chi^2$
COD 60°C	2	Weibull	0.955	0.0062	0.0790	0.0137
	4	Weibull	0.971	0.0038	0.0015	0.0083
	6	Midilli Kucuk and Weibull	0.988	0.0013	0.0362	0.0021
	8	Two-Term	0.978	0.0025	0.0497	0.0039
COD 80°C	2	Midilli Kucuk and Weibull	0.985	0.0021	0.0462	0.0043
	4	Midilli Kucuk and Weibull	0.990	0.0012	0.0341	0.0023
	6	Midilli Kucuk and Weibull	0.993	0.0012	0.0345	0.0024
COD 100°C	8	Midilli Kucuk and Weibull	0.996	0.0005	0.0227	0.0010
	2	Wang and Singh	0.991	0.0011	0.0335	0.0016
	4	Modified Page	0.998	0.0014	0.0370	0.0019
	6	Midilli Kukuk	0.998	0.0004	0.0187	0.0008
MD	8	Midilli Kucuk and Weibull	0.994	0.0008	0.0279	0.0018
	2	Weibull	0.999	0.0002	0.0123	0.0004
	4	Wang and Singh	0.982	0.0023	0.0481	0.0008
	6	Weibull	0.982	0.0024	0.0493	0.0030
	8	Wang and Singh	0.979	0.0026	0.0510	0.0030

### 3.2 Discussion

#### 3.2.1 Drying characteristics

During COD treatment, increased air-drying temperature from 60 to 100°C resulted in increased water activity and mass exchange ratio because of ascend in heat energy occasioned by the rise in air temperature, prompting the decrease in the drying time and energy consumption. MD significantly shortened the drying duration for all the slices. The shortest drying time of 120 min was achieved with the MD at 450 W (1 d), compared to COD method at 60°C (270 min) (1 a), 80°C (180 min) (1 b) and 100°C (150 min) (1 c) (Figure 1). Reduction in slice thickness also resulted in reduction in the drying times. MR decreased significantly during drying operations until complete dehydration of the onion slices was achieved, showing that by employing the two drying methods, moisture was effectively removed from the un-dried samples

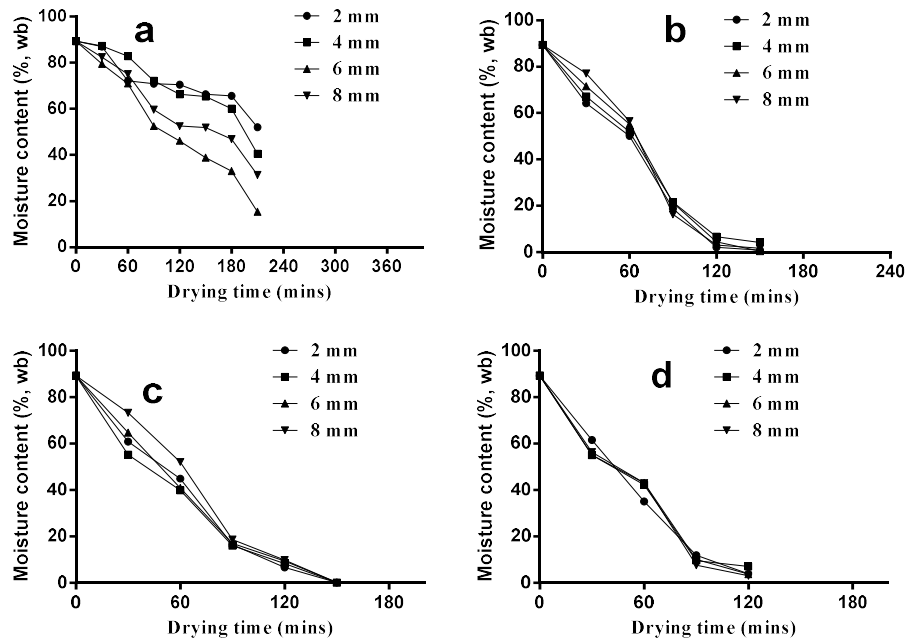


Figure 1. Curves of moisture content against drying time for various slice thicknesses submitted to convective oven drying, COD(a, 60°C; b, 80°C; c, 100°C and microwave drying, MD (d, 450 W)

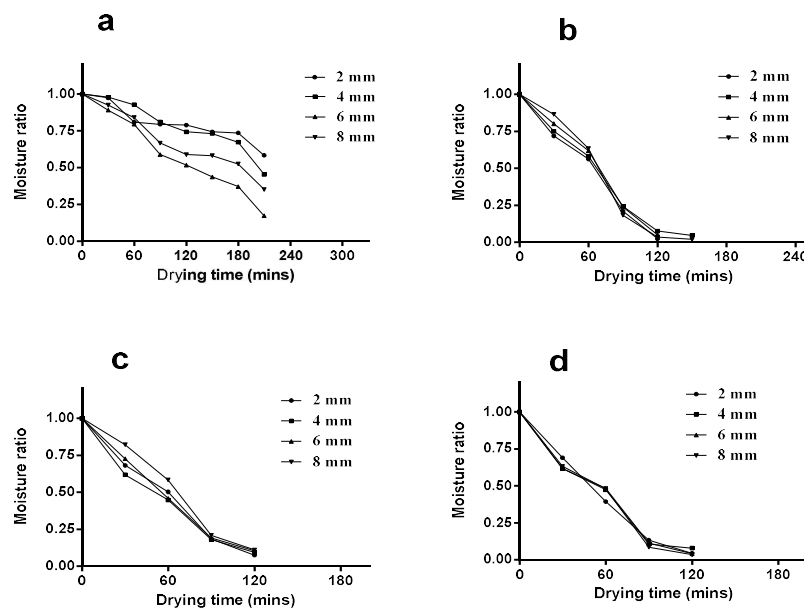


Figure 2. Curves of moisture ratio versus drying time for various slice thicknesses submitted to convective oven drying, COD(a, 60°C; b, 80°C; c, 100°C and microwave drying, MD (d, 450 W)

### 3.2.2 Effective moisture diffusivity, total energy consumed, specific energy consumption and activation energy

From Table 3, effective moisture diffusivity (EMD) is positively correlated to both drying temperature and slice thickness for COD treatment. This report affirms the direct relationships between EMD and drying air temperature, showing that increase in the drying air temperature results in an increment in EMD and a decrease in the drying time (Kaveh et al., 2021). The increase in drying air temperature could lead to the activation of water molecules within the samples, accelerating the transfer of water molecules thereby causing increased water diffusion (Liu et al., 2015). In the present study, values ranged between  $1.1 - 6.12 \times 10^{-8} \text{ m}^2 \text{ s}^{-1}$  for COD and  $1.49 - 6.65 \times 10^{-8} \text{ m}^2 \text{ s}^{-1}$  for MD treatment. As slice thickness increased from 2 – 8 mm, EMD rose from  $1.1 - 4.35 \times 10^{-8}$  at 60°C,  $1.1 - 5.6 \times 10^{-8}$  at 80°C and  $1.25 - 6.12 \times 10^{-8}$  at 100°C.

Table 3. Effective moisture diffusivity of onion slices in different drying air temperatures

Slice thickness (mm)	Effective moisture diffusivity ( $\times 10^{-8} \text{ m}^2 \text{ s}^{-1}$ )			
	60°C	80°C	100°C	MD (450 W)
2	1.1	1.1	1.25	1.49
4	2	2.28	3.31	4.25
6	3.32	2.59	3.37	4.31
8	4.35	5.6	6.12	6.65

SEC values in drying 2, 4, 6, and 8 mm onion slices under COD with temperatures of 60, 80 and 100°C and under MD with the power of 450 W are presented in Figure 3. It is obvious that SEC is negatively correlated to both drying temperature and slice thicknesses of onion slices. Increasing drying temperature resulted an increase in the SEC. Similarly, as slice thickness increased SEC also increased (Kaveh et al., 2021). For the COD experiments, the SEC value obtained was in the range of 39.4 - 238.27 kWh/kg H<sub>2</sub>O. The highest (238.27 kWh/kg H<sub>2</sub>O, at 2 mm thickness) and lowest (39.4 kWh/kg H<sub>2</sub>O, at 8 mm thickness) SEC values were utilized at drying temperatures of 60 and 100°C, respectively.

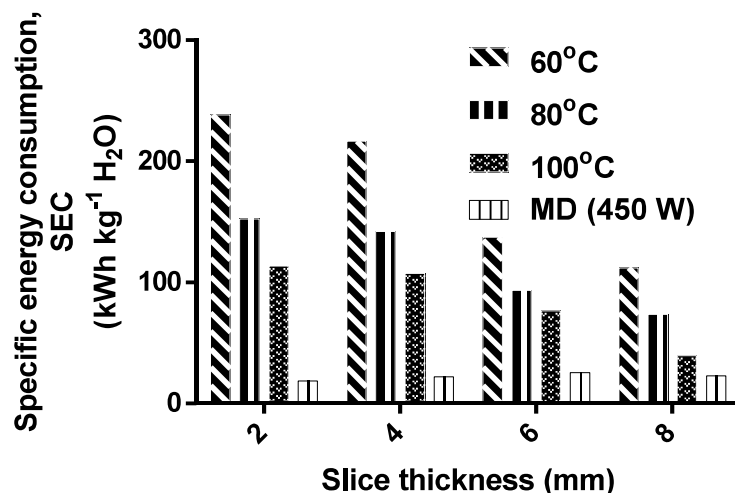


Figure 3. Effects of drying air temperature and onion slice thickness on the specific energy consumption

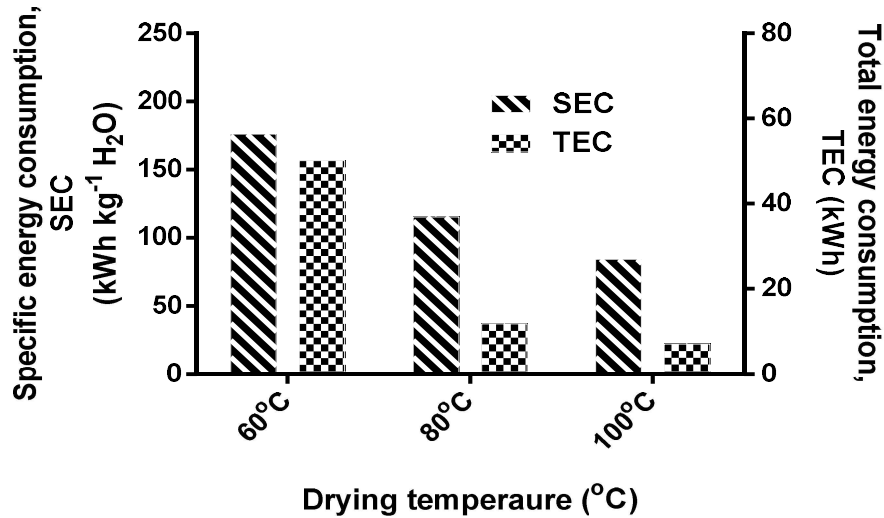


Figure 4. Graph of specific energy consumption (SEC) and total energy consumption (TEC) versus drying temperature

From Table 4, the highest values of activation energy (AE) obtained during onion drying under COD and MD systems were 71.42 kJ mol<sup>-1</sup> (2 mm slices) and 34.52 W g<sup>-1</sup> (6 mm slices) respectively (Table 5). MD treatments commanded the lowest AE values. Drying systems, air temperature and slice thicknesses were vital parameters influencing the AE. It is established that increasing temperature reduces the AE as a result of increased moisture loss and higher mass transfer from onions slices (Kaveh et al., 2021). In the present study, the mean AE values under MD (450 W), COD (60°C), (80°C) and (100°C) were 29.96 W g<sup>-1</sup>, 66.80 kJ mol<sup>-1</sup>, 56.51 kJ mol<sup>-1</sup> and 59.32 kJ mol<sup>-1</sup> respectively.

Table 4. Effects of slice thickness and temperature on total energy (E<sub>t</sub>), specific energy (E<sub>s</sub>) consumed and activation energy (E<sub>a</sub>) submitted to microwave drying (MD) and convective oven drying (COD)

Slice thickness (mm)	Energy for microwave drying (450 W)			Activation energy for convective oven drying E <sub>aCOD</sub> (kJ mol <sup>-1</sup> )		
	E <sub>tMD</sub> (kWh )	E <sub>sMD</sub> (kWh/kg H <sub>2</sub> O)	E <sub>aMD</sub> (W g <sup>-1</sup> )	60°C	80°C	100°C
2	1.35	18.70	27.82	71.42	65.18	68.48
4	1.13	22.02	25.79	68.22	63.31	66.87
6	1.35	25.33	34.52	64.03	50.52	53.16
8	1.35	22.88	31.69	63.52	47.04	48.76
<b>MEAN</b>	<b>1.295</b>	<b>22.23</b>	<b>29.96</b>	<b>66.80</b>	<b>56.21</b>	<b>59.32</b>

### 3.2.3 Bioactive compounds and vitamin C. content

Effects of convective oven drying (COD) (60°C, 80°C and 100°C) and microwave drying (MD) (450 W) on the flavonoid, phenolic and vit. C contents of onion slices is presented in Figure 5. MD (450 W) and COD (60, 80, and 100°C) treatments had significant effects on the flavonoid, phenolic and vit. C contents of onion. Significant (p ≤ 0.05) increase in the flavonoid, phenolic and vit. C contents from 39.42 – 64.4%, 38.0 – 46.84%, and 3.7 – 4.23 mg 100 g<sup>-1</sup> respectively were obtained for onion slices that were treated with MD at 450 W powers compared to the

fresh un-dried (FUD) samples. This finding is consistent with the report of Ozcan-Sinir et al. (2018) that microwave drying and vacuum drying were able to yield higher quantity of bioactive compounds from kumquat (*Citrus japonica*) slices. A significant increase in the phenolic content was noticed in onion samples subjected to COD treatments at drying air temperatures of 80°C (40.19%) and 100°C (46.32%) except for 60°C (37.72%).

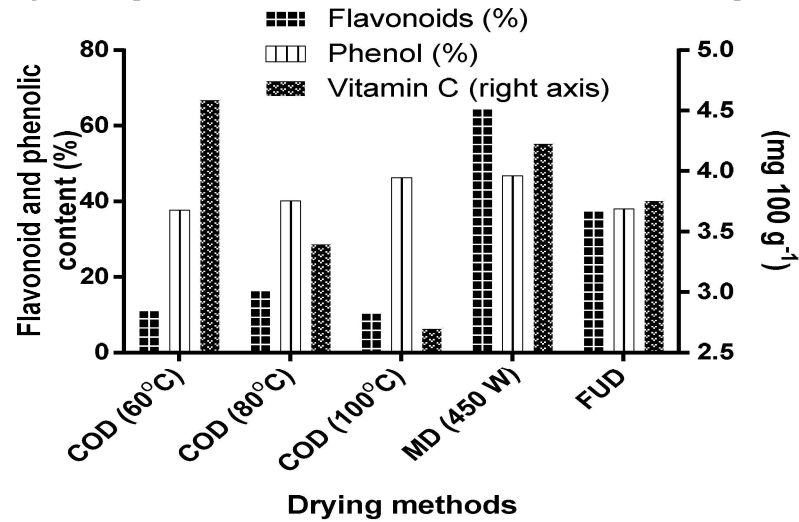


Figure 5. Effects of convective oven drying and microwave drying on the flavonoid, phenolic and vit. C contents of onion

### Conclusion

The results revealed that drying air temperatures and slice thickness had significant effects ( $p \leq 0.05$ ) on the drying kinetics, specific energy consumed (SEC), effective moisture diffusivity (EMD), flavonoid, phenolic and vit. C contents of onion slices dried under convective oven drying (COD) and microwave drying (MD). An increase in drying air temperature and reduction in slice thickness brought about decrease in the drying duration. Drying time of onion slices was shorter under MD than COD. Weibull model was the most appropriate in predicting the drying behaviour of 2 mm thick onion slices at 100°C (highest  $R^2=0.999$ ; lowest  $SSE=0.0002$ ,  $RSME=0.0123$  and  $\chi^2=0.0004$ ). As thickness increased from 2 – 8 mm, EMD rose from  $1.1 - 4.35 \times 10^{-8}$  at 60°C,  $1.1 - 5.6 \times 10^{-8}$  at 80°C and  $1.25 - 6.12 \times 10^{-8}$  at 100°C with MD treatments yielding the highest mean value ( $6.65 \times 10^{-8} \text{ m}^2 \text{ s}^{-1}$ ) at 8 mm. Maximum SEC for onion slices in COD was 238.27 kWh/kg H<sub>2</sub>O (2 mm thickness) and the minimum was 39.4 kWh/kg H<sub>2</sub>O (8 mm thickness) whereas maximum during MD was 25.33 kWh/kg H<sub>2</sub>O (8 mm thickness) and minimum, 18.7 kWh/kg H<sub>2</sub>O (2 mm thickness). MD treatment gave a significant ( $p \leq 0.05$ ) increase in the flavonoid (39.42 – 64.4%), phenolic (38.0 – 46.84%) and vit. C (3.7 – 4.23 mg 100 g<sup>-1</sup>) contents while COD treatment at 60°C and 100°C had positive effects on only vit. C and phenolic contents respectively.

### Acknowledgements

The authors are grateful to the Department of Agricultural and Bio-resources Engineering, Department of Food Science and Technology and the National Centre for Energy Research and Development (NCERD), University of Nigeria, Nsukka for providing facilities for the study.

### Conflict of interest



The authors state no conflict of interest

## References

- Agbede, O.O., Oke, E.O., Akinfenwa, S.I., Wahab, K.T., Ogundipe, S., Aworanti, O.A., Arinkoola, A.O., Agarry, S.E., Ogunleye, O.O., Osulale, F.N., & Babatunde, K.A., (2020). Thin layer drying of green microalgae (*Chlorella* sp.) paste biomass: Drying characteristics, energy requirement and mathematical modeling. *Bioresource Technology Reports*. <https://doi.org/10.1016/j.biteb.2020.100467>.
- AOAC- Association of Official Analytical Chemists. (1990). Official Methods of Analysis (15th ed.). Washington DC: Association of Official Analytical Chemist.
- AOAC- Association of Official Analytical Chemists. (2000). Official Methods of Analysis (17th ed.). Gaithersburg MD: Association of Official Analytical Chemist.
- Azeez, L., Adeoye, M.D., Majolagbe, T.A., Lawal, A.T., & Badiru, R. (2012). Antioxidant activity and phytochemical contents of some selected Nigerian fruits and vegetables. *American Journal of Chemistry*, 2(4), 209-213. DOI: 10.5923/j.chemistry.20120204.04.
- Castro, A.M., Mayorga, E.Y., & Moreno, F.L. (2018). Mathematical modelling of convective drying of fruits: a review. *J Food Eng.* 2018;223:152–67. doi: 10.1016/j.jfoodeng.2017.12.012.
- Dai, J., Xiao, H., Zhang, L., Chu, M., Qin, W., Wu, Z., Han, D., Li, Y., Liu, Y., & Yin, P. (2019). Drying characteristics and modeling of apple slices during microwave intermittent drying. *J Food Process Eng.*, e13212.
- Jebri, M., Desmorieux, H., Maaloul, A., Saadaoui, E., & Romdhane, M. (2019). Drying of *Salvia officinalis* L. by hot air and microwaves: dynamic desorption isotherms, drying kinetics and biochemical quality. *Heat Mass Transf.*, 55,1143–53. doi: 10.1007/ s00231-018- 2498-9.
- Kaveh, M., Golpour, I., Gonçalves, J.C., Ghafouri, S., & Guiné, R. (2021). Determination of drying kinetics, specific energy consumption, shrinkage, and colour properties of pomegranate arils submitted to microwave and convective drying. *Open Agriculture*, 6, 230–242.
- Mbegbu, N.N., Nwajinka, C.O., & Amaefule, D.O. (2021). Thin layer drying models and characteristics of scent leaves (*Ocimum gratissimum*) and lemon basil leaves (*Ocimum africanum*). *Heliyon*, 7, e05945. <https://doi.org/10.1016/j.heliyon.2021.e05945>.
- Ozcan-Sinir, G., Ozkan-Karabacak, A., Tamer1, C.E., & Copur, D.U. (2018). The effect of hot air, vacuum and microwave drying on drying characteristics, rehydration capacity, color, total phenolic content and antioxidant capacity of Kumquat (*Citrus japonica*). *Food Science and Technology*. DOI <https://doi.org/10.1590/fst.34417>.
- Sagar, N.A., Pareek, S., & Gonzalez-Aguilar, G.A. (2020). Quantification of flavonoids, total phenols and antioxidant properties of onion skin: a comparative study of fifteen Indian cultivars. *J Food Sci Technol*. <https://doi.org/10.1007/s13197-020-04277-w>.
- Sakare, P., Prasad, N., Thombare, N., Singh, R., & Sharma, S.C. (2020). Infrared drying of food materials: recent advances. *Food Eng Rev.*, 12, 381–98. doi: 10.1007/s12393-020- 09237- w.
- Sasongko, S.B., Hadiyanto, H., Djaeni, M, Perdanianti, A.M., & Utari, F.D. (2020). Effects of drying temperature and relative humidity on the quality of dried onion slice. *Heliyon*, 6, e04338.
- Süfer, Ö., &Palazoğlu, T.K. (2019). A study on hot-air drying of pomegranate. *J Therm Anal Calorim.*, 137, 1981–90. doi: 10.1007/ s10973-019-08102-1.
- Süfer, Ö., Demir, H., & Sezer, S. (2018). Convective and microwave drying of onion slices regarding texture attributes. *Czech Journal of Food Science*, 36, 187–193.
- Taghinezhad, E., Kaveh, M., Jahanbakhshi, A., & Golpour, I. (2020). Use of artificial intelligence for the estimation of effective moisture diffusivity, specific energy consumption, color and shrinkage in quince drying. *J Food Process Eng.*, 43, e13358. doi: 10.1111/jfpe.13358.