





FEDERAL UNIVERSITY OF TECHNOLOGY, MINNA
SCHOOL OF ELECTRICAL ENGINEERING AND TECHNOLOGY &
SCHOOL OF INFRASTRUCTURE, PROCESS ENGINEERING AND TECHNOLOGY

3rd INTERNATIONAL ENGINEERING CONFERENCE IEC 2019

THEME THE ROLE OF ENGINEERING AND TECHNOLOGY IN SUSTAINABLE DEVELOPMENT

BOOK of PROCEEDINGS

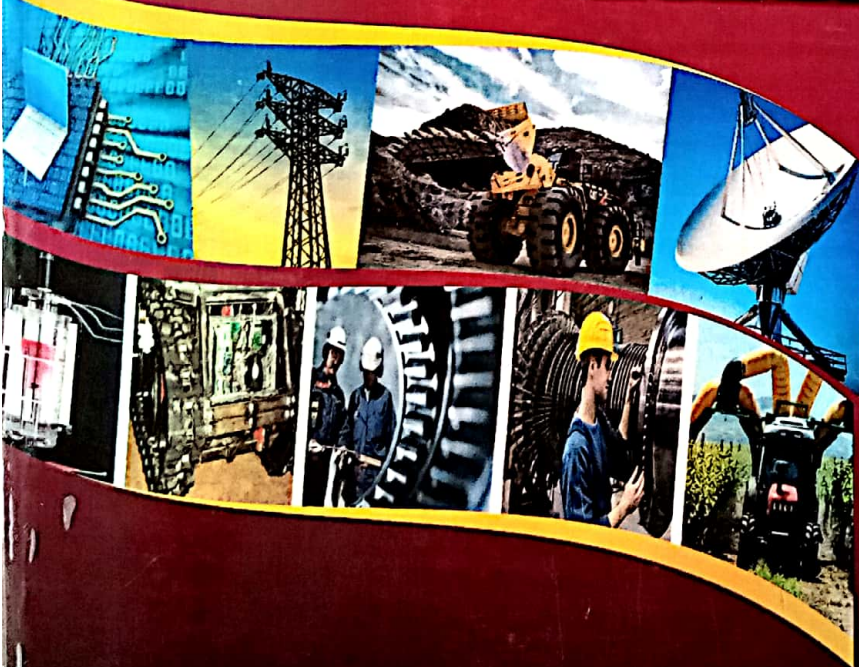

DATE:
24TH - 26TH
SEPTEMBER 2019

VENUE:
CHEMICAL ENGINEERING
LECTURE THEATER, FEDERAL
UNIVERSITY OF TECHNOLOGY,
MINNA, NIGER STATE

EDITED BY

ENGR. DR. S.M. DAUDA, ENGR. DR. A.U. USMAN, ENGR. DR. U.S. DAUDA,
ENGR. M. ABUBAKAR, ENGR. DR. E.A. AFOLABI, ENGR. DR. I.M. ABDULLAHI,
ENGR. DR. (MRS) I.H. MUSTAPHA, ENGR. A.S. AHMAD, ENGR. J.G. AMBAFI,
ENGR. T.A. FOLORUNSO, ENGR. U.U. BUHARI, ENGR. DR. OPE OSANAIYE,
ENGR. A. YUSUF



FEDERAL UNIVERSITY OF TECHNOLOGY, MINNA
 SCHOOL OF ELECTRICAL ENGINEERING AND TECHNOLOGY &
 SCHOOL OF INFRASTRUCTURE, PROCESS ENGINEERING AND TECHNOLOGY



DATE: 24TH - 26TH SEPTEMBER 2019

**THEME THE ROLE OF ENGINEERING AND
 TECHNOLOGY IN SUSTAINABLE DEVELOPMENT**

MEMBERS OF THE CONFERENCE ORGANISING COMMITTEE

Engr. Dr. S.M. Dauda	Chairman	Engr. Dr. U.S. Dauda	Member
Engr. Dr. A.U. Usman	Co-Chairman	Engr. Dr. M.D. Yahya	Member
Engr. Prof. R.A. Muriana	Member	Engr. Dr. B.A. Orhevba	Member
Engr. Dr. T.W.E. Adejumo	Member	Engr. Dr. Michael David	Secretary

TECHNICAL COMMITTEE

Engr. Dr. U.S. Dauda	Chairman
Engr. Dr. Eytayo Afolabi	Member
Engr. Dr. A.I. Mohammed	Member
Engr. Dr. (Mrs) H.I. Mustapha	Member
Engr. A.S. Ahmad	Member
Engr. J.G. Ambafi	Member
Engr. T.A. Folorunso	Member
Engr. Buhari U. Umar	Member
Engr. Dr. Ope Osanaiye	Member
Engr. A. Yusuf	Member
Engr. M. Abubakar	Secretary

LOGISTIC COMMITTEE

Engr. Prof. R.A. Muriana	Chairman
Engr. D.N. Kolo	Member
Engr. Essien Akpan	Member
Mr. Idris Akintunde	Member
Mr. Mohammed Shehu	Member
Engr. Dr. T.W.E. Adejumo	Secretary

FINANCE COMMITTEE

Engr. Dr. B.A. Orhevba	Chairman
Engr. Prof. O.A. Olugboji	Member
Engr. Dr. M.D. Yahya	Member
Engr. Dr. H.I. Mustapha	Member
Engr. Bello Abdulkadir	Member
Engr. Buhari Umar	Member
Engr. Dr. M. Alhassan	Secretary

WELFARE COMMITTEE

Engr. Dr. M.D. Yahya	Chairman
Engr. Prof. R.A. Muriana	Member
Engr. Dr. A.J. Otaru	Member
Engr. Dr. E.A. Afolabi	Member
Engr. A. Yusuf	Member
Engr. Dr. B.A. Orhevba	Secretary

ICT COMMITTEE

Engr. Dr. Bala A. Salihu	Chairman
Mr Emmanuel Abba	Member
Mr Alenoghena Benjamin	Member

P-344-349





CONTENTS

Content	Page
Cover Page	i
Table of Content	ii
Forward	ix
Acknowledgement	x
Statistical Optimization of Biodiesel Production from Jatropha Oil Using Calcined Snail Shell Catalyst <i>Afangide, U. N., Olutoye, M. A., & Aberuagba, F.</i>	1 – 5
Development of AgNPs-MWCNTs Adsorbent for Seawater Treatment <i>Mohammed, S. M., Muriana, R. A, Agboola, J. B, Abdulkareem, A. S., Kariim, I., & Yahya, M. D.</i>	6 – 14
The Role of Engineering and Technology and Sustainable Development Reducing Carbon Emission with Green and Sustainable Build Environment <i>Hashimu, L., Halilu, A. A., & Sani, I.</i>	15 – 23
Optimization and Kinetics Study of Biodiesel Synthesis from Beef Tallow Using Calcium Oxide from Limestone <i>Ogunjobi, T. O., Olutoye, M. A. & Aberuagba, F.</i>	24 – 33
Column Adsorption Studies of Textile Wastewater Using Iron Oxide Nanoparticles doped Zeolite A <i>Alaya-Ibrahim, S., Kovo, A.S., Abdulkareem, A.S., Adeniyi, O.D. & Yahya, M.D.</i>	34 – 43
A Comprehensive Review on Use of Poly Electrolyte Complex PEC as an Adsorbent for the Removal of Heavy Metals From Aqueous Solution. <i>Achanya, B. E. & M., Auta</i>	44 – 52
Computational Fluid Dynamics Simulation of FCC Regenerator of a Refinery <i>Usman, A. A., Onifade, K.R., Mohammed, I. A., & Garba, M.U.</i>	53 – 60
Assessment of Factors Affecting Stakeholder Management in Nigeria Construction Projects <i>Okosun, B. O., Idiake, J.E., Oyewobi, L.O., & Shittu, A.A.</i>	61 – 64
Effect of Partial Replacement of Fine Aggregate with Sawdust in Light Weight Concrete Production using Bida Natural Stone as Coarse Aggregate <i>Alhaji B., Abubakar M., Yusuf A., Oritola S. F, Mohammed S. & Kolo D. N.</i>	65 – 69
Quality Assessment of Locally Available Selected Cements in Nigeria <i>Muftau, O. S., Abdullahi, M., & Aguwa, J. I.</i>	70 – 76
Development of Mix Design Guide for Normal Weight Concrete using Locally Available Materials <i>Okoh S. O.; Abdullahi M.; & Alhaji, B.</i>	77 – 82
Comparative Evaluation of Strength of Compacted Lateritic Soil Improved with Microbial-Induced Calcite Precipitate <i>K. J. Osinubi, E.W. Gadzama, A. O. Eberemu, & T. S. Ijimdiya</i>	83 – 91
Effects of Urban Growth on Surface Temperature in Parts of Katsina State, Nigeria <i>Abdulsamad Isah & Abubakar A.S.</i>	92 – 98



Kinetic Modelling and Error Analysis of the Bioremediation of Used Motor Oil Contaminated Soil Using Palm Bunch Ash as Stimulant <i>Abdulyekeen, K. A., Aliyu, A., Abdulkarim, A. Y., Salis, A., & Abdulkarim, A. S.</i>	99 – 103
Quantitative Risk Analysis for Communication Satellite Payload <i>Babadoko, D. M., & Ikechukwu, A. D.</i>	104 – 113
Characterization and Grading of South Eastern Nigerian Grown <i>Mangifera Indica</i> Timber in Accordance with British Standard 5268 <i>Mbakwe C.C., Aguwa J.I., & Oritola S.F.</i>	114 – 120
Characterization of Palm Kernel Shell as Lightweight Aggregate in Concrete Production <i>Sunday I. O., Aguwa J.I. & Auta S.M.</i>	121 – 125
Integrated Geophysical Investigation of the Failed Portion of Minna-Zungeru Road, Minna Niger State <i>Osheku, G. A., Salako, K. A., & Adetona, A. A</i>	126 – 132
Partial Replacement of Fine Aggregate with Waste glass in Concrete made from Bida Natural Aggregate <i>Alhaji B., Kolo, D. N., Abubakar M., Yusuf A., Abdullahi, A. and Shehu, M.</i>	133 – 137
Assessment of the Compressive Strength of Concrete Produced with Fine Aggregate from Different Locations in Minna <i>Aminulaji, H. O., Abdullahi, A., Abdulrahman, H. S., Alhaji, B., Joseph, O. F., Aliyu, S. Y.</i>	138 – 143
Response Surface Optimisation of the Adsorption of Cu (II) from Aqueous Solution by Crab Shell Chitosan <i>Babatunde E. O., Akolo S. A., Ighalo J. O. & Kovo A. S.</i>	144 – 151
The Linear Transformation of a Block Hybrid Runge-Kutta type Method for Direct Integration of First and Second Order Initial Value Problem <i>Muhammad, R., Yahaya, Y.A., & Abdulkareem, A.S.</i>	152 -154
Groundwater Potential Mapping in Bosso Local Government Area, Niger State, Nigeria <i>Abubakar, U.B. & Muhammed, M.</i>	155 – 159
Optimization of Synthesis Parameters of Silica from Bentonite Clay Using Acid Leaching <i>Ogwuche, A. S., Auta, M., & Kovo, A. S.</i>	160 – 163
Chemical and Mineralogical Characterization of Locally Sourced Nigerian Clay <i>Sumanu, O. M., Dim, P.E. & Okafor, J. O.</i>	164 – 167
Production and Optimization of Bioethanol from Watermelon Rind using <i>Saccharomyces Cerevisiae</i> <i>Igbonekwu, C. A., Afolabi, E. A., Nwachukwu, F.O.</i>	168 – 173
Use of Carbide Waste as a Mineral Filler in Hot Mix Asphalt <i>Murana, A.A. & Musa, Y.</i>	174 – 182
Review of Bio Oil Upgrading from Biomass Pyrolysis <i>Abdullahi, M. A, Garba, M. U, Eterigho E. J, & Alhassan, M.</i>	183 – 192



3rd International Engineering Conference (IEC 2019)
Federal University of Technology, Minna, Nigeria



Optimization study of Deacetylation Process in the Synthesis of Chitosan from Red Shrimp Using Response Surface Method <i>Atanda, A. S, Jimoh, A. & Ibrahim, A.A.</i>	193 – 204
Optimisation Study on the removal Pb(II), Cd(II) and Ni(II) from Pharmaceutical Wastewater using Carbonized African Giant Snail Shell (<i>Archachatina marginata</i>) as an Adsorbent. <i>Olanipekun, O., Aboje, A. A, Auta, M.</i>	205 – 215
Ground Electromagnetic Prospecting for Potential Ore Mineralisation Zones in Tsohon- Gurusu Area of Minna, North Central Nigeria <i>Ogale, O. D, Rafiu, A. A., Alhassan, D. U., Salako K. A., Adetona A. A. & Unuevho C.</i>	216 – 222
Magnetic and Geoelectrical Prospecting for Gold Mineralisation Within Tsohon-Gurusu Area, Part of Sheet 164 Minna, North-Central Nigeria <i>Omugbe, L. E, Salako, K. A, Unuevho, C.I, Rafiu, A. A, Alhassan, D. U, Ejepu, J. S, & Adetona, A. A.</i>	223 -228
Road Stabilization Using Cold Bitumen for Low Traffic Road <i>Kolo S. S., Jimoh, Y. A., Alhaji, M.M, Olayemi, J. & Shehu, M.</i>	229 – 233
Sawdust Ash Stabilization of Weak Lateritic Soil <i>Kolo S. S., Jimoh Y. A., Yusuf I. T, Adeleke O. O., Balarebe, F. & M. Shehu</i>	234 – 238
Radio Refractive Index and Refractive Index Gradients Variation in a Tropical Environment <i>I.M. Tukur, K.C. Igwe & J.O. Eichie</i>	239 - 243
Vocational and Technology Education: A Viable Entrepreneurship Tool for Rapid Economic Growth <i>Kareem, W.B., Abubakar, H.O. (Mrs.), Onuh, J., Abdulrahaman, T.S., Abdullahi S.M.</i>	244 – 249
A 2-Step Hybrid Block Backward Differentiation Formula for the Approximation of Initial Value Problems of Ordinary Differential Equations <i>Akintububo, Ben.G & Umaru Mohammed</i>	250 – 254
Significant Delay Factors Affecting Completion Time of Public Sector Construction Projects in Niger State <i>Mamman, J. E., Abdullahi, A. H., Isah, L. M.</i>	255 – 260
Communication Frequency and Effectiveness on Construction Sites in Abuja, Nigeria <i>Mamman, J.E., Abdullahi, A.H. & Isah, M.L.</i>	261 – 269
Contribution of Quality Management Practices towards Building Collapse in Nigeria <i>Yunusa, H., Makinde, J. K., & Oke, A. A.</i>	270 – 277
Assessment of Ethical Practices at Different Stages of Public Housing Delivery in Nigeria <i>Oluwadare, D. O. & Idiake, J. E.</i>	278 – 285
Participation of Female Quantity Surveyors in the Nigerian Construction Industry <i>Nnamoko, C. E</i>	286 – 292
Performance Evaluation of WUPA Wastewater Treatment Plant Idu-Industrial Area, Abuja <i>Saidu, M., Adesiji, A. R., Asogwa, E.O., Jiya, A.M. & Haruna, S.I.</i>	293 – 296
Evaluation of Strength Characteristics of Compacted Deltaic <i>Chikoko</i> Clay Stabilized with Rice Husk Ash <i>T.W.E. Adejumo & B. B. Olanipekun</i>	297 – 303



3rd International Engineering Conference (IEC 2019)
Federal University of Technology, Minna, Nigeria



Empirical Impact Evaluation of Sales Promotional Mix on Sachet -Water Product Distribution on Enterprise Performance: A Survey of Selected Sachet- Water Outfits in Niger State <i>Adima Julius Osaremen</i>	304 - 312
Assessing the Level of Readiness to Adopt Building Information Modelling (BIM) Amongst Built Environment Professionals In Selected Northern Nigerian States <i>Abubakar, I. T. & Oyewobi, L. O.</i>	313 - 323
Design and Implementation of an SMS-based dynamic matrix LED Display Board <i>Habibu, H., Chukwu, E. C., Latifa, Y., Haris, M. Y. & Okosun, O. E.</i>	324 - 329
An Improved User Pairing, Subchanneling, and Power Allocation Algorithm For 5G Noma System. <i>Muhammad Z.Z., Tekanyi A.M.S., Abubilal K.A., Usman A. D., Abdulkareem H. A. & Kassim A. Y.</i>	330 - 337
Automation of Agricultural Machinery Operation Systems; An Imperative for Sustainable Development <i>Bala Ibrahim</i>	338 - 343
Electricity Generation using Locust Bean Waste and Coal in a Molten Carbonate Direct Carbon Fuel Cell <i>Yakubu E., Adeniyi, O.D., Alhassan M., Adeniyi, M.I., Uthman H., and Usman A.A.</i>	344 - 349 ✓
Design of a Programmable Solid State Circuit Breaker <i>Ajagun, A. S., Abubakar, I. N., Yusuf, L. & Udochukwu P. C.</i>	350 - 354
Design of an Arduino Based RFID Line Switching Using Solid State Relay with Individual Phase Selection <i>Ajagun, A. S., Yusuf, L., Abubakar, I. N. & Yusuff, S. D.</i>	355 - 361
Development of an Improved Adaptive Hybrid Technique to Mitigate Cross-Tier Interference in a Femto-Macro Heterogeneous Network <i>Kassim, A. Y., Tekanyi, A. M. S., Sani, S. M., Usman, A. D., Abdulkareem, H. A. & Muhammad, Z. Z.</i>	362 - 370
The Level of Awareness of Electrical Safety Among Energy Users in Sokoto State <i>Umar, A., Abubakar, I. N., Yusuf, H. M. & Okosun, O. E.</i>	371 - 376
Phytoremediation of Soil Contaminated with Brewery and Beverage Effluents using <i>Cynodon dactylon</i> <i>Mustapha, H., Ehichoya, C. S & Musa, J. J</i>	377 - 384
Application of Dreyfus Model of Skills Acquisition in Curbing Youth Unemployment Among the Motor vehicle Mechanic Students' in Nigeria <i>Aliyu Mustapha, Abdulkadir Mohammed, Abubakar Mohammed Idris & Benjamin Oke</i>	385 - 390
A Numerical Analysis of Convective Heat Transfer Rate from A Wavy Fin Projecting Horizontally From A Rectangular Base <i>Okon, J. O.</i>	391 - 396
Towards A Hybrid MQTT-COAP Protocol for Data Communications In Wireless Sensor Networks <i>Nwankwo, E. I, Onwuka, E. N & Michael, D.</i>	397 - 403
Toward a Hybrid Technique for Friends Recommendation System in Social Tagging <i>Usman Bukar Usman</i>	404 - 410
Towards A Model for Aspect Based Sentiment Analysis of Online Product Review <i>Abdulganiyu, O. H. & Kabiru, U.</i>	411 - 418



3rd International Engineering Conference (IEC 2019)
Federal University of Technology, Minna, Nigeria



Parametric Oscillations in Electric Oscillatory System <i>Enesi A.Y., Ejiogu. E. C.</i>	419 – 423
Fenestration Effect on the Adequacy of Classroom UDD <i>Azodo, A. P., Onwubalili, C. & Mezue T. C.</i>	424 – 431
Prediction of Upper Limb Functional Ability in Post-Traumatic Patients Using Machine Learning. <i>Zaiyanu Nuhu, Yeong Che Fai, Elijah David Kure, Ibrahim B. Shehu, Mahmoud Mustapha, Rabiul Al-Tanko & Khor Kang Xiang</i>	432– 441
Arduino Based Automatic Irrigation System <i>Ibrahim Bashir Shehu, Zayyan Nuhu & Rbiu Altanko Ummaisha</i>	442 – 448
Production and Application Potentials of Sugarcane Bagasse Reinforced Polymer Composites for Acoustic Control <i>Sanda Askira Damboama</i>	449 – 456
Electromagnetic Field analysis of a Single-phase Induction Motor based on Finite Element Method <i>Omokhaje J. Tola, Edwin A. Umoh, Enesi A. Yahaya, Chika Idoko, Ayo Imoru</i>	457 – 463
Parameter Investigation and Analysis for Elite Opposition Bacterial Foraging Optimization Algorithm <i>Maliki, D, Muazu, M.B, Kolo, J.G, & Olaniyi, O.M.</i>	464 – 471
Multi-Access Edge Computing Deployments for 5G Networks <i>Mosudi, I. O, Abolarinwa, J, & Zubair, S.</i>	472– 479
Suitable Propagation Models for 2.4 GHz Wireless Networks: Case Study of Gidan Kwano Campus, FUT MINNA. <i>Ogunjide, S. B., Usman, A. U., & Henry, O. O.</i>	480 – 488
A Survey on Mobile Edge Computing: Focus on MEC Deployment, Site Selection Problems and Application Scenarios. <i>Atolagbe, M. I, Osanaiye, O.</i>	489 – 496
Influence of Processing Techniques and Packaging Materials on Anti- Nutritional Properties of Soybean Flour <i>Orhevba, B. A., Anehi, A. & Obasa, P. A.</i>	497 – 503
Prospects and Challenges of Off-Grid Power Generation For Rural Communities in Nigeria – Theoretical Perspective <i>Dangana Audu & Ikechuku A. Diugwu</i>	504 – 509
Spectrum Occupancy Measurement in the VHF Band- Results and Evaluation in the Context of Cognitive Radio <i>Ajiboye, J.A, Adegboye, B.A, Aibinu, A.M, Kolo, J.G</i>	510 – 514
Modelling and Simulation of Adaptive Fuzzy-PID Controller for Speed Control of DC Motor <i>Timothy Onyechokwa, Adegboye B. A. & A.S. Mohammed</i>	515 – 520
Implementation of Remote Patient Monitoring System using GSM/GPS Technology <i>Umar Abdullahi, Salihu Aliyu Oladimeji, Waheed Moses Audu, Muslim Saidu, Manasseh Wayo</i>	521 – 527
Comparism of Adaptive Neuro Fuzzy Inference System and Support Vector Machine for the Prediction of Immunotherapy Warts Disease <i>Abisoye,B.O, Abisoye, O.A, Kehinde Lawal, Ogunwede E mmanuel</i>	528 – 536



3rd International Engineering Conference (IEC 2019)
Federal University of Technology, Minna, Nigeria



- Prediction of Epileptic Seizure using Support Vector Machine and Genetic Algorithm
Abisoye, O. A, Abisoye, B.O, Ekundayo Ayobami, & Ogunwede Emmanuel 537 – 542
- The Prediction of Cervical Cancer Occurrence Using Genetic Algorithm and Support Vector Machine
Abisoye, O. A, Abisoye, B.O, Ekundayo Ayobami & Kehinde Lawal 543 – 549
- Performance Evaluation of Ant Lion Optimization and Particle Swarm Optimization for Uncapacitated Facility Location Problem (UFLP)
Shehu Hussaina & Morufu Olalere 550 – 558
- Potential, Barriers and Prospects of Biogas Production in North- Central Nigeria
Ahonle Jennifer Eferi & Adeoye Peter Aderemi 559 – 564
- Design Analysis of Manually Operated Machine for On-Row Transplanting of Paddy Rice
Ibrahim, T. M., Ndagi, A., Katun. I. M. & Anurika, U. A. 565 – 572
- Investigation of Vulnerability of Oil and Gas Critical Infrastructures and Developing a Tracking Algorithm to track Malicious Attacks on the Streams
Isah, A.O., Alhassan, J.K, Idris, I., Adebayo, O.S., Onuja, A. M. 573 – 580
- Optimization of Process Variables in Bio-Waste Based Activated Carbon Preparation Using Response Surface Methodology.
Onuoha, D. C., Egbe, E. A. P., Abdulrahman, A. S. & Abdulkareem, A. S. 581 – 589
- Development of a Petroleum Pipeline Monitoring System for Detection, Location and Characterization of Damages in Pipes
Aba, E. N, Olugboji, O. A, Nasir, A, Oyewole, A, & Olutoye, M. A. 590 – 598
- Analysis of Maximum Power Point Tracking (MPPT) Techniques under Different Atmospheric Conditions: Technical Review
Dania, D. E, Tsado, J, Nwohu, M, & Olatomiwa, L. 599 – 608
- Development OF Briquette-Powered Water Distiller
Muhammadu M. M, Unugbai, J. A, Bako M. D., Abubakar J. A. 609 – 614
- Impact of SVC and DG Coordination on Voltage Constrained Available Transfer Capability (VSATC)
Sadiq A. A, Adamu S. S, Abubakar I. N. & Yusuf L. 615 – 619
- Construction of a Solar Powered Battery Forge
Adimula, M. G., Abubakre, O. K., Muriana, R. A. 620 – 625
- Financial Assessment of the Flood Risk Preparedness of Some Selected States in Nigeria
Idachaba, A, Makinde, J & Oke, A. 626 – 631
- Development of Spin Dryer Machine
Alhassan T. Yahaya & Muhammadu M. M. 632 – 641
- Assessment of Quality Control Management in Sachet Water Packaging
T.J Bolaji and A.A. Abdullahi 642 – 648
- Survey of Tractor Usage and Parts Breakdown in Niger State, Nigeria
Dauda, S. M., Abdulmalik M.K., Isyaku M. I., Francis A.A. & Ahmad D. 649 – 654



3rd International Engineering Conference (IEC 2019)
Federal University of Technology, Minna, Nigeria



Development of an Inspection Methodology for Peugeot 508 <i>Bala Dauda & James Oseni Abu</i>	655 – 660
Design and Fabrication of Banana Fiber Extractor machine and Performance Evaluation for the Reinforcement of Composites <i>Odii Kinsley Chika & Ademoh N.A.</i>	661 – 667
Optimisation of Biodiesel Production from Sandbox (<i>Hura Crepitans</i>) Seed Oil <i>Usman M., Adebayo S., Aliyu M. & Dauda, S. M.</i>	668 – 676
A Multi-source Broadband Radio Frequency Energy Harvester with Cascaded Diversity Combiner for Mobile Devices <i>Ihemelandu, J. C., Onwuka, E. N., David, M., Zubair, S. & Ojerinde O. A.</i>	677 – 683
Artificial Neural Network (ANN), a Formidable Tool for Atmospheric Forecasting. A Review <i>Usman M.N., Aku I.G. & Oyedum O.D.</i>	684 – 692
Development of a Model for Generation of Examination Timetable Using Genetic Algorithm <i>Ahmed A., Umar B. U., Abdullahi I. M., Maliki. D., Anda I. & Kamaldeen J. A.</i>	693 – 700
Smart Protection of Vehicle using Multifactor Authentication (MFA) Technique <i>S. Aliyu , Umar Abdullahi, Majeedat Pomam, Mustapha Hafiz, Adeiza Sanusi, & Sodiq Akanmu</i>	701 – 710
Development of Production Frame Work to Mitigate Corrosion in Under Groung Tanks <i>Emenuwe Vincent & Aliyu Abdullahi</i>	711 – 715
Physical Property Modification of Vegetable Bio-Cutting Oil Using Garlic as EP Additive <i>Sanni John</i>	716 - 719
Soil Moisture and Nutrients Control: An Automated Design Proposal <i>Mustapha Mohammed, Elijah David Kure & Yusuf Mubarak</i>	720– 727



FORWARD

The School of Engineering and Engineering Technology, Federal University of Technology, Minna, organized the 1st and 2nd International Engineering Conference in 2015 and 2017 respectively. With the emergence of the new School of Electrical Engineering and Technology and the School of Infrastructure, Process Engineering and Technology, the two schools came together to organize this 3rd International Engineering Conference (IEC 2019) with the theme: "The Role of Engineering and Technology in Sustainable Development" considering the remarkable attendance and successes recorded at the previous conferences. The conference is aimed at offering opportunities for researchers, engineers, captains of industries, scientists, academics, security personnel and others who are interested in sustainable solutions to socio-economic challenges in developing countries; to participate and brainstorm on ideas and come out with a communiqué, that will give the way forward. In this regard, the following sub-themes were carefully selected to guide the authors' submissions to come up with this communiqué.

1. Engineering Entrepreneurship for Rapid Economic Growth.
2. Regulation, Standardization and Quality Assurance in Engineering Education and Practice for Sustainable Development.
3. Solutions to the Challenges in Emerging Renewable Energy Technologies for Sustainable Development.
4. Electrical Power System and Electronic as a Panacea for Rapid Sustainable Development
5. Promoting Green Engineering in Information and Communication Technology
6. Reducing Carbon Emission with Green and Sustainable Built Environment
7. Artificial Intelligence and Robotics as a Panacea for Rapid Sustainable Development in Biomedical Engineering
8. Petrochemicals, Petroleum Refining and Biochemical Technology for Sustainable Economic Development.
9. Advances and Emerging Applications in Embedded Computing.
10. Traditional and Additive Manufacturing for Sustainable Industrial Development.
11. Emerging and Smart Materials for Sustainable Development.
12. Big Data Analytics and Opportunity for Development.
13. Building Information Modeling (BIM) for Sustainable Development in Engineering Infrastructure and Highway Engineering.
14. Autonomous Systems for Agricultural and Bioresources Technology.

The conference editorial and Technical Board have members from the United Kingdom, Saudi Arabia, South Africa, Malaysia, Australia and Nigeria. The conference received submissions from 4 countries namely: Malaysia, South Africa, the Gambia and Nigeria. It is with great joy to mention that 123 papers were received in total, with 0.9 acceptable rate as a result of the high quality of articles received. Each of the paper was reviewed by two personalities who have in-depth knowledge of the subject discussed on the paper. At the end of the review process, the accepted papers were recommended for presentation and publication in the conference proceedings. The conference proceedings will be indexed in Scopus.

On behalf of the conference organizing committee, we would like to seize this opportunity to thank you all for participating in the conference. To our dedicated reviewers, we sincerely appreciate you for finding time to do a thorough review. Thank you all and we hope to see you in the 4th International Engineering Conference (IEC 2021).

Engr. Dr. S. M. Dauda
Chairman, Conference Organizing Committee



3rd International Engineering Conference (IEC 2019)
Federal University of Technology, Minna, Nigeria



ACKNOWLEDGEMENT

The Chairman and members of the Conference Organizing Committee (COC) of the 3rd International Engineering Conference (IEC 2019) wish to express our gratitude to the Vice Chancellor and the management of the Federal University of Technology, Minna, the Deans and all staff of the School of Electrical Engineering and Technology (SEET) and the School of Infrastructure, Process Engineering and Technology (SIPET) for the support towards the successful hosting of this conference. We also thank the entire staff of the university who contributed in one way or the other. We are sincerely grateful to you all.



Electricity Generation using Locust Bean Waste and Coal in a Molten Carbonate Direct Carbon Fuel Cell

Yakubu E., *Adeniyi, O.D., Alhassan M., Adeniyi, M.I., Uthman H., and Usman A.A.
Chemical Engineering Department, Federal University of Technology, Minna, Nigeria

*Corresponding author Email: o.adeniyi@futminna.edu.ng.

ABSTRACT

The quest for a sustainable source of energy has made researchers turn towards direct carbon fuel cell (DCFC). It is a device that directly converts the chemical energy of a biomass or fossil fuel into electrical energy. The combination of the coal and a renewable biomass Locust bean waste (LBW)(*Parkia Biglobosa*) can enhance the electrochemical performance of the DCFC. Pyrolysis pre-treatment process was initially carried out at heating rate of 10°C/min. This was done for each of the sample and their combination. The pyrolyzed biomass for both of them was then used to determine the electrochemical performance of DCFC using molten carbonate salt as electrolyte and using five different resistor loads (1Ω, 2Ω, 3Ω, 4Ω & 5Ω). Performance of coal in the DCFC was observed to be better than *Parkia Biglobosa*. However upon combination of both solid fuels, an enhanced performance was observed. At a temperature of 800°C and resistance of 1Ω, the combined fuel showed an open circuit voltage of 1.16 V, current density of 43.2 mA/cm², power density of 2.91 mW/cm² with 73% efficiency. The SEM result of the carbon fuels was obtained using Nova NanoSEM 200 FEI, Netherlands. The SEM results of the combined fuel were observed to be better. The phase composition of each fuel was determined using Siemens D500 XRD System. The highest peak for the LBW, Coal and the combined fuel was at an angle of 25.988°, 26.24°, 26.637° respectively and the corresponding inter-planar spacing of 3.42Å for LBW fuel and 3.34Å for coal and the other fuel.

Keywords: Biomass, carbon fuel, direct fuel cell, locust bean waste, coal, Pyrolysis.

1 INTRODUCTION

Energy is very important to perform the day to day activities of mankind and different alternative energy sources have been the research focus globally. The alternatives from non-renewable forms of energy have been the subject of scientific researches with the aim of addressing the emission challenges of harmful gases released to the atmosphere thus reducing the greenhouse effect of climate change and global warming. For developing country like Nigeria, the electrical energy supply is grossly inadequate for the growing population. Thus there is a need to look inward for more sustainable and renewable energy sources from biomass and its blend with other energy sources. Most developing economics will adopt renewable energy, since fossil fuels are limited in supply and will eventually run out of supply. The combination of biomass and fossil fuel (like coal) will be a good blend for sustainable electrical energy generation. These when properly developed will alleviate the effects of climate change and global warming using the direct carbon fuel cell (DCFC) technology (Dudek *et al.*, 2018; Adeniyi *et al.*, 2014; Adeniyi & Ewan, 2012; Jain *et al.*, 2009,2007).

A sustainable modern industrial economy can only be achieved through electrical power generation. The direct

carbon fuel cell (DCFC) technology offer a viable technique that can practically produce electricity that is safe, relatively simple, cost effective, remarkably efficient, reliable, environment friendly and a more effective way to improve conventional power generation. Coal is a fossil fuel which is abundant in nature and is responsible for more than 30% of the world primary energy generation. It has been estimated that this forecast will slightly increase or remain steady until 2030 showing that coal will still be relevant for the future. The conventional method of power generation from coal has contributed to global warming and climate change and thus the DCFC technology offer an efficient and environmentally benign way of utilizing the energy stored in coal (Kacprzak *et al.*, 2019; Cooper & Berner, 2005; Munnings *et al.*, 2014; Arenillas *et al.*, 2013; Li *et al.*, 2010).

A direct carbon fuel cell is an electrochemical device that efficiently converts the chemical energy of a carbon rich fuel directly to electrical energy without burning the fuel. The DCFC gives off a pure stream of carbon dioxide that can be captured without incurring additional costs of collection and can be used in other industrial requirements such as in the oil and gas industry. In the DCFC technology, solid carbonaceous fuels are used and directly oxidized at the anode surface. Different carbon fuels, such as coal, biomass, or blends of these are exposed to high temperature conversion, the fuel is electro-oxidized to CO₂ at anode compartment creating electricity. A conversion efficiency rate of 80% is achievable depending

on the type of carbon fuel applied; it could reduce carbon emissions by 50% and off-gas volume by 10 times when compared to conventional coal-fired power stations of about 35% efficiency. This increased efficiency results in a beneficial pay off for DCFC development. Fuel produced from waste offers many benefits (Giddey *et al.*, 2012; Jia *et al.*, 2010; Declaux *et al.*, 2010; Cooper & Cherepy, 2008; Cao *et al.*, 2007; Dicks, 2006; Cherepy *et al.*, 2005; Zecevic *et al.*, 2004; Larminie & Dicks, 2003; Hoogers, 2003).

The direct carbon fuel cell offers a higher efficiency and lower emissions in the production of electricity; it is portable and easy to construct. The direct carbon fuel cell use of biomass materials as its fuel source makes it economically viable for waste management and reduction of greenhouse effect. Nigeria as a country is challenged with the lack of adequate electricity to power its economy, which is a major factor affecting the development of most third world countries like: Nigeria, Burkina Faso, Burundi, Niger, Tanzania and others. This paper investigate the use of biomass (locust bean waste (LBW)), coal and the blend to generate electricity using the DCFC technology.

2 METHODOLOGY

Two types of samples were selected for investigation; Locust bean waste (LBW) and Bituminous coal (Figures 1 and 2). Locust bean waste was obtained from Niger State and carefully sorted, sun dried and then reduced in size. This sample was subjected to pyrolysis at 500°C at Badeggi Research Centre Bida, Niger State and the char obtained was ground to fine particles. The same process was carried out for the coal sample obtained from Kogi state and the combination of the two sample simultaneously. A portion of the char was appropriated for proximate and ultimate analysis (Ash content, Volatile matter, Fixed carbon, Moisture content). The proximate analysis was carried out using an ELTRA CHS-580 Analyser (Netherlands). The phase compositions of the carbon samples thus obtained were evaluated using X-ray diffraction analysis (XRD, Netherland) and the Scanning Electron Microscopy (Nova NanoSEM 200 FEI, Netherlands). An EDS system (EDAX, Netherlands) was also used to characterise the morphology and chemical composition of carbon particles used as solid fuel.

The fuel cell experimental set-up was developed for the electrochemical operation of the molten carbonate direct carbon fuel cell (MCDCFC). The electrolyte consisted of sodium carbonate and potassium carbonate, both saturated to a wire mesh to hold it together and subjected to different temperature of 500°C to 800°C. 38 mol% of Na₂CO₃ and 62 mol% of K₂CO₃ were measured, mixed and transferred to a stainless steel plate. The mixture was subjected to high temperature using the

blacksmith fire and was stirred continuously to obtain homogeneous mixture.



Figure 1: Locust bean waste (LBW)

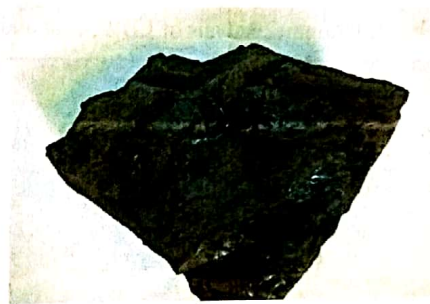


Figure 2: Bituminous coal

At a temperature of 1159°C - 1310°C the carbonate salt mixture changed to molten state, the mesh wire was saturated in the molten mixture so that upon cooling, the molten carbonate stuck to the mesh (Adeniyi *et al.*, 2014; Cooper & Berner, 2005). The carbon fuel is mixed with carbonate salts (sodium and potassium carbonate) as 15 wt.% of carbon fuel, 46.6 wt.% of Na₂CO₃ and 53.4 wt.% of K₂CO₃. The sodium carbonate and potassium carbonate were mixed with individual weight of 13.98 g and 16.02 g, and mixed with 45 g of the carbon fuel (Adeniyi and Ewan, 2012; Cooper and Cherepy, 2008).

3 RESULTS AND DISCUSSION

Tables 1 and 2 give the type of analysis that was carried out on the locust bean waste (LBW), coal and their blend after pyrolysis. The proximate and ultimate analysis was conducted at the National Cereals Research Institute, Badeggi in Niger state where the moisture content, volatile matter, fixed carbon and ash content and as well as the carbon (C), nitrogen (N), hydrogen (H), sulphur (S), oxygen (O) content and the calorific values were obtained.

Table 1: Proximate analysis of LBW, coal and blend

Sample	Moisture Content	Ash Content	Volatile Matter	Fixed Carbon
LBW	3.0	8.0	67.0	22.0
Coal	2.4	6.9	68.8	21.9
LBW and Coal	1.82	8.0	64.18	26.0

Table 2: Ultimate analysis of LBW, coal and blend

Sample	C wt.%	H wt.%	O wt.%	N wt.%	S wt.%	Calorific Value MJ/Kg
LBW	3.92	4.8	36.4	0.4	0.2	21.6
Coal	6.43	8.2	27.24	0.08	0.18	21.9
LBW and Coal	5.84	6.8	33.8	0.8	0.2	21.4

3.1 LBW CARBON FUEL

The carbon fuel in the molten carbonate direct carbon fuel cell (MCDCFC) performance at temperatures of 500°C, 600°C, 700°C and 800°C are shown in Figures 3 and 4. These include the SEM and XRD pattern for the locust bean waste fuel pyrolyzed at 500°C. Figure 3 shows the XRD of locust bean waste carbon sample used in the DCFC. The highest peak is at an angle of 25.988°(2θ-axis), with corresponding d-spacing of 3.42Å and a relative intensity of 100%. The peak value suggests a disordered form of carbon and this is a favourable criteria for application in the direct carbon fuel cell (Dudek *et al.*, 2018; Adeniyi *et al.*, 2014; Cooper & Berner, 2005). Figure 4 shows the SEM micrograph for the biochar from the LBW. This shows the size distribution and structure of the pyrolyzed carbon sample. This contains a combination of large particles with smaller ones which shows the interaction of the carbon particles.

Figure 5 presents the MCDCFC performance of the carbon sample used in the direct carbon fuel cell. The voltage increased with increase in the temperature, reaches a maximum, and finally falls at higher current densities.

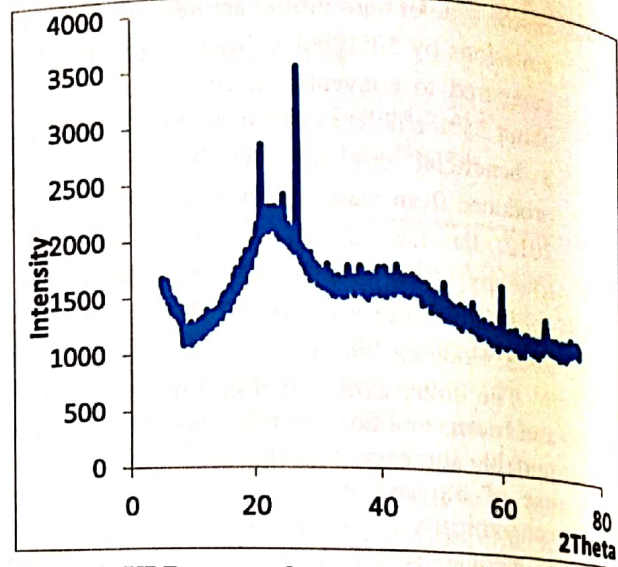


Figure 3: XRD pattern for pyrolyzed LBW at 500°C

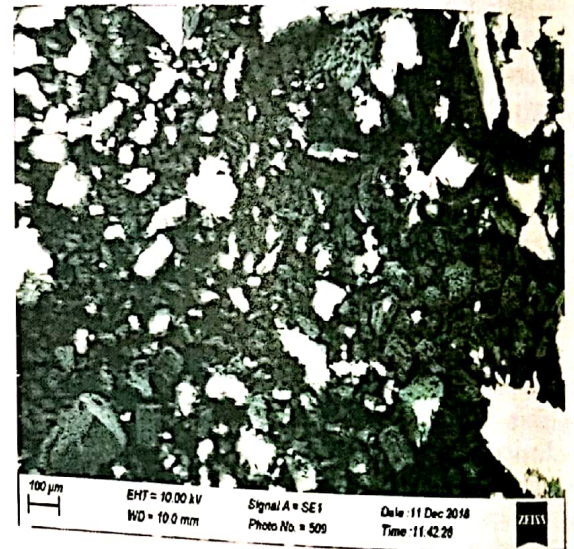


Figure 4: SEM of locust bean waste fuel

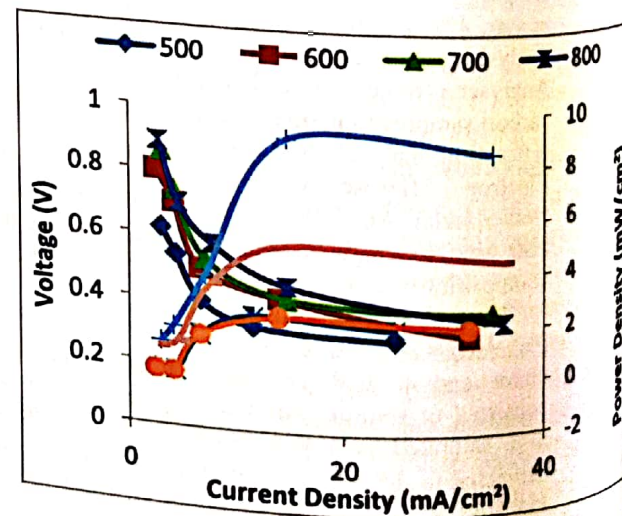


Figure 5: DCFC performance for Locust bean waste fuel

The current density and power density have high values at 800°C. At this temperature, the carbon fuel is consumed at the anode side of the fuel cell and a porous surface created on the electrolyte leading to a sharp rise in the current density. It was also observed from Figure 4 that the carbon particle have finer grain size and more homogeneous microstructure, and the surface morphology enhances the current density. (Munnings *et al.*, 2014; Jia *et al.*, 2010; Jain *et al.*, 2009).

3.2 COAL CARBON FUEL

There was a slight difference in the DCFC performance of carbon fuel from coal as compared with that in Figures 3 to 5 at temperature 500-800°C. Figures 6 to 8 shows that the carbon fuel from coal gave a better performance than what was obtained from LBW carbon fuel. Figure 6 displays the X-ray diffraction pattern of the coal carbon fuel pyrolyzed at 500°C. The result obtained showed the degree of disordered graphite content and the sharp peaks indicates the presence of silica, oxygen and other impurities identified by the STOE Databank spectra. It was also observed that the presence of non-crystallites increases the surface area and thus produced improved current density. The peak at 26.24° corresponds to quartz (crystalline SiO₂). The inter-planar spacing of the carbon particle is 3.34Å, which indicates the presence of larger reactive sites units. These are indications of the suitability of the coal carbon fuel in the application of DCFC (Arenillas *et al.*, 2018; Kacprzak *et al.*, 2017).

Figure 7 represents the SEM micrograph of the coal carbon fuel sample. The fuel showed larger particle sizes, irregular shapes and fine grain sized particles. It was observed that the higher the current density the finer the surface morphology of the sample. However it could be deduced that the carbon fuel from coal is a better fuel when used in the direct carbon fuel cell because it possess higher calorific value. From Figure 8, it was noticed that the voltage increased with corresponding increase in the temperature, up to a point where there was a slight drop in the voltage reading. The coal carbon fuels also display higher current density at higher temperature (Li *et al.*, 2010; Jain *et al.*, 2009).

3.3 COMBINED CARBON FUEL

Figures 9 to 11 represents the electrochemical performance of the combined carbon fuels used in the fuel cell. The X-ray diffraction pattern for the combined carbon particle is represented in Figure 9. The presence of non-crystallites increases the surface area and thus producing improved current density.

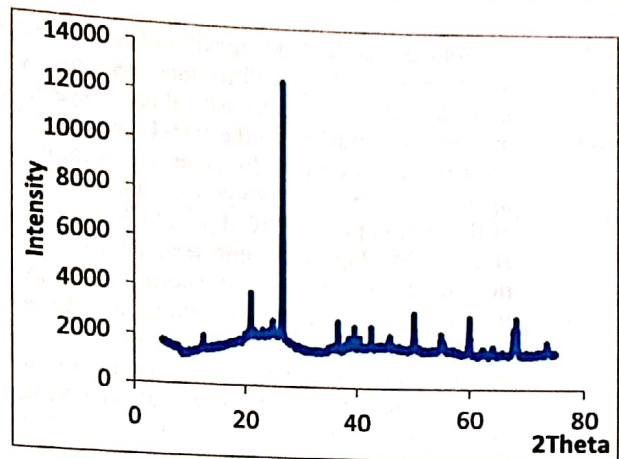


Figure 6: XRD pattern for coal pyrolyzed at 500°C

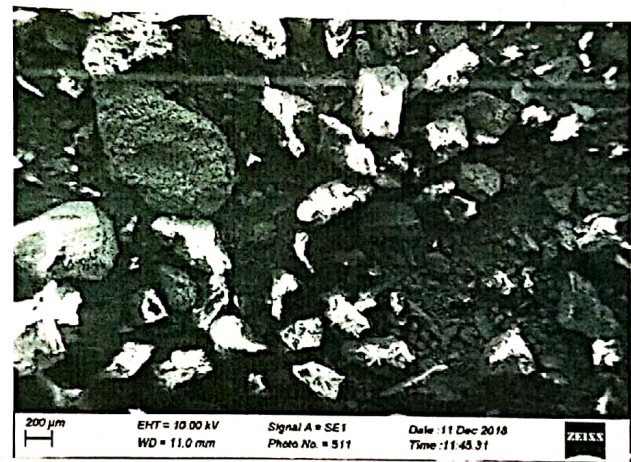


Figure 7: SEM pattern for coal carbon fuel

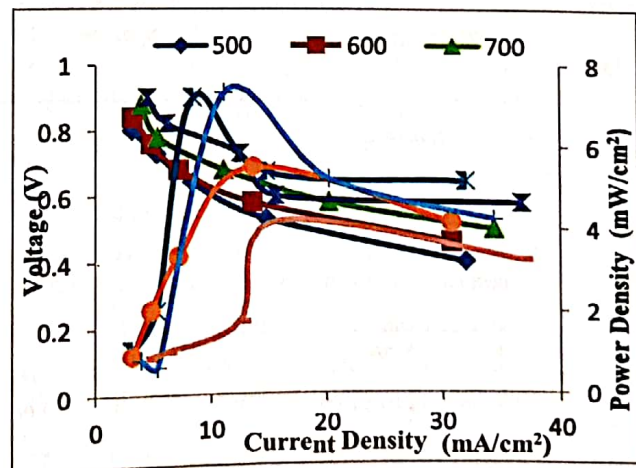


Figure 8: DCFC performance for coal fuel

The highest peak is at an angle 26.637° with corresponding d-spacing of 3.34Å on a relative intensity of 100%, which is the same with what was obtained for

the coal carbon fuel. The result obtained shows the degree of disordered graphite content and the sharp peaks indicates the presence of silica, oxygen and other impurities identified by the STOE Databank spectra. The disordered carbon particle is an important property in the operation of DCFC. Pyrolysis is vital to the disorderliness of the carbon particles (Cooper & Cherepy, 2008; Zecevic *et al.*, 2004). Figure 10 represents the SEM micrograph of the combined fuel and it shows larger particle sizes, irregular shapes and fine grain particles with slightly homogenous microstructure. The finer the particle surface morphology of the sample the higher it influences on the value of the current density. Figure 11 reveals the overall electrochemical performance of the combined carbon fuel and it interprets that a higher current density of 43.2 mA/cm² was obtained at 800°C alongside the power density. 8.10 mW/cm² was also obtained as the peak power density value. The performance of the DCFC is enhanced when coal is blended with LBW, which could lead to a lower CO₂ emission from the operation. This itself will have significant effect on the reduction of climate change and global warming when compared to the conventional burning of coal.

Figures 5, 8 and 11 shows the characteristics of power, current and voltage curves for a molten carbonate direct carbon fuel cell (MDCFC). Some electrochemical parameters are presented in Table 3. The combined fuel (LBW and Coal) has the highest power efficiency of 73% at 800°C while LBW (locust bean waste) had the lowest at 54°C at same operating temperature. The open circuit voltage, peak power density, current density at 73% voltage efficiency proved to be the best result amidst the carbon fuel samples.

Table 3: MDCFC performance at 800°C

MDCFC Parameter	LBW	Coal	Combined Fuel (LBW & Coal)
Open circuit voltage (V)	0.90	1.012	1.16
Maximum power density (mW/cm ²)	9.05	7.32	8.10
Maximum current density (mA/cm ²)	35.6	36.8	43.2
Voltage at peak power (V)	0.89	0.90	1.08
Efficiency at peak power (%)	54	61	73

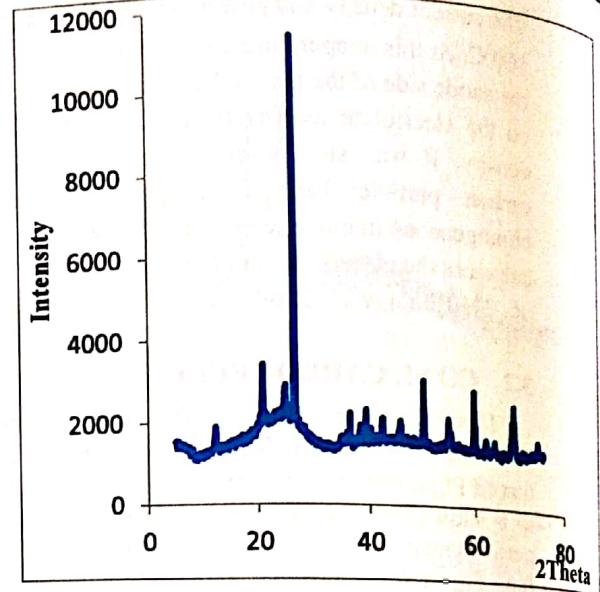


Figure 9: XRD for combined fuel (LBW and Coal)

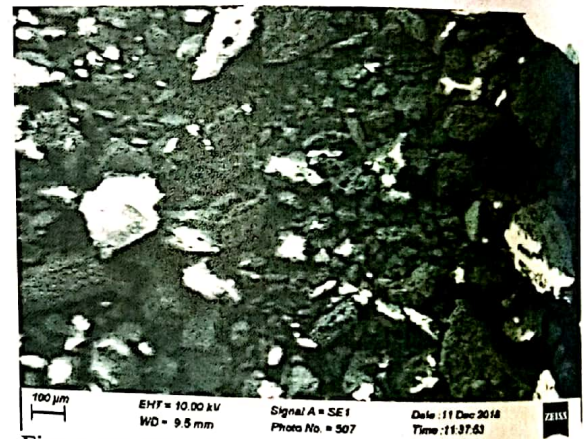


Figure 10: SEM for combined fuel (LBW and Coal)

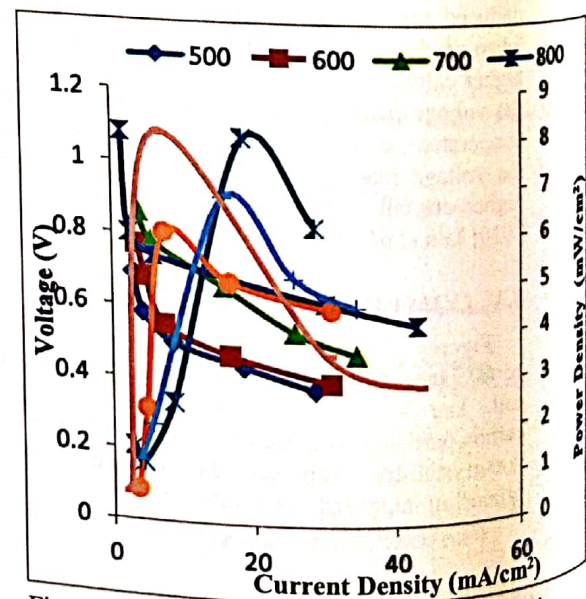


Figure 11: DCFC performance for combined fuel.

4 CONCLUSION

The investigation of the molten carbonate direct fuel cell showing the electrochemical performance of locust bean waste, coal and the combined fuel were carried out. The performance for the combined fuel was higher than that obtained from coal and locust bean waste. The open circuit voltage of the combined fuel is 1.16 V and is higher than 0.90 V of locust bean waste and 1.012 V for coal. The optimum peak power density recorded for the combined fuel (LBW & Coal) is 8.10 mW/cm², maximum current density of 43.2 mA/cm² with a resistance of 1 Ω. An efficiency of 73% was obtained from the combined carbon fuel which gave it a better performance in the direct carbon fuel cell operations. The scanning electron micrograph and X-ray diffraction reveals that the combined carbon fuels contain large sized particles with the highest peak of 26.637° with corresponding d-spacing of 3.42 Å similar to the coal carbon fuel. It was observed that finer particle morphology led to high current density and the presence of non-crystallites improved the current and power densities achievable with the fuel cell.

REFERENCES

- Adeniyi, O.D. & Ewan, B.C.R. (2012). Electrochemical conversion of switchgrass and poplar in molten carbonate direct carbon fuel cell. *International Journal of Ambient Energy*, 33:4, 204-208.
- Adeniyi, O.D., Ewan, B.C.R., Adeniyi, M.I. & Abdulkadir, M. (2014). The behaviour of biomass char in two direct carbon fuel cell designs, *Journal of Energy Challenges & Mechanics*, 1(4) 6, 1-6.
- Arenillas, A., Menéndez, J.A., Marnellos, G.E., Konsolakis, M., Kyriakou, V., Kammer, K., Jiang, C., Chien, A. & Irvine, J.T.S. (2013). Direct coal fuel cells (DCFC). The ultimate approach for a sustainable coal energy generation. *Bol. Grupo Español Carbón*, 29, 8-11.
- Cao, D., Sun, Y., Wang, G. (2007). Direct carbon fuel cell: Fundamentals and recent developments. *Journal of Power Sources*, 167(2), 250-257.
- Cherepy, N.J., Krueger, R., Fiet, K.J., Jankowski, A.F. & Cooper, J.F. (2005). Direct conversion of carbon fuels in a molten carbonate fuel cell. *Journal of the Electrochemical Society*, 152(1) A80-A87.
- Cooper, J.F., & Berner, K. (2005). The carbon/air fuel cell, conversion of coal-derived carbons" in: *The Carbon Fuel Cell Seminar*, Palm Spring, CA, Nov. 14th, UCRL-PRES-216953, 1-16.
- Cooper, J.F., & Cherepy, N. (2008). Carbon fuel particles used in direct carbon conversion fuel cells. *US Patent Publication*, No. US 2008/0274382 A1.
- Desclaux, P., Nürnberger, S., & Stimming, U. (2010). Direct carbon fuel cells", in R. Steinberger-Wilckens, W. Lehnert (eds.) *Innovations in Fuel Cell Technologies*, RSC Energy and Environment Series No. 2, Royal Society of Chemistry, Cambridge, 190-210.
- Dicks, A.L. (2006). The role of carbon in fuel cells. *Journal of Power Sources*, 156, 128-141.
- Dudek, M., Adamczyk, B., Sitarz, M., Sliwa, M., Lach, R., Skrzykiewicz, M., Raźniak, A., Ziabka, M., Zuwała, J. & Grzywacz (2018). The usefulness of walnut shells as waste biomass fuels in direct carbon solid oxide fuel cells, *Biomass and Bioenergy*, 119, 144-154.
- Giddey, S., Badawal, S.P.S., Kulkarni, A. & Munnings, C. (2012). A Comprehensive Review of Direct Carbon Fuel Cell Technology. *Progress in Energy and Combustion Science*, 38, 360 - 399.
- Hoogers, G. (2003). Fuel Cell Technology Handbook. *CRC Press LLC*, Florida.
- Jain, S.L., Lakeman, J.B., Pointon, K.D. & Irvine, J.T.S. (2007). A novel direct carbon fuel cell concept. *Fuel Cell Science & Technology*, 4, 280-282.
- Jain, S.L., Lakeman, J.B., Pointon, K.D., Marshall, R. & Irvine, J.T.S. (2009). Electrochemical performance of a hybrid direct carbon fuel cell powered by pyrolysed MDF. *Energy Environ. Sci.* 2, 687-693.
- Jia, L., Tian, Y., Liu, Q., Xia, C., Yu, J., Wang, Z., Zhao, Y., & Li, Y., (2010). A direct carbon fuel cell with (molten carbonate)/(doped ceria) composite electrolyte. *J. Power Sources*, 195:5581-5586.
- Kacprzak, A., Kobylecki, R. & Bis, Z. (2017). The effect of coal thermal pretreatment on the electrochemical performance of molten hydroxide direct carbon fuel cell. *Journal of Power Technologies* 97 (5) (2017) 382-387.
- Larminie, J. & Dicks, A. (2003). Fuel cell systems explained. 2nd edition, John Wiley & Sons Ltd., England.
- Li, X., Zhu, Z.H., de Marco, R., Bradley, J. & Dicks, A. (2010). Evaluation of Raw Coals as Fuels for Direct Carbon Fuel Cells. *Journal of Power Sources*, 195 (13): 4051 - 4058.
- Munnings, C., Kulkarni, A., Giddey, S., & Badwal, S.P.S. (2014). Biomass to power conversion in a direct carbon fuel cell. *International Journal of Hydrogen Energy*, 39, 12377-12385.
- Zecevic, S., Patton, E.M., & Parhami, P. (2004). Carbon-air fuel cell without a reforming process. *Carbon*, 42, 1983-1993.