


Journal of
NIMechE
Journal of the Nigerian Institution of Mechanical Engineers

VOL. 9, NO. 1

ISSN 2141-2987 MARCH, 2019

**10TH ANNIVERSARY
SPECIAL EDITION**

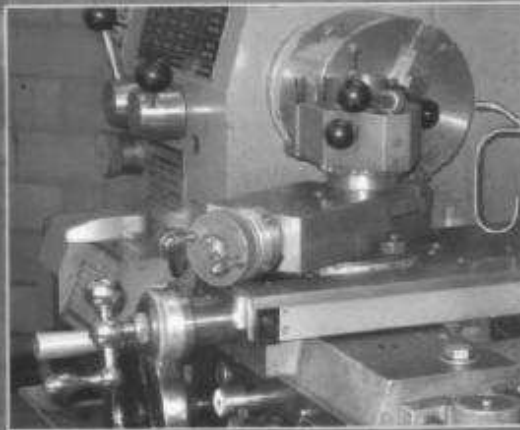

The Nigerian Institution of Mechanical Engineers
(A Division of The Nigerian Society of Engineers)

Journal of the Nigerian Institution of Mechanical Engineers



MARCH, 2019
ISSN 2141-2987



JOURNAL OF THE NIGERIAN INSTITUTION MECHANICAL ENGINEERS
MARCH 2019 VOL.9 NO.1 ISSN 2141-2987

Publisher: The Nigerian Institution of Mechanical Engineers (NIMEchE)
National Head Quarter
10 Damaturu Close, Opposite H-Medix by Domino's Pizza,
3rd Avenue, Gwarimpa, Abuja, FCT.
Email: nimech1@yahoo.com
Website: www.nimeche.org

The Nigerian Institution of Mechanical Engineers 2019

This publication is copyright under the international copyright convention. All rights reserved. Apart from any fair dealing for the purpose of private study, research, criticism, or review, as permitted under the copyright convention, no part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means without the prior permission of the publisher. Unlicensed multiple copying of the contents of the publication without permission is illegal.

The publisher is not responsible for any statement made in this publication. Data, discussion, and conclusions developed by authors are for information only and are not intended for use without independently substantiating investigation on the part of potential users. Opinions expressed are those of the authors and are not necessarily those of the Institution.

AIMS AND SCOPE OF THE JOURNAL

The Journal of The Nigerian Institution of Mechanical Engineers publishes well researched, original and high-quality papers from the academia and industry on Mechanical Engineering Science and its applications. The papers may be of a fundamental nature addressing analysis and experiments, reports of advances in Mechanical Engineering theories, techniques, methodologies, applications and practice. Papers may also be of reports of designs, development and service experience by practicing engineers in industry. The journal strives to bridge the gaps between Research and Development and practical applications of Mechanical Engineering Knowledge.

The Scope includes:

- Production Engineering
- Power and Energy Systems
- Maintenance Engineering and Management
- Metallurgical Engineering
- Machinery Design and Fabrication
- Automobile Engineering
- Operations Research
- Building Services Engineering
- Nano Systems
- Reliability Engineering
- Engineering Tribology
- Mechanical Engineering Science

EDITOR-IN-CHIEF

Engr. Dr. Okopi Alex Momoh, FNSE
Mechanical Engineering Dept
School of Industrial Engineering
College of Engineering
Kaduna Polytechnic
PMB 2021, Kaduna
Tel: 08037196213, 08050366684
Email: okopimomoh@yahoo.com

EDITORIAL ADVISERS

Prof. E.I.E Ofodile FNSE,
FNIMEchE
Mechanical Engineering Department
Faculty of Engineering
Nnamdi Azikiwe University, Awka
Anambra State

Prof. Abdu Salihi FNSE,
FNIMEchE
Mechanical Engineering Department
Faculty of Technology
Bayero University Kano
Kano State

Prof. L.O Adekoya FNSE,
FNIMEchE
Mechanical Engineering Department
Faculty of Engineering
Obafemi Awolowo University
Ile-Ife Osun State

Prof. H.I Hart FNSE, FNIMEchE
Mechanical Engineering Department
Faculty of Engineering
Rivers State Univ. of Science &
Tech

EDITORIAL BOARD

Professor Adisa Bello
Professor B. O. Oloche
Professor S.N. Ojobor
Professor E.S.A Ajisegiri
Professor P. Aiyedun
Professor S. B. Adeyemo
Professor A. U. Alhaji
Professor D. B. Yahaya
Professor O. K. Abubakre
Professor Y. Pam
Professor I. Garba
Dr. J.H. Abu
Professor N.A. Ademoh
Dr. J.O. Akindapo
Dr. J.A. Adeyemo
Dr. Uche Obiajulu
Professor F.O. Anafi
Dr. Jacob Aweda
Dr. E.J. Upahi
Dr. Musa Zarmai
Dr. Ismail Isa Dikoto

Abubakar Tafawa Balewa University Bauchi
University of Abuja, Gwagwalada
Caritas University, Enugu
University of Agriculture, Abeokuta
University of Agriculture, Abeokuta
University of Ado Ekiti
Bayero University, Kano
Bayero University, Kano
Federal University of Technology, Minna
Ahmadu Bello University, Zaria
Bayero University, Kano
Federal University of Technology, Minna
Federal University of Technology, Minna
Nigerian Defense Academy, Kaduna
Lagos State Polytechnic, Ikorodu
Chevron Nigeria PLC
Ahmadu Bello University, Zaria
University of Ilorin
Kaduna Polytechnic
University of Abuja
Usman Danfodio University, Sokoto

EDITORIAL

The Journal of The Nigerian Institution of Mechanical Engineers (JNIMEchE) was established in 2009 with a vision to create a learned Journal that is recognized internationally for its high academic scholarship and practical applications of Mechanical Engineering Science. Our mission has been to frequently publish articles that are well researched, original and of high quality from the academia and the industry. To ensure that we meet our quality standard, we carefully chose at the commencement of publication some outstanding Mechanical Engineers as Editorial Advisers and Members of the Editorial Board. All the members of the Board are Engineers who are very knowledgeable in their areas of professional practice. Our demand for originality and new concepts in engineering applications in research papers is ever increasing. Prospective authors should note that the Editorial Board focuses on high impact papers with innovative outcomes.

Our regular March and September editions for 2019 are dedicated to the 10th Anniversary of the Journal (2009 to 2019). We consistently published the two editions every year since 2009 except in 2013. Having midwived and sustained the production of the Journal as the Editor-In – Chief for ten years since it was established when I was the National Chairman, it is time to hand over to a new Team to continue with the production. It has been a great time of learning and fulfilment for me to see many of our members in the academia achieve high academic positions from the contributions of the Journal. Unfortunately, we have not been able to put the Journal into the International gateway which we must do.

The March 2019 edition of the Journal consists of papers in subject areas of Heat Transfer and Waste Heat Recovery, Fluid dynamics, Composite Materials, Renewable Energy, Operations Research, Ergonomics, Safety Engineering and Environmental Waste Management. The Board is grateful to the authors who submitted well researched papers, the Editorial Advisers and members of the Editorial Board who meticulously reviewed the articles in line with our set standards. Thank you for your co-operation and support that have made us to produce this special 10th Anniversary Edition of the Journal.

Engr. Dr. Okopi Alex Momoh FNSE, FNIMEchE, FNIM
Editor-In-Chief

**Journal of
The Nigerian Institution of Mechanical Engineers
March 2019 Edition Vol. 9, No. 1 ISSN2141-2987**

- Evaluation of the Effects of Pyrogas on the Performance Parameters of a Stationary Diesel Engine** 1-7
Akinola Adebisi Olayinka
- Exergy Analysis of 30mw AES Barge Mounted Gas Turbine Power Plant** 8-23
D. A. Aderibigbe and G. Osunbor
- Numerical Analysis of Relationship between Fluid Flow Pattern on Corrosion behaviour in Pipe Bends** 24-32
M. M. Muhammadu, E. E. Kangon, M.D. Bako and B. Alkali
- Assessment of Person-centricity Contest in Some Home-made Furniture items in Nigeria** 33-46
Ashiedu Festus Ifeanyi, Oyejide, Oluwayomi Joel, Akpan Emem E., and Agnes Essien Oboh,
- Heat Transfer in Cooled Aero-Derivative Turbine blade: A Numerical Analysis** 47- 55
Adamu, M. Orah; A. Nasir; A. B. Hassan; I. Bori
- Safety Evaluation of Common Machine Tools in Nigeria** 56-69
Kazeem A. Adebisi, Abiola O. Ajayeoba, Wasiu A. Raheem, Olutosin O. Ilori and Ayowumi R. Soji – Adekunle
- Cost Optimization for Distribution Networks Using Minimization Optimization Model** 70-78
Celine Nwosoro, Ademola B. Adisa, Lukman N. Abdulkadir
- Measurement and Control of Noise Generation in Manufacturing Industries: (A Case Study of United Cement (UNICEM), Calabar.** 79-93
Stephen. A. Takim
- Design, Sizing and Optimization of an Hybrid Solar - Wind Power System Using Homer Model.** 94-105
U. V. Akpan, A. Kwaghger, J. S. Ibrahim

**Physical Properties of Palm Kernel and Goat fur Fiber
Reinforced High Density Polyethylene (HDPE) Composite** 106-114
D.S. Yawas, O.L. Ntibunka, M. Iorpenda Jnr, F.A. Orsar, O.A. Owolabi

**Development of a Screw Press Briquetting Machine for the
Conversion of Municipal Solid Wastes** 115 -124
Mathew Asor, C. O. Ijagbemi and O. M. Olabanji

NUMERICAL ANALYSIS OF RELATIONSHIP BETWEEN FLUID FLOW PATTERN ON CORROSION BEHAVIOUR IN PIPE BENDS

M. M. Muhammadu^{1*}, E. E. Kangon², M.D. Bako³ and B. Alkali⁴

¹³Department of Mechanical Engineering, Federal University of Technology, P. M. B., 65, Gidan-Kwanu, Minna, Nigeria

²Department of Thermo-fluids Engineering, Faculty of Mechanical Engineering UniversitiTeknologi Malaysia, 81310, Johor Bahru, Malaysia.

⁴Department of Mechatronics Engineering, Federal University of Technology, P. M. B., 65, Gidan-Kwanu, Minna, Nigeria

Corresponding author: masin.muhammadu@futminna.edu.ng

Abstract:

One problem facing today's production and processing, desalination and nuclear power industries is flow-accelerated corrosion in pipe elbows. The simulations are being performed using the AUTODESK Simulation 2013. The objective is to establish the relationship between the fluid flow patterns and corrosion behaviour within the pipe bend. The results of the simulations of the flow in form of velocity vectors for two types of pipe bend, both mitred bend and smooth bend with three different Reynolds number 37387, 49850 and 62313 respectively. From the results obtained, it is observed that the mitre bend produces more wall shear stress, turbulent intensity and turbulent kinetic energy compared to the smooth bend and thus predicted to produce more corrosion. However, with realizable k- ϵ model, more significant differences are evident when compared with RNG k- ϵ model and standard k- ϵ turbulence model. The maximums in both turbulent intensity, wall shear stress as well as turbulent kinetic energy now appear on the outer radius, near the elbow exit.

Keyword: Mitre bend, Smooth bend, Wall shear stress, Turbulent intensity, Corrosion

1.0 INTRODUCTION

Flow-accelerated corrosion (FAC) is a phenomenon that causes the loss of iron from the wall of pipe, vessels, and equipment made of carbon steel. It has been reported that the piping made of carbon or low-alloy steel have been suffering from continuous wall thinning in pressurized water reactors (PWR's) and CANDU type reactors. Scholars have proposed some models to predict the FAC rate. These models are based on the mass transfer theory, and the calculated results are in accordance with the laboratory experiments. For instance, Berger *et al* put forward a prediction model about FAC rate,

which assumed that when the insoluble Fe_3O_4 met the condition of the equation of Swecton and Bases, then the flux of dissolved Fe^{2+} could be employed to express the FAC rate. This model emphasized the FAC process of electrochemical reactions and mass transfer. However, this model could not explain the relationship between temperature and FAC rate (Berger, *et al.*, 1980 and Muhammadu, *et al.*, 2013).

Also, one problem facing today's production and processing, desalination and nuclear power industries is flow-accelerated corrosion in pipe elbows.

When fluid, in this case water, /simulated seawater passes through pipe elbow, the interaction between centrifugal and viscous forces creates a strong secondary flow in the plane normal to the pipe axis. This secondary flow consists of two counter-rotating vortices, one in either half of the pipe cross section. The scouring action of these vortices is believed to accelerate the processes of corrosion of the pipe wall; this in turn may lead to excessive vibrations, and possibly create a breach in the wall itself (Pietralik, 2012 and Muhammadu, *et al.*, 2016).

This paper presents Computational Fluid Dynamics (CFD) simulations of the flow in both mitre and smooth bends. The simulations were performed using the AUTODESK 3-D 2013 software Inc. The goal of the simulations is to gain a better understanding of the phenomena influencing the corrosion that occur within the pipe elbow. This also describes the model geometry and the mesh used as indicated in Figure 1.




Figure 1: The flow structure of the elbow.

The idea of inner flow region called boundary layer which could be define as a very thin region of flow near wall where viscous forces and rationality cannot be

ignored. The boundary layer thickness was the main parameter to be considered in the boundary layer solution. This thickness depended on the Reynolds number along the flat surface. However, the value of this Reynolds number depends on the free-stream velocity and the distance from front wall of bend (Ablikim, *et al.*, 2013, Muhammadu, *et al.*, 2014 and Hashimoto, *et al.*, 2015).

2.0 AUTODESK CALCULATION

The Autodesk software 2013 was used to calculate the elbow system, which sets up a 3Dmodel according to the structure of Figure 2. The mesh type was T-grid, and k-e turbulent model is used in the calculation process. Inlet boundary condition is set as velocity-inlet, and outlet boundary condition is set as pressure-outlet. SIMPLEC was adopted when calculating pressure and velocity coupling, and standard discretization was used as pressure discretization.

Momentum equations, turbulent kinetic energy and turbulentkinetic energy dissipation are applied in the second-order windward discretization. The operating parameters as in Table 1.

The symmetrical distribution of the velocity magnitude of the elbow system and the elbow cross-section of $u^{1/4}458$ was shown in Figure3. Figure 3 show that the flowing core shifts to the outward bend of the elbow, and the velocity of the inward bend of the elbow is greater than that of the outward bend of the elbow. The mass transfer coefficient of the cross-section of $\theta = 45^\circ$.

Table 1: Operating parameters used for simulation.

Temperature (°C)	Pressure (MPa)	Flow velocities (m/s)	Material/ Fluid	Electrical conductivity ($\mu\text{S}/\text{cm}$)	Concentration of dissolved oxygen (ppm)
125	0.2	1.5, 2,0 & 2.5	Water	34.9	3.1

A dimensionless variable for the Reynolds number which is simply a ratio of the fluid dynamic force and the fluid viscous forces, is used to determine what flow pattern will occur. The equation for the Reynolds number is

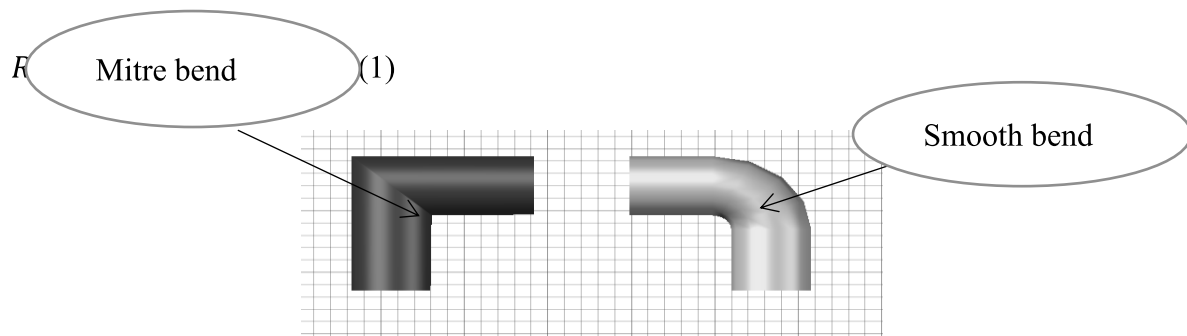


Figure2: Mitre bend and smooth bend

The Figure 2 indicates the schematic diagram various bends.

3. TURBULENT INTENSITY MEASUREMENTS

Turbulence Intensity is a scale characterizing turbulence expressed as a percent. an idealized flow of fluid with absolutely no fluctuations in fluid speed or direction would have a turbulence intensity value of 0%. This idealized case never occurs on earth. However, due to how Turbulence Intensity is calculated, values greater than 100% are possible.

Turbulence Intensity (T. I.) is defined in the following equation:

$$T. I. = w / U \quad (2)$$

Where w represent the Root-mean-square (RMS), or standard deviation, of the turbulent velocity fluctuations at a particular location over a specified period of time, and U represents the average of the velocity at the same location over same time period respectively or

$$T. I. = \frac{\sqrt{(u^2)}}{\bar{u}} \quad (2a)$$

The intensity of the velocity fluctuation will be measured or represented also. The flows in elbows are entirely in the regime.

$$\text{Turbulence Intensity: } \frac{u_{max.}}{\bar{u}} \quad (3)$$

From the definition of $u_{max.}$ given as the standard deviation of the set of “randow”

velocity fluctuations, u'_1 (equation 2a). Similar definitions apply to the lateral and vertical velocities, $v(t)$. A larger u_{max} indicates a higher level turbulence. The shearing force F acts on the area on the top of the element. Thus, the wall shear stress, which is equal to force per unit area, that is Wall shear stress, $\tau = \frac{F}{A}$

(4)

Where F = force and A = area. The deformation which this shear stress causes is measured by the size of the angle ϕ and is known as shear strain. Using the experimental result that shear stress is proportional to rate of shear strain, then

$$\tau = \text{constant} \times \frac{u}{y} \quad (5)$$

The term $\frac{u}{y}$ is the change in velocity with respect to y , or the velocity gradient, and may be written in the differential form $\frac{du}{dy}$.

The constant of proportionality is known as the dynamic viscosity, μ , of the fluid giving:

$$\tau = \mu \frac{du}{dy} \quad (6)$$

Because the turbulent motions associated with the eddies are approximately random, this can characterize them using statistical concepts. In theory the velocity record is

continuous and the mean can be evaluated through integration. Below an overbar is used to denote a time average over the time interval t to $t + T$, where T is much longer than any turbulence time scale, but much shorter than the time-scale for mean flow unsteadiness, e.g. wave or tidal fluctuation.

$$\begin{aligned} \text{Mean velocity: } \bar{u} &= \int_t^{t+T} u(t) dt \\ &= \frac{1}{N} \sum_1^N u_1 \end{aligned} \quad (7)$$

Where $\int_t^{t+T} u(t) dt$ is continuous record and $\frac{1}{N} \sum_1^N u_1$ is equal to discrete, equi-spaced point

Turbulent Fluctuation:

$$u'(t) = u(t) - \bar{u} \quad (\text{continuous record}) \quad (8)$$

$$u'_1 = u_1 - \bar{u} \quad (\text{discrete points})$$

Turbulence strength: u_{max} =

$$\sqrt{u'(t)^2} = \sqrt{\frac{1}{N} \sum_{i=1}^N (u_i^2)} \quad (9)$$

Where $\sqrt{u'(t)^2}$ represent the continuous record and $\sqrt{\frac{1}{N} \sum_{i=1}^N (u_i^2)}$ represent the discrete, equi-spaced points respectively.

4.0 SIMULATION RESULTS AND DISCUSSION

The residuals in the governing equations had all fallen below 10^{-4} after a total of 3250 iterations had been performed, at which point the solution was considered converged. In addition to monitoring the residuals, the mass flow rate at the outlet was computed every couple of hundred iterations and compared to the (specified) mass flow rate at the inlet, 2.379 kg/sec. as shown in Figures 3 to 10 respectively.

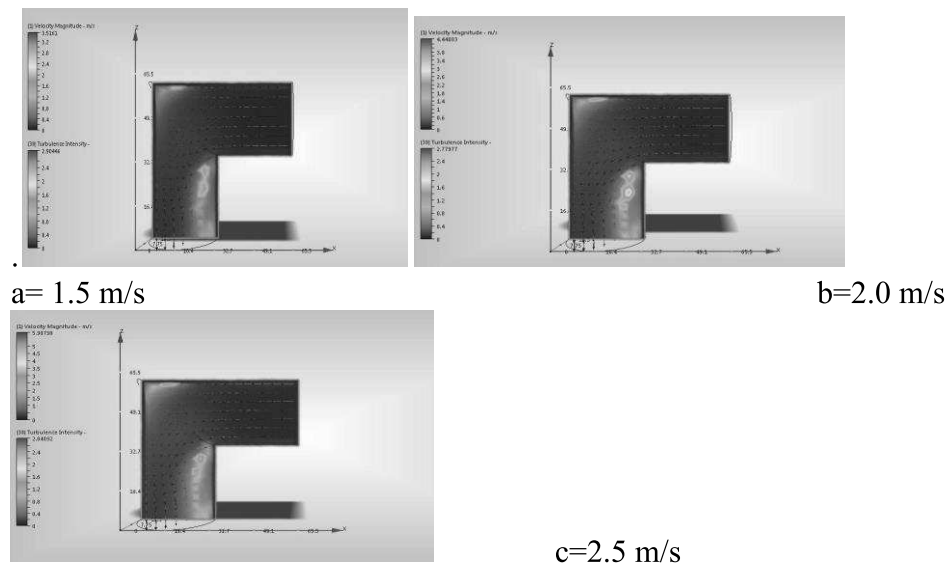
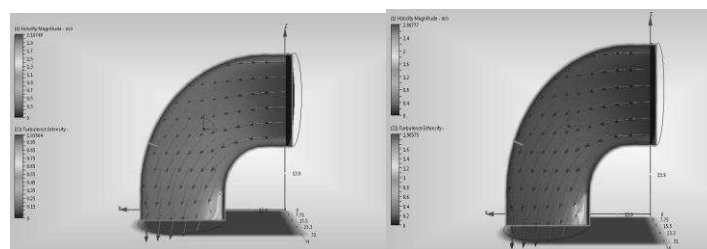


Figure 3: Turbulence intensity in Mitre bend with various fluid flow 1.5 m/s, 2.0 m/s and 2.5 m/s.



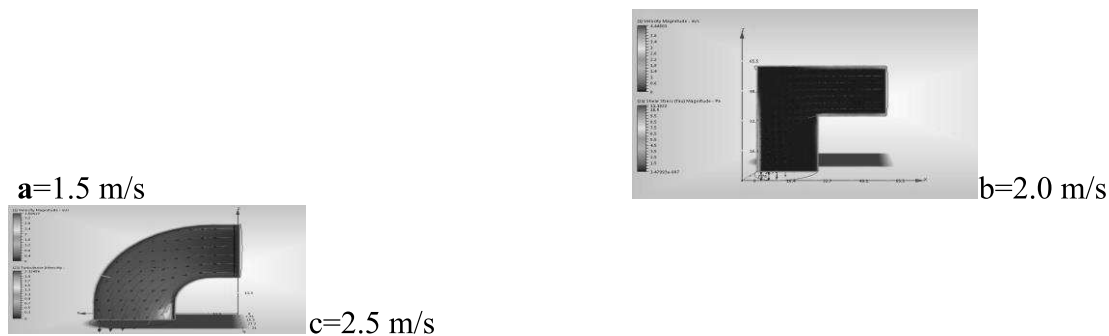


Figure 4: Turbulence intensity in Smooth bend with various fluid flow 1.5 m/s, 2.0 m/s and 2.5 m/s.

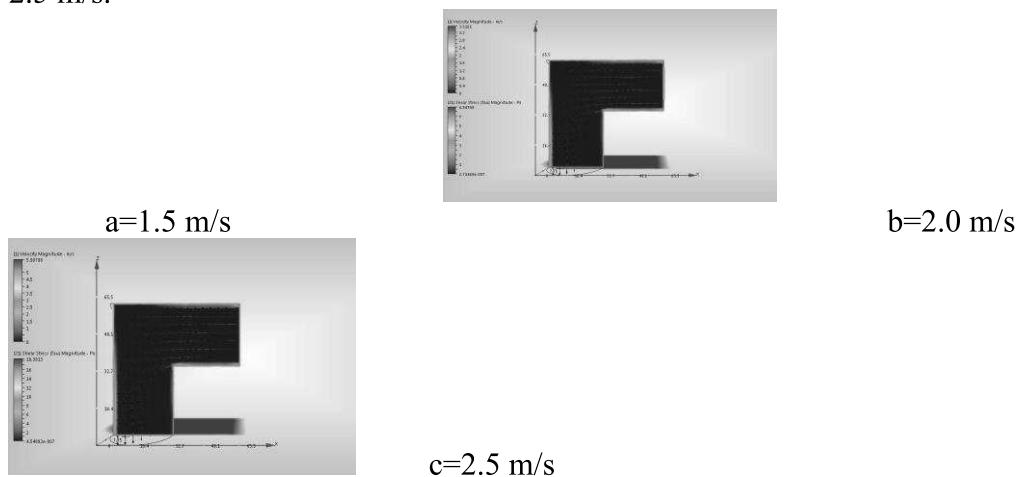


Figure 5: Wall shear stress in Mitre bend with various fluid flow 1.5 m/s, 2.0 m/s and 2.5 m/s.

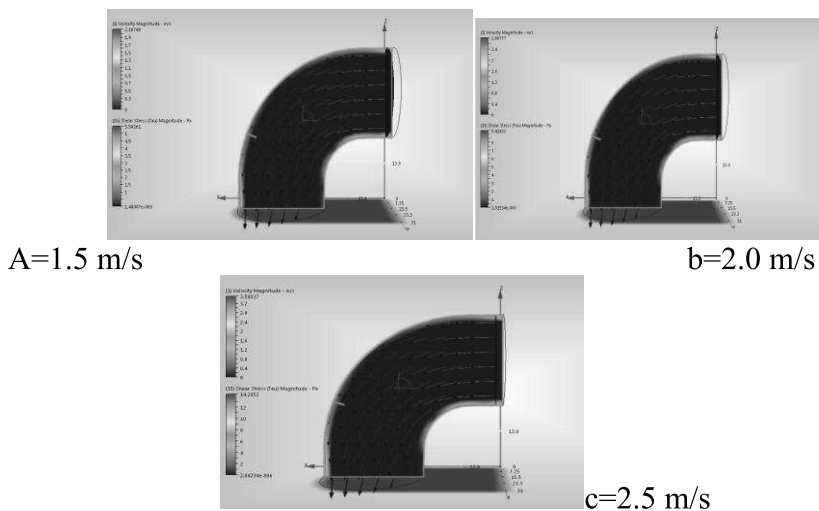
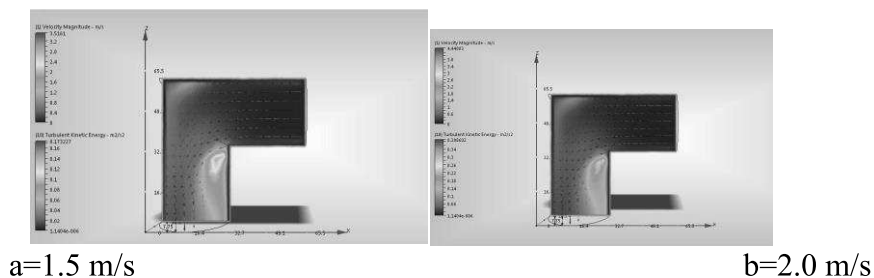


Figure 6: Wall shear stress in Smooth bend with various fluid flow 1.5 m/s, 2.0 m/s and 2.5 m/s.



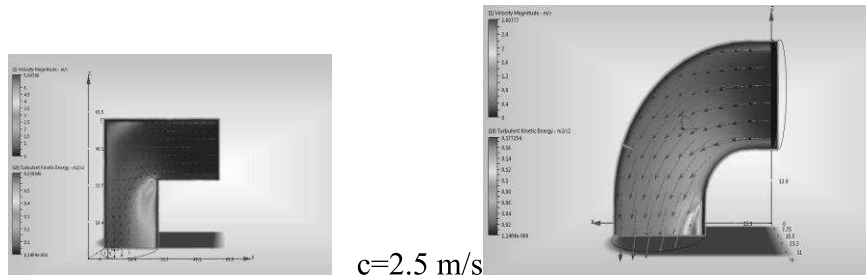


Figure 7: Turbulent Kinetic Energy in Mitre bend with various fluid flow 1.5 m/s, 2.0 m/s and 2.5 m/s.

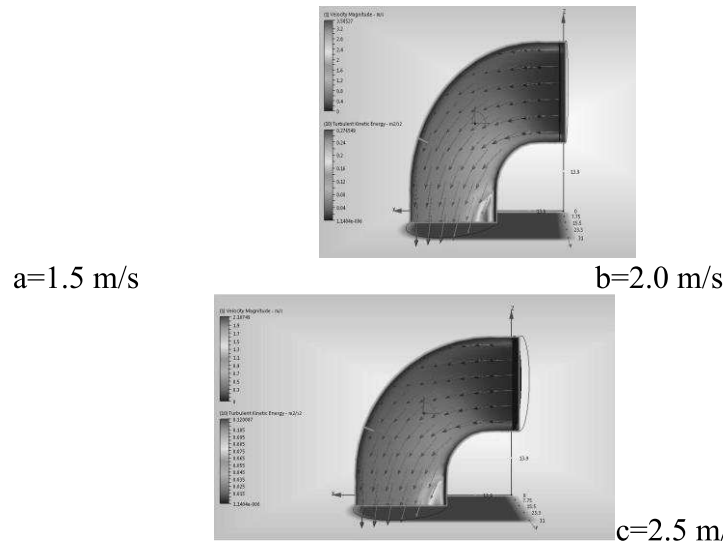


Figure 8: Turbulent Kinetic Energy in Smooth bend with various fluid flow 1.5 m/s, 2.0 m/s and 2.5 m/s

In Figures 9 to 11, it was observed that the values of mitre bend produced were significantly higher than the values of smooth bend.

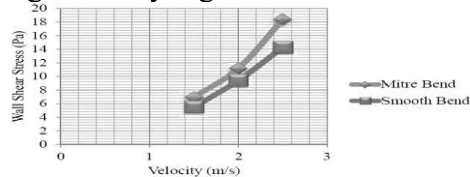


Figure9: Graph of Wall Shear Stress against Fluid Flow Velocity

From, the wall shear stress graph, it was noted that the mitre bend produce 18 to 29 % more shear stress when compared to the smooth bend as shown Figure 11.

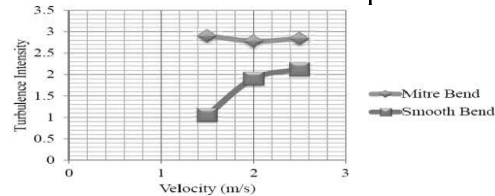


Figure10: Graph of Turbulence Intensity against Fluid Flow Velocity

While, for the turbulence intensity graph, the mitre bend produces 33 to 175 % more intensity than smooth bend which means that the turbulence produced by mitre bend could almost triple the amount of turbulence produced by smooth bend at the same fluid flow velocity as shown in Figure 10.

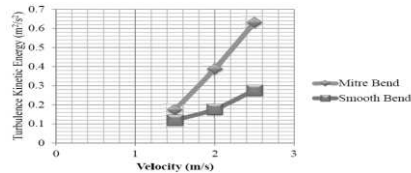


Figure11: Graph of Turbulence Kinetic Energy against Fluid Flow Velocity

Also, for the turbulence kinetic energy, the mitre bend produced 44 to 128 % more turbulence kinetic energy compared to the smooth bend as shown in Figure 11.

From the simulation results, the mitre bend will get corroded easily as results of cavitation and impingement compared to the smooth bend as the mitre bend shows higher values of parameters that contributed for the corrosion to occur.

Furthermore, as per the effect of increasing velocity on the probability of erosion-corrosion to occur, it can see almost all values of wall shear stress, turbulence intensity and turbulence kinetic energy were directly proportional to the increase in fluid flow velocity. From the graph of wall shear stress against fluid flow velocity, every increase in velocity resulting in 60 to 64 % more shear stress at mitre bend and 51 to 71 % more shear stress at smooth bend.

While for the relationship between turbulence intensity with fluid flow velocity, it can be seen that as the velocity increases, the turbulence intensity is not affected much in the mitre bend with average of 3 % difference. A different phenomenon occurs at the smooth bend where the turbulence intensity is directly proportional to the increase of fluid flow velocity.

5.0 Effect of fluid flow velocity on the wall shear stress, turbulence intensity and turbulence kinetic energy

The effect of increasing velocity on the probability of erosion corrosion to occur, it can be seen almost all values of wall shear

stress, turbulence intensity and turbulence kinetic energy are directly proportional to the increase in fluid flow velocity. From Figure 11, the graph of wall shear stress versus fluid flow velocity, every increase in velocity resulting in 60 to 64 % more shear stress at mitre bend and 51 to 71 % more shear stress at smooth bend.

Also, the relationship between turbulence intensity with the fluid flow velocity, it could be observed in Figure 12 that as the velocity increase, the turbulence intensity were not that effected much in the mitre bend with average of 3 % difference. A different phenomenon occurs at the smooth bend where the turbulence intensity is directly proportional to the increase of fluid flow velocity. The graph shows that the turbulence intensity increases up to 11 to 80% more as the fluid velocity increase. This show that the designs of mitre bend maintains turbulence intensity as the fluid velocity increase from 1.5m/s to 2.5 m/s.

The increase of fluid velocity affects the turbulence kinetic energy in similar manner with on how it's effect on the wall shear stress. When the velocity increases, the turbulence kinetic energy increases up to 61 to 124 percent more at mitre bend and 47 to 56 percent at smooth bend as shown in Figures 10 to 11. This shows that the turbulence kinetic energy is directly proportional to the velocity of fluid flow. Therefore, by increasing the velocity, the corrosion caused by the turbulence kinetic energy should also be increasing, which agrees with Zhang, et al., (2013)

The corrosion was predicted to be occurring on the area circled as shown in Figures 12 to 13.

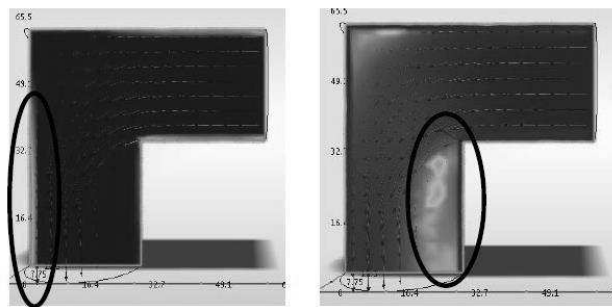


Figure 12: Predicted area for corrosion to occur at mitre bend

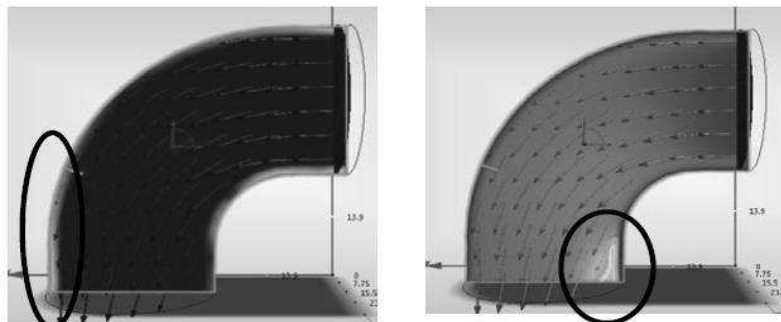


Fig. 13: Predicted area for corrosion to occur at smooth bend

CONCLUSIONS

The behaviour of fluid flow pattern and the affected parameters such as wall shear stress turbulence intensity and turbulence kinetic energy were conducted numerically. In this study, the flow pattern with the corrosion in pipe bend was related which focused on two type of pipe bend.

From the results of the simulation, the conclusions were drawn as follows:

1. Mitre bend produce 18 – 29 % more shear stress and 33 – 175 % more turbulence intensity compared to smooth bend and thus are predicted to produce more corrosion within pipe.
2. Increases in fluid flow velocity from 1.5 m/s to 2.5 m/s produced 51 – 71 % more shear stress and 2 – 11 % increases in turbulence intensity and thus causes more corrosion within the elbow pipe.
3. The wall shear stress and turbulence intensity occurred mainly on pipe elbow.

REFERENCES

- Ablikim, M., Achasov, M., Ai, X., Abayrak, O., Ambrose, D., An, F., An, Q., Bai, J., Ferroli, R. B. and Ban, Y. (2013). Observation of a Charged Charmoniumlike Structure in $E^+E^- \rightarrow \Pi + \Pi^- J/\Psi$ at $S = 4.26$ Gev. *Physical Review Letters*.110(25),252001.
- Berger P., Ducreux, J., Saint-Paul P., (1980). Effect of Chemistry on Corrosion-erosion of Steels in Water and Wet Stream. *Proceeding of Second Conference on Water Chemistry*, Pp 56-60.
- Hashimoto, T., Tanno, I., Yasuda, T., Tanaka, Y., Morinishi, K. and Satofuka, N. (2015). Higher Order Numerical Simulation of Unsteady Viscous Incompressible Flows using Kinetically Reduced Local Navier–Stokes, Pp 88-90.
- Mazumder, Q. H. (2012). Computational Fluid Dynamics Analysis of Single and

- Multiphase Flow Characteristics in Elbow, *Corrosion Science* Pp 22-26.
- Muhammadu M. M., Sheriff J. M. and Hamzah E. B., (2013). Effects of Flow Pattern at Pipe Bends on Corrosion Behaviour of Low Carbon Steel and its Challenges, *Jurnal of Teknologi (Science and Engineering)* 62.1 Pp102-112.
- Muhammadu M. M. and Bello A., (2016). Experimental investigation of Flow Induced Corrosion on the smooth elbows, *Journal of Advanced Research in Fluid Mechanics and Thermal Sciences*, vol.28(1) Pp 1– 6.
- Muhammadu M. M., Kahar O. and Hamzah E., (2014). Numerical methodology to determine fluid flow pattern with corrosion in pipe bends using computational fluid dynamics software, *ARPN Journal of engineering and applied sciences*, vol. 9(10) Pp 1978 – 1982.
- Pietralik, J. M. (2012). The Role of Flow in Flow-Accelerated Corrosion under Nuclear Power Plant Conditions. *EJ. Adv. Maint.* 4(2), Pp 63-78.
- Zhang, G., Zeng, L., Huang, H. and Guo, X. (2013). A Study of Flow Accelerated Corrosion at Elbow of Carbon Steel Pipeline by Array Electrode and Computational Fluid Dynamics Simulation. *Corrosion Science.* 77 Pp334-341.
- Zhu, X., Lu, X. and Ling, X. (2013). A Novel Method to Determine the Flow Accelerated Corrosion Rate in the Elbow. *Materials and Corrosion.* 64(6), Pp 486-492.