

SCHOOL OF PHYSCIAL SCENCES 1st BIENNIAL INTERNATIONAL CONFERENCE

PROCEEDINGS

Theme:

Science Technology and Innovation (STI): The Vision for Poverty Reduction and Sustainable Development

FEDERAL UNIVERSITY OF TECHNOLOGY MINNA, NIGER STATE, NIGERIA

PREFACE

This is the first international Conference organized by the school of Physical Sciences of the Federal University of Technology, Minna Nigeria the school is relatively new and consisting of the Departments of Physics, Chemistry, Mathematics, Statistics, Geology and Geography. It was exercised from the former school of Natural and Applied Sciences on the 6th of November 2014.

The school of Physical Sciences 1st Biennial International Conference is an interdisciplinary forum for the presentation of new ideas, recent developments and research findings in the field of Science and Technology. The Conference provides a platform to scholars, researchers in the academics and other establishments to meet, share and discuss how science and technology can help reduce poverty and bring about sustainable development. Submissions were received both nationally and internationally and severally reviewed by our international program committee. All contributions are neither published elsewhere nor submitted for publication as asserted by contributor.

We wish to express our gratitude to the school for challenging us to organize the first international conference. Special thanks to the Dean of the School Prof. A. S. Abubakar. Special thanks to all members of the organizing committee and sub-committee for their dedication, determination and sacrifice towards achieving a fruitful and successful conference.

The Local Organizing Committee Chairman Kasim Uthman Isah (PhD).

Theme:

Science Technology and Innovation (STI): The Vision for Poverty Reduction and Sustainable Development

Sub-Themes

Scientific Research, Innovation and Entrepreneurship for Sustainable Development.

Scientific Research and Technological Development as tool for Poverty Reduction.

Scientific Research for Renewable Energy in Sustainable Energy Development.

Material Science, Nanoscience and Emerging Technologies in Sustainable Development.

Gender Issues in Quality Scientific Research Innovation and Sustainable Development.

CONTENT

PREFACE
Theme
INTERNATIONAL PLANNING COMMITTEE
LOCAL ORGANISING COMMITTEE
KEYNOTE SPEAKERS
COMPARATIVE ANALYSIS OF BASIC MODELS AND ARTIFICIAL NEURAL NETWORK BASED MODEL FOR PATH LOSS PREDICTION
CHARACTERIZATION OF VIRGIN ASPHALTENES AND ITS SUBFRACTIONS USING UV-VISIBLE AND FTIR SPECTROSCOPY
STRUCTURAL AND MICROSTRUCTURAL STUDY OF GAMMA RAY-IRRADIATED
CO-DOPED BARIUM TITANATE (BA0.88CA0.12TI0.975SN0.025O3)46
DESIGN OF STAND-ALONE SOLAR POWER SYSTEM FOR HOUSEHOLD ELECTRIFICATION IN MINNA, NIGER STATE, NIGERIA
EVALUATION OF WIND ENERGY POTENTIAL FOR ELECTRIC POWER GENERATION IN GUSAU, NORTH WESTERN, NIGERIA
INTEGRATED GEOLOGY, MINERALOGY AND GEOCHEMISTRY INVESTIGATIONS OF THE MINNA-TEGINA-MAKERA ROAD NORTH WESTERN NIGERIA: IMPLICATION ON FAILED PORTION
PALM BUNCH MANAGEMENT AND DISPOSAL AS SOLID WASTE AND THE STABILIZATION OF OLOKORO LATERITIC SOIL FOR ROAD CONSTRUCTION PURPOSES IN ABIA STATE, NIGERIA
GEOTECHNICAL INVESTIGATION OF THE SUBSURFACE FORMATIONS USING ELECTRICAL RESISTIVITY METHOD IN NORTHERN PART OF PAIKO TOWN, NIGER STATE, NIGERIA
A 4- STAGE RUNGE-KUTTA TYPE METHOD FOR SOLUTION OF STIFF ORDINARY DIFFERENTIAL EQUATIONS 103
THE MENACE OF THE GEO-ENVIRONMENTAL HAZARD CAUSED BY GULLY EROSION IN ABIA STATE, NIGERIA.112
FIFTH-ORDER FIVE-STAGE EXPLICIT ALMOST RUNGE-KUTTA METHODS
FOURTH ORDER TRIGONOMETRICALLY-FITTED IMPROVED RUNGE-KUTTA METHOD
ASSESSMENT OF IMPACT OF ACTIVITIES OF LOCAL ROAD MAINTENANCE ON THE MINNA-KATAEREGI HIGHWAY, NORTH CENTRAL NIGERIA
PALYNOFACIES ANALYSIS OF IDA 4 WELL, NIGER DELTA, NIGERIA
INFLUENCE OF GEOLOGY AND HYDROGEOLOGICAL CONDITIONS ON THE PERFORMANCE OF A ROAD PAVEMENT BETWEEN SHANGO AND CHANCHAGA ALONG MINNA –LAMBATA ROAD, CENTRAL NIGERIA165
ANALYSIS OF STRUCTURE, MICROSTRUCTURE AND CHEMICAL COMPOSITION OF SOLID SOLUTION OF CO- DOPED BARIUM CALCIUM STANNATE TITANATE $(BA_{1-x}CA_xTI_{0.975}SN_{0.025}O_3)$ ($0 \le X \ge 0.12$)174
STRUCTURAL AND UV-VIS SPECTROSCOPY STUDIES OF GAMMA IRRADIATED STARCH FROM <i>DIOSCOREA</i> ROTUNDATA
BEHAVIOURAL ANALYSIS OF DAILY RAINFALL PATTERN IN KATSINA
DETERMINATION OF HEAVY METALS IN SELECTED VEGETABLES, ALONG LANDZUN RIVER OF BIDA, NIGER STATE, NIGERIA
ANALYSIS OF EFFECTS OF UNDESIRED COURSE OF STUDY ON STUDENTS' ACADEMIC ACHIEVEMENT IN NIGERIA, USING BINARY LOGISTIC REGRESSION APPROACH
SENSITIVITY ANALYSIS FOR THE MATHEMATICAL MODELING OF MEASLES DISEASE INCORPORATING TEMPORARY PASSIVE IMMUNITY
TOPOLOGIES FOR PERMANENT MAGNET FLUX SWITCHING MOTORI OUT-RUNNER SEGMENTED ROTOR248
NEUTRON AND PHOTON SHIELDING PARAMETERS OF SOME HYDRIDES AND BOROHYDRIDES258
A UNIFORM ORDER CONTINUOUS HYBRID INTEGRATION FOR SOLVING THIRD ORDER ORDINARY DIFFRENTIAL EQUATIONS
MHD MIXED CONVECTION FLOW IN MELTING FROM A HEATED VERTICAL PLATE EMBEDDED IN POROUS MEDIUM

INFLUENCE OF ZERO-ORDER SOURCE AND DECAY COEFFICIENTS ON THE CONCENTRATION OF CONTAMINANTS IN TWO-DIMENSIONAL CONTAMINANT FLOW
VHF RADIOWAVE PROPAGATION MEASUREMENTS IN MINNA, NORTH CENTRAL NIGERIA
PROSPECTS AND CHALLENGES OF METAL CASTING TOWARDS ECONOMIC DEVELOPMENT IN NIGER STATE329
RAIN ATTENUATION PREDICTION FOR SATELLITE COMMUNICATION AT Ku-BAND IN NORTH CENTRAL NIGERIA
THE IMPACT OF SYSTEM PERTURBATION ON STABILIZATION OF THE GROWTH OF TWO POLITICL PARTIES353
COMPUTATIONAL ANALYSIS OF STABILIZATION OF A MATHEMATICAL MODEL OF TWO DOMINANT POLITICAL PARTIES IN A DEVELOPING DEMOCRACY
DELINEATING THE LINEAMENTS WITHIN THE MAJOR STRUCTURES AROUND EASTERN PART OF LOWER BENUE BASIN FROM 2009 AEROMAGNETIC DATA
OPTIMIZATION OF BIODIESEL PRODUCTION CATALYSED BY CALCIUM OXIDE OBTAINED FROM WASTE EGG SHELL USING SURFACE RESPONSE METHODOLOGY
LEARNING ABOUT R&D ORGANIZATIONS IN NIGERIA: PLACING THE RESEARCH OFFICER AT THE CENTRE OF INNOVATION EXPERIENCE
CONTAMINATION RISK ASSESSMENT OF PHYSICO-CHEMICAL AND HEAVY METAL DISTRIBUTION IN WATER AND SEDIMENTS OF NEW CALABAR RIVER, EASTERN NIGER DELTA, NIGERIA
HYDROGEOCHEMICAL INVESTIGATION OF SURFACE AND GROUNDWATER QUALITY AROUND ANGUWAN MAIGIRU MINING SITES, NIGER STATE, NORTHCENTRAL NIGERIA
MODELLING ECONOMIC GROWTH IN SUB-SAHARAN AFRICA: A PANEL DATA APPROACH
THE ALGEBRAIC STRUCTURE OF AN IMPLICIT RUNGE-KUTTA TYPE METHOD
CHARACTERIZATION AND ANTIBIOGRAM OF BACTERIA ISOLATED FROM SURGICAL WOUNDS OF PATIENTS ATTENDING IBRAHIM BADAMASI BABANGIDA SPECIALIST HOSPITAL MINNA, NIGER STATE
DETERMINATION OF DEPTH TO MAGNETIC SOURCE OVER PART OF MONGUNU AND ENVIRON USING SOURCE PARAMETER IMAGING FROM HIGH RESOLUTION AEROMAGNETIC DATA
STRUCTURAL AND THERMOLUMINESCENCE STUDIES OF EUROPIUM DOPED TRIPOTASSIUM SODIUM DISULPHATE
DISULPHATE
DISULPHATE468HUMAN ACTIVITIES AND NATURAL HAZARDS IN AREAS OF NORTHERN NIGERIA.477LITHOFACIES CHARACTERIZATION OF MIXED-AEOLIAN-FLUVIAL DEPOSITS: EXAMPLE FROM THE PERMO-TRIASSIC OF THE CHESHIRE BASIN, NE UNITED KINGDOM.489TOXICITIES OF DICHROSTACHYS CINEREA (L.) AGAINST ARTEMIA SALINA AS SOURCE OF TREATMENT OFSWELLINGS AND TUMOURS.500APPLICATION OF ENVIRONMENTAL ISOTOPES IN ELUCIDATING GROUNDWATER RECHARGE IN ABUJA, NORTH-CENTRAL NIGERIA506EFFECT OF SALT APPLICATIONS ON WATER ABSORPTION CAPACITY (WAC) OF MUSHROOM VARIETIESOBTAINED IN AKURE, NIGERIA.527INTEGRATED GEOSCIENCES PROSPECTING FOR GOLD MINERALIZATION IN KWAKUTI, NORTHERN NIGERIA557ENHANCING ECONOMIC PRODUCTIVITY OF UPLAND RICE IN EKITI STATE THROUGH A FREQUENCY SWEEP ANDMANUAL FREQUENCY-SELECT ULTRASONIC BIRD PEST CONTROL DEVICE.574A MATHEMATICAL MODEL OF YELLOW FEVER DISEASE DYNAMICS INCORPORATING SPECIAL SATURATIONINTERACTIONS FON TERRESTRIAL BROADCAST IN VHF BAND IN MINNA CITY, NIGER STATE, NIGERIA595INFLUENCE OF HOSPITAL INFORMATION MANAGEMENT SYSTEM ON PATIENT CARE MANAGEMENT IN RIFTVALLEY PROVINCIAL GENERAL HOSPITAL609SPECTRAL DEPTH ANALYSIS OF PARTS OF BIDA BASIN, NORTH CENTRAL NIGERIA, USING AEROMAGNETIC DATA
DISULPHATE

NIGER STATE, NIGERIA
AN OVERVIEW ON CU2ZNSNS4 - BASED THIN FILMS FOR SOLAR CELL APPLICATION
EFFECT OF IMPROVISED INSTRUCTIONAL MATERIALS ON PERFORMANCE OF SENIOR SECONDARY SCHOOL PHYSICS STUDENTS ON PROPERTIES OF WAVES IN SULEJA METROPOLIS OF NIGER STATE
PALEOENVIRONMENTAL AND PALEOCLIMATIC RECONSTRUCTION OF OM-4 AND OM-A WELLS, NIGER DELTA, NIGERIA
EFFECT OF SOME WEATHER ELEMENTS ON HUMAN THERMAL COMFORT IN BIDA, NIGER STATE, NIGERIA699
DUALITY OF A LINEAR PROGRAM715
MODELING AND ANALYTICAL SIMULATION OF TROPICAL FRUITS DRYING722
EFFECT OF GREEN SPACES ON URBAN HEAT DISTRIBUTION IN BWARI AND ABUJA MUNICIPAL AREA COUNCILS OF THE FEDERAL CAPITAL TERRITORY OF NIGERIA740
SIMULATION OF THE EFFECT OF PHYSICAL EXERCISE ON THE TEMPERATURE DISTRIBUTION IN THE PERIPHERAL REGIONS OF HUMAN LIMBS
STUDY OF THE THERMAL DEGRADATION PROFILE OF CHEMICALLY MODIFIED WOOD SAWDUST778
IN-VITRO ANTIBACTERIAL ACTIVITY – GUIDED ISOLATION AND CHACTERIZATION OF β-SITOSTEROL FROM THE MESOCARP OF THE FRUITS OF Diospyros mespiliformis
PEBBLE MORPHOMETRIC ANALYSIS AND DEPOSITIONAL ENVIRONMENT OF THE BASAL CONGLOMERATES OF BIDA SANDSTONE EXPOSED AROUND ZUNGERU, NW NIGERIA797
MODELING PLATINUM GROUP ELEMENTS (PGE) DEPLETION IN METAMORPHOSED ULTRAMAFIC ROCKS OF THE NYONG SERIES, SOUTHEAST CAMEROON
PRELIMINARY INVESTIGATION OF TOTAL ATMOSPHERIC DEPOSITS (TAD) IN AKURE, ONDO STATE, NIGERIA848
EFFECTS OF PIT LATRINES AND POOR DESIGN OF SANITARY FACILITIES ON GROUNDWATER QUALITY: A CASE STUDY OF MINNA AND BIDA, NORTH-CENTRAL NIGERIA
MODELING AND ANALYTICAL SIMULATION OF UNSTEADY HYDROMAGNETIC FREE CONVECTIVE FLOW PAST AN INFINITE VERTICAL PLATE IN POROUS MEDIUM
TIME SERIES ANALYSIS OF THE AVERAGE MONTHLY RELATIVE HUMITY IN BIDA, NIGER STATE
MODELLING MEAN SURFACE TEMPERATURE OF NIGERIA, USING GEOSTATISTICAL APPROACH
PHYSICOCHEMICAL PROPERTIES AND ANTIFUNGAL ACTIVITY OF ESSENTIAL OIL OF <i>LANTANA CAMARA</i> SEEDS FROM NIGERIA
KINETIC AND ISOTHERM STUDIES OF HOG PLUM SEED COAT POWDER AS AN ADSORBENT
RAIN-INDUCED ATTENUATION AT KU-BAND IN A TROPICAL REGION
SYSTEMATIC PALYNOLOGY OF MAIGANGA COAL FACIES, NORTHERN BENUE TROUGH, NIGERIA
ONODUKU, U. S
MODELLING AND ANALYTICAL SIMULATION OF DRYING BEHAVIOUR OF LEATHER
MUDASIRU O.D; ; OLAYIWOLA, R. O
ON THE APPLICATION OF OPTIMAL CONTROL IN A MILITARY ENVIRONMENT
DYNAMICS OF VEGETAL COVER AND URBANIZATION TREND IN JOS SOUTH LOCAL GOVERNMENT AREA OF PLATEAU STATE, NIGERIA A GEOSPATIAL APPROACH991
IMPACT OF URBANIZATION ON AGRICULTURAL LANDS IN LAFIA LOCAL GOVERNMENT AREA, NASARAWA STATE
MODELING AND ANALYTICAL SIMULATION OF OIL SHALE ARRHENIUS COMBUSTION

INTERNATIONAL PLANNING COMMITTEE

	Chemistry						
Prof. F. A. Adekola (PhD Analytical Chemistry) Department of Chemistry University of Ilorin, Nigeria Email: <u>fadekola@hotmail.co</u> <u>m</u>	Prof. J. N. Egila (Analytical/Environme ntal Chemistry) Department of Chemistry University of Jos, Nigeria	Prof. Dagne Ermias (Natural Product Chemistry) African Laboratory of Natural Products, Department of Chemistry University (Art Kilo), Ethiopia Email: edagne@gmail.com	Dr. Hasmerya Maroof Computational Chemistry/Chemometri cs, Department of Chemistry, University Teknologi Malaysia Email: hasmerya@kimia.fs.utm .my				
Prof. Mohamed Noor Hasan Chemoinformatics/Ch emometrics, Department of Chemistry, University Teknologi Malaysia Email: <u>mnoor@utm.my</u> , <u>mnoor@yahoo.com</u>	Dr. Nor Kartini Abu Bakar, Department of Chemistry, Faculty of Science, University of Malaya, Malaysia Email: <u>kartini@um.edu.my</u>	Dr. J. O. Jacob, Department of Chemistry, School of Physical Sciences, Federal University of Technology, Minna, Nigeria Email: john.jacob@futminna.e du.ng	Dr. Abdullahi Mann, Department of Chemistry, School of Physical Sciences, Federal University of Technology, Minna, Nigeria Email: abdumann@yahoo.com				
Dr Hairul Anuar Tajuddin, Dept. of Chemistry, University of Malaya, Malaysia <u>hairul@um.edu.my</u> <u>hairultajuddin@gma</u> <u>il.com</u>							
	Geog	graphy					
Prof. N.G. Nsofor Department of Geography Federal University of Technology Minna, Nigeria. Email: <u>nsoforng50@yahoo.co</u> <u>m</u>	Prof. Haruna Kuje Ayuba Department of Geography Nasarawa State University, Keffi PMB 1022Keffi, Nigeria. Email: hkayuba@yahoo.com	Prof. S. M. Hassan Department of Geography and Environmental Management University of Abuja, Nigeria. Email; <u>shuaibhassan123@gmai</u> <u>l.com</u>	Prof. A. I. Tanko Department of Geography Bayero University Kano, Nigeria Email; <u>aitanko.geog@buk.edu.</u> <u>ng</u>				
Dr. Paul Tengbe Department of Geography Furra Bay College, University of Sierra Leone, Freetown Email; <u>dr.paultengbe@yahoo.</u> <u>com</u>	Prof. Alessandra Giannini International institute of Climate and Society (IRI) The Earth Institute University of Colorado, USA Email; <u>Alesall@iri.columbia.e</u> <u>du</u>						

Mathematics						
Dr. Farhad Ali Fluid Dynamics, Heat and Mass Transfer, Department of Mathematics. City University of Science and Information Technology, Pashewar, Pakistan Email: <u>farhadali@cusit.edu.p</u> <u>k</u>	Prof. Frank Sottile, Department of Mathematics, Texas A and M University, College Station, TX 77843, USA Email: <u>sottile@math.tamu.edu</u>	Prof. Oluwole D. Makinde, Applied Mathematics Department, University of the North, South Africa Email: <u>dmakinde@yahoo.com</u> <u>makinded@sun.ac.za</u>	Dr. Patrick Oseleka EZEPUE Director of Research Innovation and Creativity, Hallam University, SheffieldS1 1WB, UK Email: p.ezepue@shu.ac.uk			
Dr. O. A. Ajala Department of pure and Applied Mathematics Ladoke Akintola University of Technology, Ogbomoso, Nigeria. E-mail: <u>oaajala@lautech.edu.n</u> g	Dr. A. J. Omowaye Department of Mathematics Federal University of Technology, Akure Nigeria E-mail: ajomowaye@futa.edu. ng omowaye_2004@yaho o.co.uk	Dr. Amos Popoola Department of Mathematics Osun State University, Osogbo, Nigeria E-mail: <u>amos.popoola@uniosun</u> .edu.ng	Prof. R. B. Adeniyi Numerical Analysis Department of Mathematics, University of Ilorin, Nigeria Email: raphade@unilorin.edu.n g			
	Materials Scier	nce/Nanoscience				
Professor Arunachala Kannan, Ira A. Fulton Schools of Engineering, The Polytechnic School PRLTA 335A, 7171 E Sonoran Arroyo Mall Arizona State University Mesa, AZ 85212; Email: <u>amk@asu.edu</u>	Dr. S. Ambali Department of Chemical Engineering, Federal University of Technology, Minna, Nigeria. Email: <u>kasaka2003@futminna.</u> <u>edu.ng</u>	Prof. A. S. Afolabi Department of Chemical and Metallurgical Engineering, Botswana University of Science and Tecgnology, Bostwana. Email: <u>afolabi@biust.ac.bw</u>	Dr, Nafarizal Bin Nayan, (nanoscience/nanotechn ology and electronics) Email: <u>nafa@uthm.edu.my</u> Shamsuddin Research Centre, Office for Research, Innovation, Commercialization and Consultation, Universiti Tun Hussein Onn Malaysia			
Prof. M. Aibinu, Department of Mechatronics, Federal University of Technology, Minna, Nigeria. Email: <u>maibinu@gmail.com</u>	Dr. Olayemi, Dept of Biology, F. U.T., Minna Email: <u>isreal.olayemi@futmin</u> <u>na.edu.ng</u>	Dr. Mohammed Saidu Dept. Civil Engineering Department of Mechatronics, Federal University of Technology, Minna, Nigeria Email: <u>mohammed_saidu@fut</u> <u>minna.edu.ng</u>				
	Ph	ysics				
Prof. Fabian Ezema Department of Physics,	Dr. Mayeen Uddin Kahandaker, Department of Physics,	Prof. A. O. Musa, Department of Physics, Bayero University, Kano, Nigeria	Prof. K. J. Oyewumi, Department of Physics, University of Ilorin, Nigeria Email:			

Fodoral University of	University f Molesse	Email:	kjoyewumi@unilorin.ed	
Federal University of Technology, Minna, Nigeria	University f Malaya, 50603, Kuala Lumpur, Email:	aomusa2011@gmail.co <u>m</u>	<u>kjoyewumi@unilorin.ed</u> <u>u.ng</u>	
	<u>mu_khandaker@um.ed</u> <u>u.my</u>		Dr. Uusaan Alana ka	
Dr. Muhammad Arif in AgamDr. OluwafemiDepartment of Physics,Stephen Ojambati Department of Science and Technology, Universiti TunHussian Oon Malaysia, Email: arif@uthm.edu.myUniversity of Twente, The Netherlands Email: o.s.ojambati@utwent e.ni		Dr. Zaidi Bin Embong, Department of Physics, Universiti Tun Hussian Oon Malaysia Malaysia Email: <u>zembong@gmail.com</u>	Dr. Umaru Ahmadu, Department of Physics, Federal University of Technology, Minna, Nigeria Email: <u>u.ahmadu@yahoo.com</u>	
Prof. E. E Udensi, Department of Physics, Federal University of Technology, Minna, Nigeria Email: eeudensi@yahoo.comDr. Nasir Naeem Department of Physics, University of Abuja, Abuja, Nigeria. Email: nassnaeem@gmail.co m		Prof. O. D Oyedum Department of Physics, Federal University of Technology, Minna, Nigeria Email: oyedidavid@futminna .edu.ngDr. Matthew T. Ko Department of Phy Federal University Technology, Minna, Nigeria Email: mat_479@yahoo.com		
Dr. Adetona Abbass Geophysics Department of Physics, Federal University of Technology, Minna, Nigeria Email: tonabass@gmail.com	Prof. SADIQ Umar, Nuclear Physics Department of Physics, Ahmadu Bello University, Zaria, Nigeria Email: <u>sadiqumarx@yahoo.co.</u> <u>uk</u>	Prof. V. Chukwuma, Atmospheric Physics Department of Physics, University of Ilorin, Nigeria Email: <u>victorchukwuma@yah</u> <u>oo.com</u>	Dr. Ibrahim Aku Department of Physics, Federal University of Technology, Minna, Nigeria <u>ibrahimaku@futminna.e</u> <u>du.ng</u>	
	Sta	tistics		
Prof. Benjamin Agboola Oyejola Professor of Statistics (Biometry, Applied Statistics, Experimental Design and Econometrics) Department of Statistics University of Ilorin, Ilorin, Nigeria. Email: boyejola@unilorin.e	Prof. E.O. Asiribo Professor of Statistics (Biostatistics, Experimental Design and Time Series) Department of Statistics Federal University of Agriculture Abeokuta, Nigeria Email: asiribo@yahoo.com	Prof. Shehu Usman Gulumbe Professor of Statistics (Multivariate Statistics and Repeated Measures) Department of Mathematics Federal University Birin Kebbi Kebbi State, Nigeria. Email: <u>shehu.gulumbe@fubk.e</u>	Dr. I. U. Shittu Associate Professor of Statistics (Time Series, Probability and Stochastic processes) Department of Statistics, Federal University of Technology, Minna, Nigeria. Email: <u>shittu.olanrewaju@gma</u> <u>il.com</u> , oi.shittu@ui.edu.ng	

and boyejola2003@yahoo .com			
Dr. A. Isah Associate Professor of Statistics (Spatial Statistics, Probability theory, and Sample Survey) Department of Statistics, Federal University of Technology, Minna, Nigeria. Email: aish@futminna.edu.ng	Dr. Alexander Hapfelmeier <i>Ph.D.</i> Institut Fur Medizinsche Statistik UndEpidemiologe Technical University of Munich Klinikum rechts derIsar Ismaninger Str. 22. Email: <u>alexander.hapfelmeier</u> <u>@tum.de</u> .		
	Ge	ology	1
Dr. U. S. Onoduku, Department of Geology, Federal University of Technology, Minna, Nigeria, onoduku.usman@fut minna.edu	Prof. Wan Hasia Abdullahi, Department of Geology, University of Malaysia, Malaysia, wanhasia@um.edu.my	 3. Dr. Idris-Nda Abdullahi, Department of Geology, Federal University of Technology, Minna, Nigeria, 08036273815, idrisnda@futminna.edu. ng 	Prof. Okosun Edward Agboneni, Department of Geology, Federal University of Technology, Minna, Nigeria, eaokosun@yahoo.com
Dr. Waziri M. N., Department of Geology, Federal University of Technology, Minna, Nigeria <u>nuhuwaziri@futmin</u> na.edu.ng		Dr. Agyingi Christopher, PhD (Associate Professor of Sedimentology and Petroleum Geology) Department of Geology, University of Buea, Cameroon Tel: +237677875030 Email: agyingi@ubuea.cm and cm_agyingi@yahoo.c o.uk	Cheo Emmanuel Suh, PhD (Professor of Economic Geology and Microtectonics) Department of Geology, University of Buea, Cameroon <u>Tel: +237</u> 677292940 Email: <u>chuhma@yahoo.com</u>
Dr. Isah Goro Aliyu, Department of Geology, Federal University of Technology, Minna, Nigeria, <u>isahgoro@futminna.e</u> <u>du.ng</u>	Dr. Ako Thomas Agbor, Department of Geology, Federal University of Technology, Minna, Nigeria <u>akoagbor@futminna.ed</u> <u>u.ng</u>		

LOCAL ORGANISING COMMITTEE

Dr. Kasim Uthman Isah (Chairman)

Dr. Abubakar Usman (Secretary)

Dr. Shehu Usman Onodoku

Dr. Mairo Muhammed

Dr. Umaru Mohammed

Mr. Elijah Yanda Shaba

TECHNICAL COMMITTEE

Dr. Adamu Alhaji Mohammed (**Chairman**) Dr. T. A. Ako

> Dr. T. O. Jimoh Mr. Bello Adeshina

Mr. Salihu Saidu

Miss. Eichie Julia Ofure (Secretary)

LOGISTICS COMMITTEE

U. S. Onoduku (**Chairman**) Dr. A. A. Rafiu Dr. Samshideen Ajoye Dr. J. O Jacob Dr. (Mrs) S. H. Waziri Dr. U. Mohammed Mr. I. S. Onotu Mr. S. E Abdulkabir (**Secretary**)

KEYNOTE SPEAKERS



Prof. Kenneth Ozoemena

Prof. Kenneth Ozoemena obtained his PhD degree in Chemistry in 2003 at Rhodes University, after which he completed postgraduate qualifications in Management Development (MDP), as well as in Higher Education (PGCHE) at the University of Pretoria. He is an Extraordinary Professor at the University of the Western Cape and was a Principal Researcher and Research Group Leader of the Electrochemical Energy Technologies at the CSIR Materials Science and Manufacturing Division. He recently joined School of Chemistry of the University of the Witwatersrand as Professor of Materials for Energy & Electrochemistry,

His research is highly interdisciplinary, spanning several areas of Materials Science and Electrochemistry. By February 2014, he had published 125 articles in leading scientific journals (such as *ChemComm, J Mater Chem, Energy Environ Sci, PCCP, ACS Appl Mater Interfaces, Langmuir, Electrochem Commun,* and *Electrochim Acta*) as well as six book chapters. He has been cited 2 674 times and holds an H-index of 30 and i10-index of 74. Ozoemena is listed amongst the world's top 1% of chemists by the Thomson Reuters' Web of Knowledge. He is a Fellow of the Royal Society of Chemistry (FRSC) (UK) and a Chartered Chemist (CChem) of the Royal Society of Chemistry (UK). He is a member of the editorial board of several scientific journals, (including *Electrochemistry Communications*), as well as Associate Editor of *Materials Focus*, and served as Guest Editor of *Electrochemical Acta* and *Journal of Porphyrins and Phthalocyanines*.



Professor Cheo, Emmanuel Suh

Professor Cheo, Emmanuel Suh was born on the first of July, 1969 in Mankanikong in the North West Region of Cameroon. He attended Obafemi Awolowo University, Ile Ife, Nigeria from 1987 – 1990 were he obtained a Bachelor of Science (B.Sc) first class degree in Geology. He also obtained a Master of Science (M.Sc) degree from the same University in 1992. Prof. Cheo Emmanuel Suh obtained his PhD degree in Applied Geology in 1997 at Abubakar Tafawa University, Buachi, Nigeria in collaboration with Technical University of Berlin, Germany. He also had post-doctoral fellowships in the following institutions:

1. 2001 – Royal Society at the University of Bristol, UK

2. 2002 – Alexander Von Humboldt Foundation, Technical University of Clausthal, Germany

3. 2004 – Smithsonian Institution, Museum of National History, Mineral Science Department, Washington DC, USA.

He has consulted as an economic geologist for gold, iron ore and uranium deposits for Legend Mining, Australia, African Aura Resources, UK, Cameroon Mining Company and Cameroon Mining Action. He attended the Mining Indaba in Cape Town in February, 2012 where the Iron Resources in Cameroon and Central African sub-region were discussed. In August of the same year, he also participated in a training workshop on Sustainable Mining in Africa at Brisbane, Australia. He has won many grants, attended many conferences and published many articles in both local and international journals. He is a scientific member of so many geological associations.

EFFECT OF GREEN SPACES ON URBAN HEAT DISTRIBUTION IN BWARI AND ABUJA MUNICIPAL AREA COUNCILS OF THE FEDERAL CAPITAL TERRITORY OF NIGERIA

Odekunle M. O.^{1*}, Olusegun S. S.¹, Adenle A. A¹, Ojoye S.¹, Sule I.¹and Saidu S¹ ¹Department of Geography, Federal University of Technology, Minna, Nigeria ¹<u>odemary@futminna.edu.ng</u>; +2348035957159 *Corresponding author

ABSTRACT

Urban Heat Distribution (UHD) is considered as one of the major problems in the 21st century posed to human beings as a result of industrialization and urbanization, though they tend to improve our material lives and comfort in some ways. Urbanization has resulted in alterations in spatial patterns of urban land use/land cover change; leading to decreases in green spaces. It is necessary to assess the role of green spaces on heat distribution in fast growing cities like Abuja. Developed countries have invested huge resources in developing green spaces as part of the best practices in mitigating urban heat, purifying the air, among others. This study analyzed the effects of green spaces in urban heat distribution (UHD) in FCT, Abuja, Nigeria. The urban temperature was estimated from Landsat Operational Land Imager (OLI) 2015 imagery and in situ data. ArcGIS 10.3 was used to generate Normalized Difference Vegetation Index (NDVI) and thermal maps of the study area. Results from the analysis of the thermal band of the satellite images and the *in situ* data revealed that differences in vegetation distribution caused differences in temperature variation. The ratio of temperature between urban heat area and green space areas increased rapidly with increasing distances from the green space boundaries. A comparison of temperature of some selected green areas and non-green areas showed marked differences. The three arms zone, a non-green area had a temperature4.2°C higher than National Arboretum, a green area. Louga Road (non-green area) had a temperature 4.47°C higher than Lobito Crescent Park. Thus green areas had relatively lower temperatures than built up areas and bare sources. This shows the important role played by green spaces in mitigating urban heat in urban central areas. The study also utilized Effective Temperature (ET) in calculating the Human Thermal Comfort Index in the study area to further buttress the mitigating effects of green spaces on urban heat distribution.

Keywords: Green Spaces, Urban Heat Distribution, Effect, Effective Temperature

1.0 Introduction

Increased replacement of the natural green area with urbanised areas has led to significant changes in the local weather conditions. Due to the economic demands, urban populations are constantly growing in size and complexity because more people are migrating from the rural areas to the urban centres. Earlier studies by Akbari (2011), Elsayed (2009), Giannaros and Melas (2012), Senanayake*et al.* (2004) have revealed that the temperature distribution in the urban areas is notably higher than its neighbouring suburban areas. The human induced heat released from vehicles, power plants, air conditioners and other heat sources, dramatic removal of the vegetation cover and increasing of impervious surfaces are major contributors to the formation of Urban Heat Distribution (UHD) (Memon*et al.*, 2008 and Senanayake*et al.*, 2013).

The concept of including green spaces in urban planning is an important feature in the history of urban planning (MacHarg, 1971). Proper understanding of urban heat distribution is important for a variety of reasons. The

radiation absorbed warms the ambient air; increasing the low level stability and consequently preventing the pollution dispersal which results in an increase in pollution concentration. The urban heat distribution adds to the development and self-sustenance of a 'dust-dome' and a 'haze hood' of contaminating particles. It also results in setting up the recirculation of pollutants thus making the pollution problems more serious. With the increasing emphasis on planning for healthier and comfortable physical environments in cities, the need to recognise the role of cities in contributing to and meeting the challenges posed by climate change has become greater. The very presence of a city affects the local climate and as the city changes, so does, its climate. The modified climate adds to the city residents' discomfort and even ill-health (Devi, 2003).

Studies on adequate environmental preferences specifically this kind on the green space interaction with heat distribution are largely conducted in developed countries, but rarely in developing countries. Thus, the main goal of this paper is to understand the effect of urban green spaces on urban heat distribution in developing Nigeria, taking the city of Abuja as a case study. In a capital city, like Abuja, vegetation is crucial for reducing heat islands and creating shade. The benefits are more obvious when trees are abundant and when their canopies are large. It is believed that in Abuja, the temperature on the environment will not be so high if there are patches of trees that are abundant and large. Also, it has been noted that connected and complex shapes of tree canopy are usually perceived as natural landscapes (Lee *et al.*, 2008). These structures are often favoured because they create the feeling of being close to nature and away from the built environment, and thus bring a restorative experience. The study focuses on determining the effect of green spaces on urban heat distribution in the city of Abuja, Nigeria, taking into cognisance the importance of green spaces, and the effect of urban heat distribution effect from Green spaces and non-green from satellite images (2)compare heat distribution effect from Green spaces and non-green from Field survey (3) examine the effects of the heat generated the likely comfort of the area.

1.1 Study Area

Abuja is the capital city of Nigeria; it is located in the centre of Nigeria, within the Federal Capital Territory (FCT). The study area covers 275 sq miles (713KM²), with a population density of 1,235,880 and lies on latitude $8^0 25$ 'N & $9^0 25$ 'N and longitude $6^0 45$ 'E & $7^0 45$ 'E(Figure 1). Abuja is a planned city, and was built mainly in the 1980s. It officially became Nigeria's capital on 12 December 1991, replacing Lagos, though Lagos remains the country's most populous city. Abuja's geography is defined by Aso Rock, a 400-metre monolith left by water erosion. The Presidential Complex, National Assembly, Supreme Court and much of the city extend to the south of the rock. Zuma Rock, a 792-metre monolith, lies just north of the city on the road to Kaduna State.

Abuja, under Köppen climate classification features a tropical wet and dry climate. The FCT experiences three weather conditions annually. This includes a warm, humid rainy season and a blistering dry season. In between the two, there is a brief interlude of harmattan occasioned by the northeast trade wind, with the main feature of dust haze and dryness. The rainy season begins from April and ends in October, when daytime temperatures reach 28 °C (82.4 °F) to 30 °C (86.0 °F) and nighttimes low hover around 22°C (71.6 °F) to 23 °C (73.4 °F). In the dry season, daytime temperatures can soar as high as 40 °C (104.0 °F) and night-time temperatures can dip to 12 °C (53.6 °F). Even the chilliest nights can be followed by daytime temperatures well above 30 °C (86.0 °F). The high altitudes and undulating terrain of the FCT act as a moderating influence on the weather of the territory. Rainfall in the FCT reflects the territory's location on the windward side of the Jos Plateau and the zone of rising air masses with the city receiving frequent rainfall during the rainy season from March to November every year.

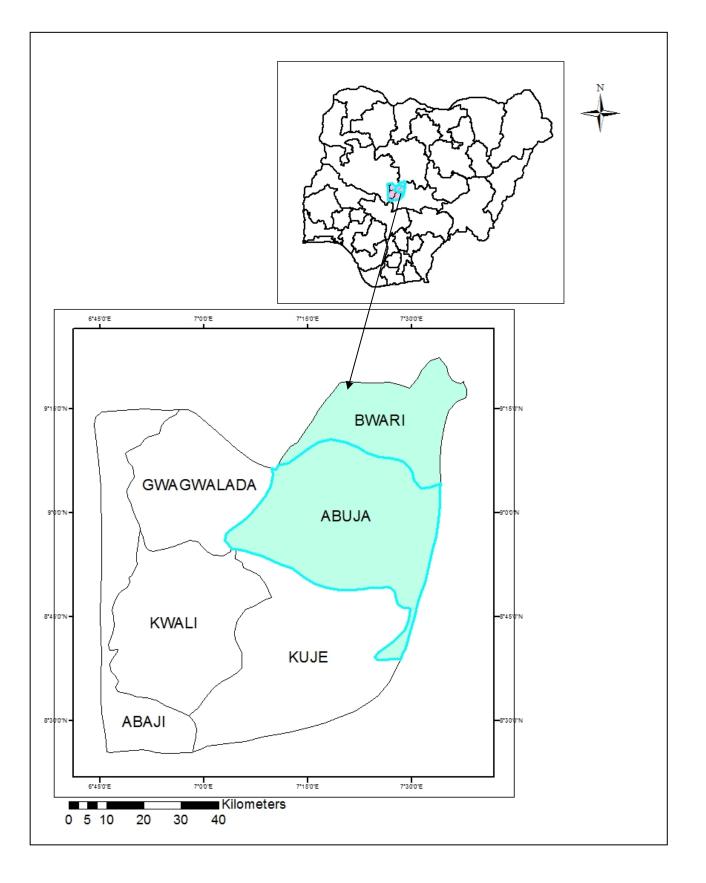


Figure1 Nigeria showing the Study Area Compilation (2017) Source: Author's

2.0 Literature Review

2.1 Urban Heat Distribution

Adinna*et al.* (2009) evaluated the impact of urban heat island effect in the Enugu city of Nigeria and suggested adaptive measures to keep the UHD under control in the city. The study concluded that the use of high dense green vegetation, low absorptive roofing materials and lightening of pavement materials can reduce the effect in Enugu urban settlement. Akbari*et al.* (2001) studied the effect of cool surfaces and trees shades on the UHD. The findings revealed that surfaces with great albedo and urban trees can significantly reverse the heat islands. Tthe cost reduction due to the mitigating measures of UHD was also calculated in the studies. According to Akbari*et al.* (2001), for every 1°C increase in temperature, the electricity demand may rise by 2-4%. On the other hand, 20% energy used for air conditioning can be saved if mitigation measures are put in place in order to reduce the UHD. Yamamoto (2006) described several mitigation measures for UHD and also gave a description about some mitigation projects in Japan and other countries including the wind paths in Freiburg in Germany and recommended some key mitigation measures such as energy saving buildings and traffic systems, restoring green areas in urban areas and improvement of urban airflow.

2.2 Urban Green Space

Urban forests and trees contribute to a better quality of living environment in cities, for example by improving air quality and consequently the health of urban residents. Using a cross-sectional study design, De Vries*et al.* (2003) tested the hypothesis that people in green areas are healthier than people living in less green areas. The work combined Dutch data on the self-reported health of 17,000 people with land use data on the amount of green space in their living environments. The statistical examination controlled for confounding factors such as age, sex, and socio-economic status. The authors concluded that those living in a greener environment were positively related to all three available health indicators and the association was stronger for housewives and older people. The three health indicators considered by De Vries (2000).were: number of health problems experienced in the previous 14 days; perceived general health measured on a five point scale; and the score on the Dutch version on the General Health Questionnaire.

Currently, vegetal cover removal is one of the most alarming global development challenges. Specifically, it is the most serious long-term environmental issue affecting the world and Nigeria is not left out. Historically, the critical long term development challenge at the attainment of independence in 1960 was how to grow rapidly from a predominantly primary production based economy to an industrialized one with strong intersectorial links. The high hopes regarding the possibility of an appreciable progress towards getting self-sustained and rapidly industrialized within a generation or two was heightened by the emergence of the unprecedented large foreign exchange earnings from crude oil and gas exports. But after over four decades, this dream has remained largely unfulfilled in spite of all the development initiatives.

3.0 MATERIALS AND METHODS

3.1 Data

Moderate resolution multispectral and multi-temporal Enhanced Thematic Mapper Plus (ETM+) imageries of Landsatfor the year 2015 covering Abuja was obtained from path 189 and row 54 were downloaded from Global Visualization site. It was used to identify the Green Spaces and Heat Distribution in Abuja and its

environs. The image was used as a guide to identify the sampling points. Twenty-two (22) points were picked within the study area as sampled location for micro temperature data of all the points which form the primary data source used. Their respective locations, relative humidity, wind speed and temperature data were gathered using GPS, hand held thermometer, wind meter and humidity meter. The points were divided into two (2), eleven (11) of which are areas with green spaces and the other eleven(11) are areas without green spaces. Google earth image of the study area was also acquired.

3.2 Methods of Data Analysis

3.2.1 Micro Temperature Data Analysis (from Field work)

A portion was extracted from study area map for more detail study. From the extracted portion, figure 5 represents the NDVI map of the area while figure 6 represents the thermal map of the same area. Samples of different points were taken from both extracted maps based on two criteria as follows:

- i. Built-up areas and bare ground (represented by alphabets a-k)
- ii. Vegetated (green) spaces (represented by numbers 1-11)

The green spaces are represented by numbers 1-11 on the satellite images and shown on table 4.1 together with their absolute locations, relative humidity, wind speed and temperature; while the built-up/ bare ground areas indicated with alphabets (a-k). The details can be found on tables 4.1 and 4.2. This was necessary to compare the effect of vegetation/green spaces on heat distribution in the study area from field work as the same time estimate the thermal comfort of the area (Blazejczyk*et al.*, 2012)

After collecting the micro temperature data of the twenty two (22) locations, the data collected was tabulated and comparisons were made; some analogies were inferred and used in analysing the tabulated data. The result of the analysis was presented through simple line graphs and histograms with analysing comments. Also the micro temperature data from the locations were used to calculate the Human thermal comfort index of which the value accepted as a suitable comfort index for maximum comfort is (-0.5 to 0.5).

3.2.2 Creation of NDVI Map

Normalised Difference Vegetation Index (NDVI) is an index describing vegetation by showing the difference between near-infrared, which is strongly reflected by vegetation and red light which is absorbed by vegetation. The NDVI map was created in ArcGIS 10.2 environment using the Landsat ETM+ Imageries. Healthy vegetation (chlorophyll) reflects more near-infrared (NIR) and green light compared to other wavelengths and it absorbs more red and blue light. This was why NDVI map was chosen for this study because it uses NIR and Red channels to measure healthy vegetation and identify the locations of green spaces in Abuja and its environs.

The formula for calculating NDVI is:

NDVI = NIR – red(i)

3.2.3 Creation of Thermal Map

Heat map also referred to as thermal map of Abuja was created using ArcGIS 10.3. Thermal map is necessary

for identifying the heat distribution in Abuja and its environs. The thermal map was generated using the thermal bands of Landsat Operational Land Imager (OLI) and the NDVI of the study area was calculated. The first step taken was to convert the Digital Numbers (DN) on the imageries to Radiance values using the formula

	L_{λ}	=	$M_L Q_{cal} + A_L \dots (ii)$
where			
Lλ		=	TOA Spectral Radiance (Watts/(m2 * srad *))
$M_{\rm L}$		=	Band-specific multiplicative recalling factors from the metadata
		(RADI	ANCE_MULT_BAND_x, where x is the band number)
A_{L}		=	Band-specific additive recalling factors from the metadata
		(RADI	ANCE_MULT_BAND_x, where x is the band number)
Q _{cal}		=	Quantized and calibrated standard product pixelvalues (DN)

The Radiance calculated above was then used to generate the Satellite Brightness Temperature with the following formula

<u>— K₂</u>	(iii)
= <u>K</u> 1	× /

 $K_2 = Band-specific thermal conversion constant from the metadata (K2_CONSTANT_BAND_x, where x is the band number, 10)$

But this gives the temperature on the satellite whereas land surface temperature was needed which lead to step the third step calculated using the following formula:

Land Surface Temperature = BT/1 + w * (BT/p) * in(e))

Where

BT

At Satellite Temperature

w = wavelength of emitted radiance $(11.5\mu m)$

p = $h * c/s (1.438 * 10^{-2} m K)$

т

h = Planck's constant ($6.626 * 10^{-34}$ Js)

s = Boltzmann constant $(1.38 * 10^{-23} \text{ J/K})$

c = Velocity of light $(2.998 * 10^{8} \text{ m/s})$

With these processes, the thermal map for Abuja City and its environs was generated so as to know the Heat Distributions in the area.

3.2.4 Thermal Comfort Index

To assess the thermal exposure of the human body, the integral effects of all thermal parameters must be taken into account. To this end, sophisticated bio meteorological indices are available to assess thermal comfort. Examples include the predicted mean vote (PMV), the physiologically equivalent temperature (PET), and the universal thermal comfort index (UTCI), which are based upon models for the human heat budget. Such models use all relevant meteorological parameters as well as physiological factors as input (Fiala*et al.*, 2012) More so, Blazejczyk*et al.* (2012) compared several of the thermal comfort estimates from the simple empirical indices with the UTCI. This index has been proposed for use as the standard model to assess human thermal

comfort, and is one of the indices based on a fairly complete description of the human energy balance. It was found that the so-called ET can be regarded as a reasonable proxy for the much more sophisticated UTCI. ET is computed from air temperature, water vapour pressure and wind speed, and these are generally available from meteorological observations. The findings of Blazejczyk*et al.* (2012) were confirmed in an independent analysis based on data from the Dutch city of Rotterdam (Stewart *et al.*, 2012).

Based on the results from the Field survey, ET was used as a thermal comfort index that was considered an alternative exposure indicator. ET was estimated as follows according to (Blazejczyk*et al.*, 2012):

.....(iv)

Where	37 –	$\frac{\frac{37-T_{air}}{0.68-0.014RH+\frac{1}{1.76+1.4w_s^{0.75}}}-0.29T_{air}(1-0.01RH)$
Tair	=	air temperature (°C)
RH	=	the relative humidity of the air (%)
W	=	the average wind speed (m/s).

The ET threshold used to count occurrences of thermal discomfort is shown in Table 1. This table has been used to relate thermal comfort to ET in West Africa (Blazejczyk*et al.*, 2012). The situation where value ET ranges between 31-37 °C, conditions are generally perceived as 'warm', which corresponds to strong heat stress in other indices. Hence the number of zones where the maximum ET exceeds 31°C was counted. The perception of heat has typically been derived for daytime conditions.

ET RANGE (⁰ C)	THERMAL COMFORT CLASS
>37	Hot
31-37	Warm
27-31	Comfortable
21-27	Fresh
17-21	Cool
11-17	Cold
1-11	Very cold

Table 1: Effective Temperature Rating Table

Note: ET values are different form air temperature values Source: Blazejczyket al., 2012

4.0 **Results and Discussion**

4.1 Green spaces and heat distribution effect from satellite image comparison

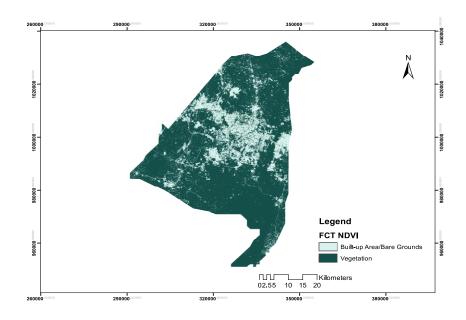


Figure 2: NDVI of the Area (FCT) in 2015 distinguishing Vegetation from built-up/bare ground

Source: Author (2016)

The major vegetation distribution of study area (FCT) Nigeria is shown on figure 2, the image showcases the various green spaces and built up area/bare ground available in the area from which the twenty-two sampled locations were picked and mapped. The dark green represent the green spaces in the area while the white bluish colour is the built up/ bare ground surface of the study area. It was seen that the dark green colour area are more that the built up/bare ground. They are equally found to be more dormant around the built up/bare ground of the study area. (Figure 2)

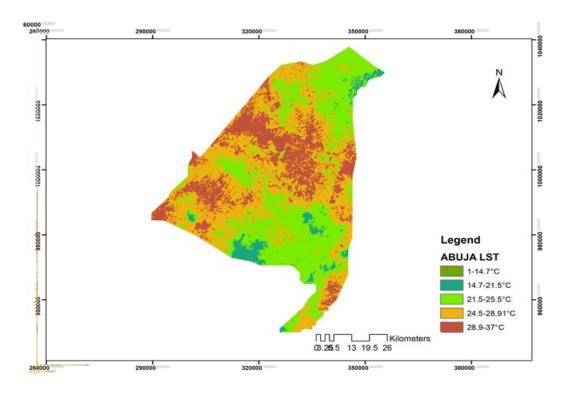


Figure 3: Temperature distribution of the area in 2015 Source: Author (2016)

The major heat distribution of the area is shown on Figure 3, the image showcases the various heat distribution of the study area which correlates with the sampled areas visited during the field survey. From Figure 3, Five (5) different ranges of heat were identified. The lowest temperature range was between 1°c to 14.7 °C, which was not too pronounced in the map of heat distribution. This less visibility of this temperate range implies there are no low temperature distributions over the area. The second and third temperature ranges are between 14.7°C to 21.5°C and 21.50°C and 25.5°C respectively. These temperature classes are visible at areas at location far away from the centre of the city they represent suburban areas. The moderate temperature ranges these classes connotes that places further away from the city centre have lesser temperature compared with the main city. Temperature ranges, 25.5°C and 28.9°C and 28.9°C and 37.5°C respectively are more dormant at the point representing built up and bare ground surface in Figure 2 which represent the centre of the city the densely urbanized part of the study area. The Google earth image of the area (figure 4) depicts a portion of the built-up/bare ground and vegetation distribution of the area in 2016. Supporting the various effects of green spaces on heat distribution from satellite image comparison.

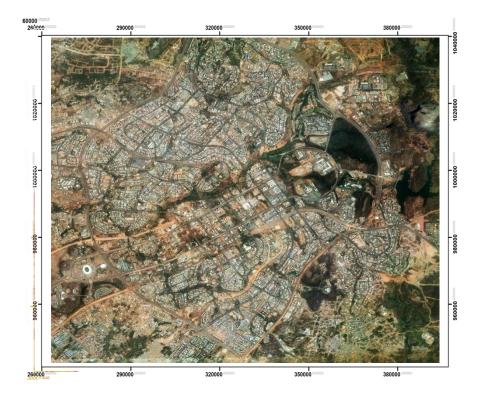


Figure 4:

QuickBird image of FCT in 2016

Source:

Google Earth 2016

4.2 Green spaces and heat distribution effect from micro field work comparison

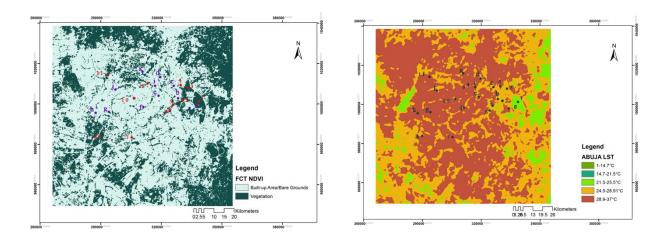


Figure 5: NDVI of an extracted area from Study Area

Figure 6: Temperature Distribution of an extracted area from Study Area

Source: Author's field work, 2016

As shown Figures 5 and 6; Tables 2 and 3, it was clear that the sampled green spaces have lower temperature reading than non-green space found in the study area. Comparing points (a) and (1) it was discovered that the temperature readings of point (a) 23.13°C (non-green space, Three arms zone) is 4.2°C higher than that of point (1) at 18.93°C(green space, National Arboretum) . In the same vein, point (e) at 26.67°C (non-green space, Louga road) is 4.47°C higher than point (5) at 22.20°C (green space, Lobito crescent park). Point (k) 24.12°C (non-green space, Tapeta Street) is 2.14°C higher than that of point (11) at 21.9°C(green space, City Park). Details of other the temperature readings comparison between greens pace and non-green are shown see (Tables 2 and Table 3). On a general note, one can conclude that non green spaces mainly which comprises of built up and bare ground generate more heat than green spaces.

S/N	Green Areas	Coordinates		Rel.	Wind	Temp
		Latitude	Longitude	Humidity (%)	Speed	(°C)
1	National Arboretum	9.087778	7.517747	89	3.4	18.93
2	Millennium park	9.070692	7.498844	82	3.5	19.23

3	IBB Golf Club	9.085819	7.506431	80	3.1	21.89	
4	Maitamaneighbourhood park	9.085492	7.500022	79	2.9	22.10	
5	Lobito crescent park	9.070408	7.4948	81	3.1	22.20	
6	Durban street neighbourhood park	9.063008	7.438036	81	3.0	19.67	
7	Abuja national stadium area	9.029297	7.452111	86	2.8	18.62	
8	Nigeria army cemetery	9.026472	7.464519	80	3.2	21.45	
9	Wuse rock park	9.069172	7.463728	78	2.8	22.12	
10	Julius Berger neighbourhood park	9.068192	7.453742	79	2.5	22.06	
11	City Park	9.077469	7.475753	79	2.6	21.98	

Table 2 Green Areas with the relative temperatures and coordinates

Source: Author (2016)

Table 3 Built-UpAreas/Bare Ground with the relative temperatures and coordinates

	Non green areas	Coo	Coordinates Rel.		Wind speed	Temp
		Latitude	Longitudes	Humidity (%)		(°C)
a	Three arms zone	9.066882	7.509857	75	2.5	23.13
b	Usuma street	9.074694	7.497720	76	2.4	22.89
c	Gana street	9.082284	7.498510	74	2.8	24.67
d	Pope John Paul II street	9.084111	7.494939	77	2.3	25.88
e	Louga road	9.073974	7.488556	73	2.2	26.67
f	4u supermarket	9.072122	7.484564	75	2.7	24.12
g	IdrisGidado street	9.048381	7.445309	76	2.4	24.55

Wuye	9.043536	7.440944	73	2.1	27.2
Madiana close	9.074827	7.470066	75	2.4	25.98
Yaounde street	9.074695	7.456771	73	2.5	26.8
Tapeta Street	9.077160	7.482543	74	2.2	24.12
	Madiana close Yaounde street	Madiana close9.074827Yaounde street9.074695	Madiana close9.0748277.470066Yaounde street9.0746957.456771	Madiana close9.0748277.47006675Yaounde street9.0746957.45677173	Madiana close9.0748277.470066752.4Yaounde street9.0746957.456771732.5

Source: Author's field work, 2016

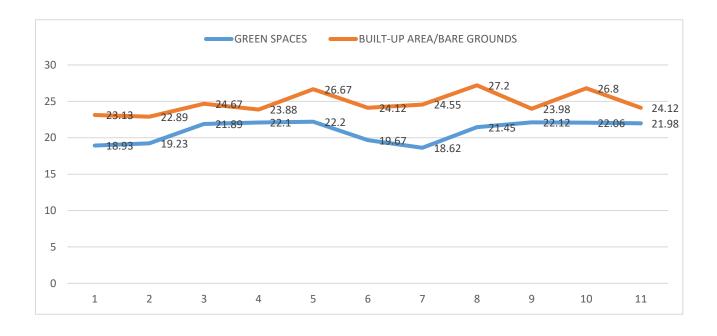


Figure 7 Temperature Graph showing readings from green spaces and Built-up Areas/Bare Grounds (Non green Spaces). Source: Author (2016)

Figure 7 show a clear indication of lower temperature from the line graph in green spaces as compared to Non Green spaces such as the built-up/bare ground areas. The gap between the lines is an indicator of the temperature difference between them. The wider the gap, the more the temperature difference, and the smaller the gap, the less the temperature difference between these points. Figure 7 depicting the temperature gap, proves that non green spaces have effect on temperature /heat distribution.

4.3 Thermal Comfort Index

Location	Efficient temperature (ET)	Thermal comfort index
National Arboretum	31.39	0.39
Millennium park	31.38	0.38
IBB Golf Club	31.59	0.59
Maitama neighbourhood park	31.46	0.46
Lobito crescent park	31.71	0.71
Durban street neighbourhood park	31.08	0.08
Abuja national stadium area	30.83	-0.16
Nigeria army cemetery	31.56	0.56
Wuse rock park	31.35	0.35
Julius Berger neighbourhood park	31.15	0.15
City Park	31.2	0.21

Table 4 Thermal Comfort results for the selected green spaces.

Source: Authors (2016)

The Thermal comfort Indices of the selected green spaces are shown on tables 4. The highest comfort is experience at Lobito Crescent Park with 0.71 index value. IBB Golf Club, Nigeria army cemetery and Maitama Neighbourhood Park also have fairly high thermal comfort index of 0.59, 0.56 and 0.46 respectively while National Arboretum and Millennium parks also have thermal indices of 0.39 and 0.38 values. These identified areas have a thermal comfort class between warm and hot because of their high ET and thermal index. Other areas like Julius Berger neighbourhood park, City Park and Durban street neighbourhood park as well as Abuja national stadium area have extremely low 0.21,0.15, 0.08, -0.16 respectively. These areas have a thermal comfort class between of their low ET and thermal index.

Location	Efficient temperature (et	Thermal comfort index	
	- ·	- 	
Three arms zone	31.22	0.21	
Usuma street	31.13	0.13	
Gana street	31.68	0.68	
Pope john paul ii street	31.83	0.83	
Louga road	31.71	0.70	
4u supermarket	31.57	0.56	
IdrisGidado street	31.52	0.52	
Wuye	31.77	0.77	
Madiana close	31.79	0.79	
Yaounde street	31.91	0.90	
Tapeta Street	31.51	0.51	
		<u> </u>	

Table 5 Thermal Comfort results for the selected non green spaces (Built-up Areas/Bare Grounds).

Source: Authors (2016)

The Thermal comfort Indices for non-green space (Built-up/Bare ground areas) is shown table5. The highest comfort is experience by virtually all the selected areas with the exception of three arms zone and UsumaStreet having low thermal comfort index of 0.21 and 0.31 respectively. The areas with high values is expected to have a thermal comfort class between warm and hot because of their high ET and thermal index while areas with low values will have a thermal comfort class between cool and cold. The summary of the

Thermal Comfort Indices (Green Spaces)	Thermal Comfort Indices Diff (Built-up/Bare Ground)
0.39	0.21
0.38	0.13
0.59	0.68
0.46	0.83
0.71	0.70
0.08	0.56
-0.16	0.52
0.56	0.77
0.35	0.79
0.15	0.90
0.21	0.51
	Source: Authors (2016
KEY	
Within AddeptageatRenge	
Ideal Out of acceptable range	

Table 6 Thermal Comfort indices for both Green Spaces and non-green spaces (Built-up Area/Bare Grounds)

Table 6 shows the results obtained from the calculated thermal comfort indices based on the formula earlier mentioned under methodology. The table was colour coded to show the points that comply with the ET (Efficient Temperature) value needed and the ones that do not comply divided into four ranges starting with places within acceptable range, ideal, manageable and places termed as out of acceptable range.

For Green Spaces(Table 6),National Arboretum, Millennium park and Wuse rock park have within the acceptable thermal comfort indices, while Maitamaneighbourhood park,Durban street neighbourhood park, Abuja national stadium area and Julius Berger neighbourhood park as well as City Park recorded an ideal thermal comfort index. While IBB Golf Club and Lobito Crescent Park have manageable thermal comfort index range but Lobito Crescent Park has a thermal index outside the acceptable index. For non-Green spaces(Table 6),,three arms zone,andUsumaStreet have an ideal thermal comfort index;4u supermarket, IdrisGidado street and Tapeta Street have a manageable thermal comfort index; while other areas have thermal index exceeding the acceptable range.

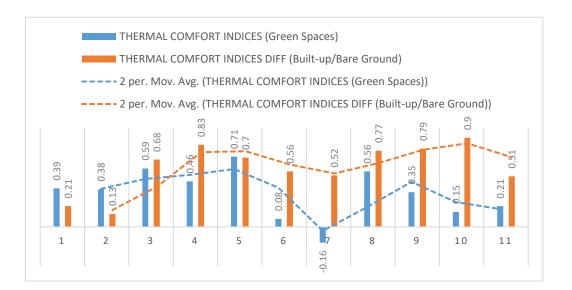


Figure 8: Thermal Comfort Index chat showing results from green spaces and Built-up Areas/Bare Grounds (Non green Spaces). Source: Author (2016)

Figure 8 gives a graphical view of the results displayed in table 4.4; the chart also featured trend lines (Moving Averages) that shows how each variable rise and fall from one zone to another.

4.5 Discussion of Results

The NDVI Map of Study Area (FCT) is indicated with figure 2 from Landsat Operational Land Imager (OLI) ETM+ imagery of Abuja. The image shows the major vegetation distribution of the area and the built-up areas/bare grounds. Figure 3 is the thermal Map of Study Area (FCT) in 2015. The image shows the different heat distributions in Federal Capital Territory (FCT). In contrast to the method used by Qiu*et al.* (2001), who used mono-window algorithm to generate the LST (Land Surface Temperature) map. The mono-window algorithm requires three parameters; emissivity, transmittance and effective mean atmospheric temperature (Sobrino*et al.*, 2004). The atmospheric water vapour content and the near surface air temperature were used to calculate the air transmittance and effective mean atmospheric temperature (Liu and Zhang, 2011). The third parameter is emissivity was calculated from NDVI. This study used DN (Digital Number) to calculate the band radiance, also the radiance generated was in-turn used to generate the temperature at the satellite level followed by the generation of the land surface emissivity which also made use of the already generated NDVI (Normalised Difference Vegetation Index) followed by the land surface temperature (LST).

Figures5 and 6show the comparison of the extracted NDVI map of Study Area and the Thermal Map of the same area. The figures reveal that there is an inverse relationship between temperature and vegetation from the maps (NDVI and Thermal maps). This is evident from the 22 points that were surveyed (11 points with green spaces and 11 points with built-up area/bare grounds). The analysis also shows that areas with more vegetation cover have lower air temperature compared to areas with no vegetation (built-up areas). figure 7 clearly indicates this and also shows the graphical representation of the air temperature readings derived from the different points, it was discovered from the line graph that the areas with vegetation cover tend to have a lower temperature with an average of 3-4°C compared to build-up area/bare grounds.

On the other hand Table 6 shows the Thermal Comfort Indices of both Green Spaces and Built-up Area/Bare Grounds, the table was colour coded to show the areas that comply with the ET (Efficient Temperature) rating of the thermal comfort index and areas that does not comply, Green represents ideal results, Blue represents areas within acceptable range, Orange represents areas with manageable results while red indicates areas that are not within acceptable range, it was noticed from the results obtained that out of the (11) areas selected in the green zone; three (3) zones did not fall within acceptable value, the three zones have values 0.59, 0.71 and 0.56 which falls short of the ± 0.5 acceptable value. This is as a result of the green spaces in the zone not being more than one hectare (1ha) and it consists of mostly lawn and shrubs, it is known that areas that tend to have an appreciable effect on human thermal comfort are areas with dense population of trees, because the canopies help mitigate the effect of urban heat distribution among other things. Also, for the Buil-up areas, it was noticed that Nine (9) out of Eleven (11) locations fall short of the acceptable values, while Two (2) of the points fall within the acceptable regions with values; 0.21 and 0.13 respectively, this difference is due to the fact that the two locations with the acceptable values are in close proximity to major green areas in the study area.

The above results further confirmed the effect of Green Spaces on Heat Distribution, it is more evident now that green spaces helps reduce heat, therefore an inverse relationship exists between green spaces and heat distribution, i.e. the more the green space the lower the temperature distribution of a particular area.

5. Conclusion

Through the NDVI and thermal satellite imageries of FCT Abuja, 2015, it was noted that there is a strong relationship between the vegetation distribution and Heat distribution in FCT, 22 points were picked based on two criterion, (i) Areas with Vegetation, (ii) Built-up areas/Bare Grounds. Comparing the results obtained from FCT NDVI map and Thermal Map, it was noted that the 11 points with high NDVI value (vegetation cover) are relatively cooler (lower in temperature) on the thermal map while the 11 points that represents Built-up area/Bare Grounds (non vegetated area) i.e. Low NDVI values are hotter (have a high temperature).

Also, the micro temperature data taken from the 22 points during the ground survey wasfound to correlate with the result from the satellite imagery, temperature readings taken from those locations shows a significant temperature difference between the 11 areas with vegetation cover and the 11 areas with built-up area/Bare grounds, it was noted that the areas with vegetation is significantly lower in temperature than the built-up areas by an average of 4°C. The result of the 22 points that was investigated was used to calculate the Human thermal comfort in FCT Abuja Using the Effective Temperature (ET) Profile and discovered that the areas with low vegetation cover has a significantly low thermal comfort index compared to the non-vegetated areas.

This research has come up with the following recommendations:

- 1. Selective planting of trees: Mature trees promote cooling through their evapotranspiration capacity and the area of shade they provide. Therefore, tree planting should be encouraged to reduce the effect of urban heat island and help reduce the heat distribution in the area.
- 2. Vegetation around buildings: Walls of building are one of the main causes of temperature increase in the urban areas; therefore having vegetation around buildings can go a long way in reducing the temperature of the area, reducing the rate at which the walls get heated up. Various plant species provide heat and pollution-mitigating capacities, and compact multi-layering of diverse plant species can help improve overall resilience to drought, heat and pollution. Among plant types, trees have an

exceptional ability to capture and filter multiple air pollutants, including ground-level ozone, sulphur dioxide, nitrogen oxides and particulate matter. Trees are also significantly associated with improved thermal comfort and relief from heat stress at the street level and neighbourhood scale, particularly during hot seasons and times of day.

3. Green roofs: Green roofs is one of the best ways to reduce the heat of an area because, a green roof has a higher albedo compared to dark roofs, and the higher the albedo the higher the spectral reflectance of the object and the higher the reflectance, the lower the heat accumulation, therefore the use of green roofs should be encouraged to help reduce the heat. Implementing these measures will not only help to reduce the energy demand but will also provide healthy environmental benefits such as reduced mortality due to heat stroke, less CO₂ emission, increased thermal comfort, reduced air pollution and hence less lung diseases.

REFERENCES

- Akbari, H. (2011). Cool Roofs and Pavements to Cool the World: An Integrated Mitigation/Adaptation Strategy for Cities. In *Resilient Cities 2011: 2nd World Congresson Cities and Adaptation to Climate Change*. Montreal, Canada.
- Elsayed, I. S. M. (2009). A Study on the Urban Heat Island of the City of Kuala Lumpur, Malaysia. In *IASTED International conference on Environmental Management and Engineering*. Alberta, Canada.
- Giannaros, T. M., &Melas, D. (2012). *Study of the Urban Heat Island in a Coastal Mediterranean City: The Case Study of Thessaloniki, Greece. Atmospheric Research, 118*, 103–120. doi:10.1016/j.atmosres.2012.06.006
- Senanayake, I. P., Welivitiya, W. D. D. P., &Nadeeka, P. M. (2013). Remote Sensing Based Analysis of Urban Heat Islands with Vegetation Cover in Colombo city, Sri Lanka using Landsat-7 ETM+ data. Urban Climate. doi:10.1016/j.uclim.2013.07.004
- Wan Mohd, W. M. N., Hashim, S., & Mohd Noor, A. M. (2004). Integrating Satellite Remote Sensing and GIS for Analysing Urban Heat Island. *Built Environment Journal*, 1(2), 34–44.
- Memon, R. A., Leung, D. Y. C., &Chunho, L. (2008). A Review on the Generation, Determination and Mitigation of Urban Heat Island. *Journal of Environmental Sciences(China)*, 20(1), 120–8. Retrieved from <u>http://www.ncbi.nlm.nih.gov/pubmed/18572534</u>
- MacHarg, I. L., 1971, Design with nature. New York:Doubleday, Garden City.
- Devi, S. S. (2003). urban heat islands and environmental impact. Orbit. Nesdis. Noaa. Gov.
- Akbari H. and Konopacki S. (2001). *Calculating energy-saving potentials of heat island reduction strategies*. *Energy Policy*, 33:721-756.
- Bretz, S., Akbari, H., and A, R. (1998). *Practical issues for urban solar-reflective materials to mitigate urban heat islands. Atmospheric Environment*, 32:95–101.
- Roelofs, J., 1999, Building and designing with nature: Urban design. In: J. Roelofs (Eds.), *Greening cities: Building justand sustainable communities*. New York: Bootstrap Press.
- De Vries S (2000). Regional differences in the demand for and supply of nature-based recreation within The Netherlands. In: Krishnapillay, B, et al. (eds) Forests and Soiety: the role of research. Proceed- ings of the XXI IUFRO World Congress 2000, Malaysia, 7–12 August. IUFRO/FRIM, Vienna/Kuala Lumpur, Vol. 1, pp 453–464

- Fiala, D., Havenith, G., Bröde, P., Kampmann B. and Jendritzky, G., 2012, 'UTCI-Fiala multi-node model of human heat transfer and temperature regulation', Int J Biometerol, 56(3) 429–424.
- Blazejczyk, K., Y. Epstein, G. Jendritzky, H. Staiger and B. Tinz, (2012) 'Comparison of UTCI to selected thermal indices', Int J Biometeorol, (56) 515–535.
- Stewart H, Owen S, Donovan R, MacKenzie R & Hewitt N (2001) *Trees and sustainable urban air quality*. Brochure, Lancaster University and Centre for Ecology and Hydrology, Lancaster